



2 light bar

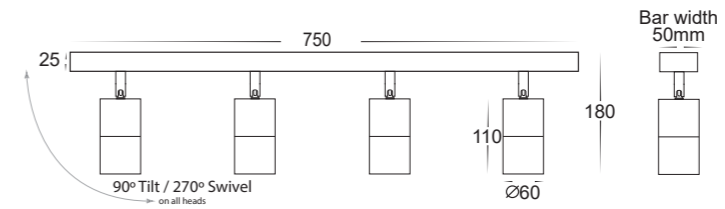


4 light bar

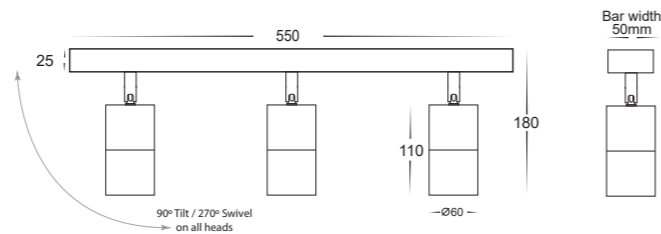


3 light bar



3 light round plate

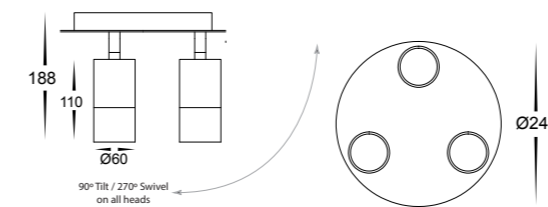

4 light square plate

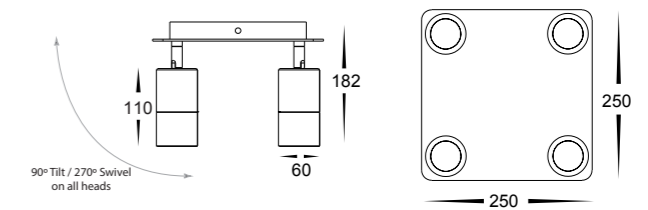

## Tivah Titanium Aluminium

- Adjustable spotlights
- Titanium Coloured Aluminium
- 90° tilt & 270° swivel
- High output reflector to maximise light
- IP Rating: IP54



Compatible with  
**Tri-Colour 9in1**  
3w, 5w, 7w  
LED Globe



| IMAGE | PART NUMBER          | COLOUR TEMP             | LUMENS                           | INPUT | INCLUDED LED                        |
|-------|----------------------|-------------------------|----------------------------------|-------|-------------------------------------|
|       | <b>HV4001T-2-TTM</b> | 3000K<br>4000K<br>5500K | 2x 270lm<br>2x 285lm<br>2x 300lm | 240v  | <b>Tri-Colour</b><br>2x 5w GU10 LED |
|       | <b>HV4001T-3-TTM</b> | 3000K<br>4000K<br>5500K | 3x 270lm<br>3x 285lm<br>3x 300lm | 240v  | <b>Tri-Colour</b><br>3x 5w GU10 LED |

| IMAGE | PART NUMBER              | COLOUR TEMP             | LUMENS                           | INPUT | INCLUDED LED                        |
|-------|--------------------------|-------------------------|----------------------------------|-------|-------------------------------------|
|       | <b>HV4001T-4-TTM</b>     | 3000K<br>4000K<br>5500K | 4x 270lm<br>4x 285lm<br>4x 300lm | 240v  | <b>Tri-Colour</b><br>4x 5w GU10 LED |
|       | <b>HV4001T-3-TTM-RND</b> | 3000K<br>4000K<br>5500K | 3x 270lm<br>3x 285lm<br>3x 300lm | 240v  | <b>Tri-Colour</b><br>3x 5w GU10 LED |
|       | <b>HV4001T-4-TTM-SQ</b>  | 3000K<br>4000K<br>5500K | 4x 270lm<br>4x 285lm<br>4x 300lm | 240v  | <b>Tri-Colour</b><br>4x 5w GU10 LED |

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 275 - 282  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 362

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 275 - 282  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 362