

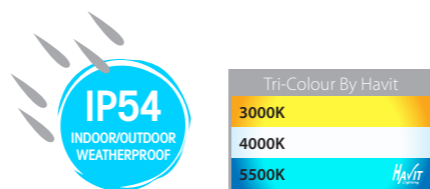


Bata Stainless Steel

- Brick light with plain face & grill cover
- Stainless Steel 316 Marine Grade Cover And Stainless Steel Poly Powder Coated Black Cover
- Powder coated die cast aluminium body
- Cutout with Canister: 158mm x 56mm
- Installation Depth: 60mm
- Frosted tempered glass
- IP Rating: IP54

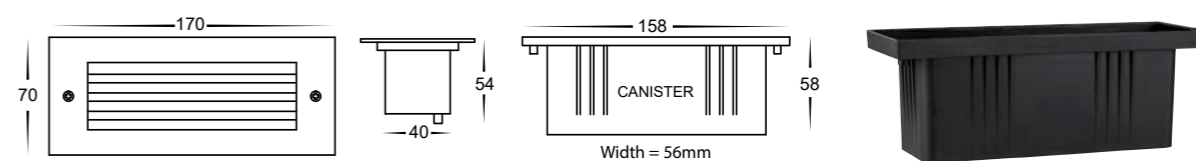

| IMAGE | PART NUMBER | COLOUR TEMP | LUMENS | INPUT | INCLUDED LED |
|-------|--------------------------|-------------------------|-------------------------|--------|---|
| | HV3005T-SS316-12V | 3000K 4000K 5500K | 480lm 510lm 540lm | 12v DC | Tri-Colour Built-in 6w LED See page 275 for compatible drivers |
| | HV3005T-BLK-12V | 3000K 4000K 5500K | 480lm 510lm 540lm | 12v DC | Tri-Colour Built-in 6w LED See page 275 for compatible drivers |
| | HV3006T-SS316-12V | 3000K 4000K 5500K | 480lm 510lm 540lm | 12v DC | Tri-Colour Built-in 6w LED See page 275 for compatible drivers |
| | HV3006T-BLK-12V | 3000K 4000K 5500K | 480lm 510lm 540lm | 12v DC | Tri-Colour Built-in 6w LED See page 275 for compatible drivers |

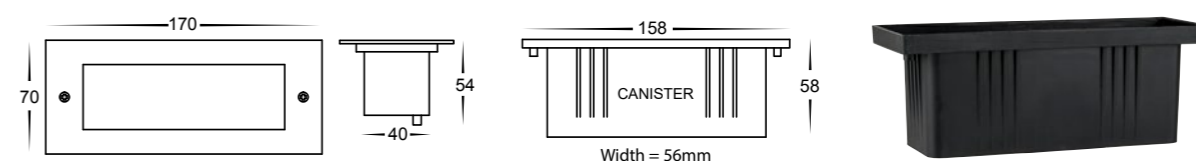

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 275 - 282 Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 362

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 275 - 282 Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 362