






**Zigbee Wall Switch
HV9101-ZB-5C**



**Single Coloured Zigbee
LED Touch Panel
HV9101-ZB-SCTP**



**RGBW Zigbee
LED Touch Panel
HV9101-ZB-RGBWTP**

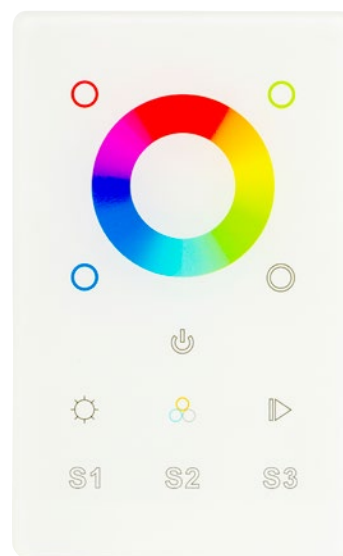

120

75

75

IMAGE	PART NUMBER	DESCRIPTION	POWER
	HV9101-ZB-5C	<ul style="list-style-type: none"> • Zigbee LED Dimming Controller • Input Voltage: 3v DC • Dimming range: 0.1-100% • Operation Frequency: 2.4GHZ • Compatible with all Zigbee Receivers • Supplied with magnetic wall mount 	3v DC Battery (CR2430)
	HV9101-ZB-SCTP	<ul style="list-style-type: none"> • Single Coloured Zigbee LED Touch Panel • Compatible with Zigbee Receivers • Input Voltage: 240 AC • Preset 25% 50% 75% 100% brightness • Six Scenes • Dimming range: 0.1-100% • Operation Frequency: 2.4GHZ <p><i>Must be used with HV9105-ZB-DIM</i></p>	240v
	HV9101-ZB-RGBWTP	<ul style="list-style-type: none"> • RGBW Zigbee LED Touch Panel • Compatible with Zigbee Receivers • Three scenes • Input Voltage: 240v AC • Operation Frequency: 2.4GHZ <p><i>Must be used with HV9105-ZB-RGBW</i></p>	240v

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 315 - 324 Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 418 & 420