

Bata Stainless Steel

- Brick light with plain face & grill cover
- Stainless Steel 316 Marine Grade Cover And Stainless Steel Poly Powder Coated Black Cover
- Powder coated die cast aluminium body
- Cutout with Canister: 158mm x 56mm
- Installation Depth: 60mm
- Frosted tempered glass
- IP Rating: IP54


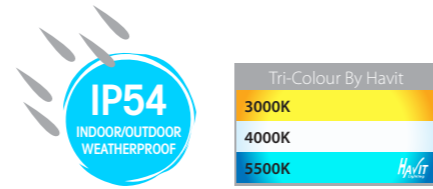


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3005T-SS316-12V	3000K 4000K 5500K	480lm 510lm 540lm	12v DC	Tri-Colour Built-in 6w LED
	HV3005T-BLK-12V	3000K 4000K 5500K	480lm 510lm 540lm	12v DC	Tri-Colour Built-in 6w LED
	HV3006T-SS316-12V	3000K 4000K 5500K	480lm 510lm 540lm	12v DC	Tri-Colour Built-in 6w LED
	HV3006T-BLK-12V	3000K 4000K 5500K	480lm 510lm 540lm	12v DC	Tri-Colour Built-in 6w LED

HAVIT COMPATIBLE ACCESSORIES




See pages 315-324 for compatible drivers.
All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver.



HV3005T-SS316




HV3005T-BLK

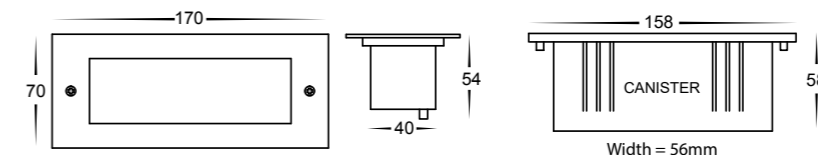

HV3006T-SS316



HV3006T-BLK

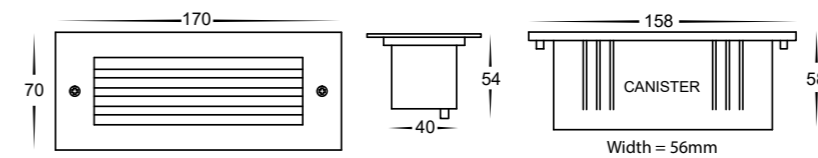

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 315 - 324
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 418 & 420

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 315 - 324
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 418 & 420