

Halo Aluminium

- Indoor or Outdoor Wall Light
- Aluminium Poly Powder Coated Black or White
- Polycarbonate Diffuser
- Triac Dimmable
- IP Rating: IP65


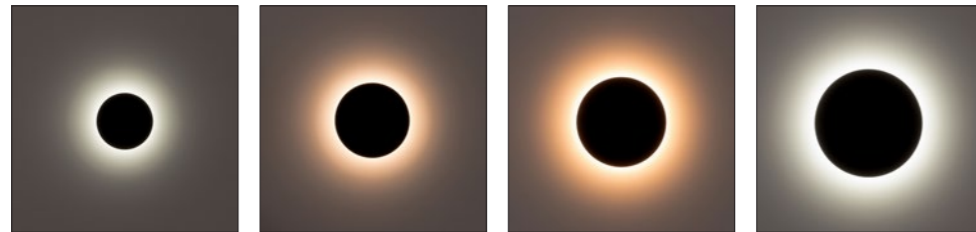



IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3591T-BLK	3000K 4000K 5500K	540lm 550lm 560lm	240v	Tri-Colour Built-in 7w SMD LED
	HV3591T-WHT				
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3592T-BLK	3000K 4000K 5500K	960lm 1020lm 1080lm	240v	Tri-Colour Built-in 12w SMD LED
	HV3592T-WHT				
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3593T-BLK	3000K 4000K 5500K	1315lm 1380lm 1440lm	240v	Tri-Colour Built-in 18w SMD LED
	HV3593T-WHT				
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3594T-BLK	3000K 4000K 5500K	1920lm 2040lm 2160lm	240v	Tri-Colour Built-in 24w SMD LED
	HV3594T-WHT				




HV3592T




HV3591T

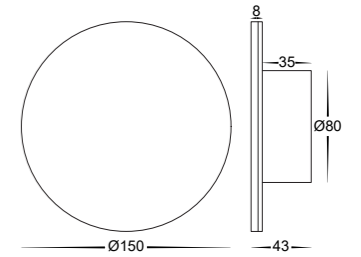

HV3593T

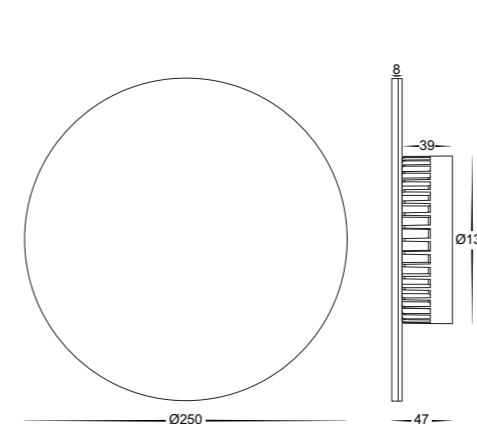

HV3594T

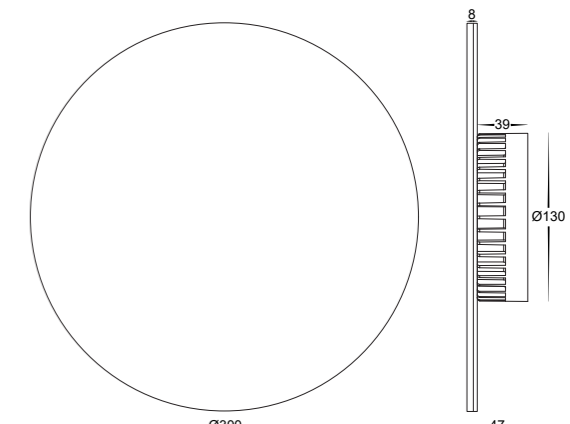

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 315 - 324
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 418 & 420

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 315 - 324
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 418 & 420