

Taper Copper

- Wall wedge
- Copper body
- Frosted tempered glass
- Fast weathering for classic aged appearance
- IP Rating: IP44





IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV3601T-CP	3000K 4000K 5500K	700lm 720lm 740lm	240v	Tri-Colour 9w E27 LED
	HV3602T-CP	3000K 4000K 5500K	270lm 285lm 300lm	240v	Tri-Colour 5w GU10 LED
	HV3605T-CP	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	Tri-Colour 5w MR16 LED
	HV3608C-CP	5500K	110lm	12v DC	1.5w SMD G4 Bi pin
	HV3608W-CP	3000K	90lm		

HAVIT COMPATIBLE ACCESSORIES

MR16 Models are compatible with 12v & 24v Havit Tri-Colour 9in1 Globes	HV9507	3000K 4000K	240lm-630lm	12v DC	Tri-Colour 3W/5W/7W MR16 LED
	HV9508	5500K	240lm-630lm	24v DC	
GU10 Models are compatible with Havit Tri-Colour 9in1 Globes	HV9506D	3000K 4000K 5500K	240lm-630lm	240v	Tri-Colour 3W/5W/7W GU10 LED

See pages 315-324 for compatible drivers. All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver.

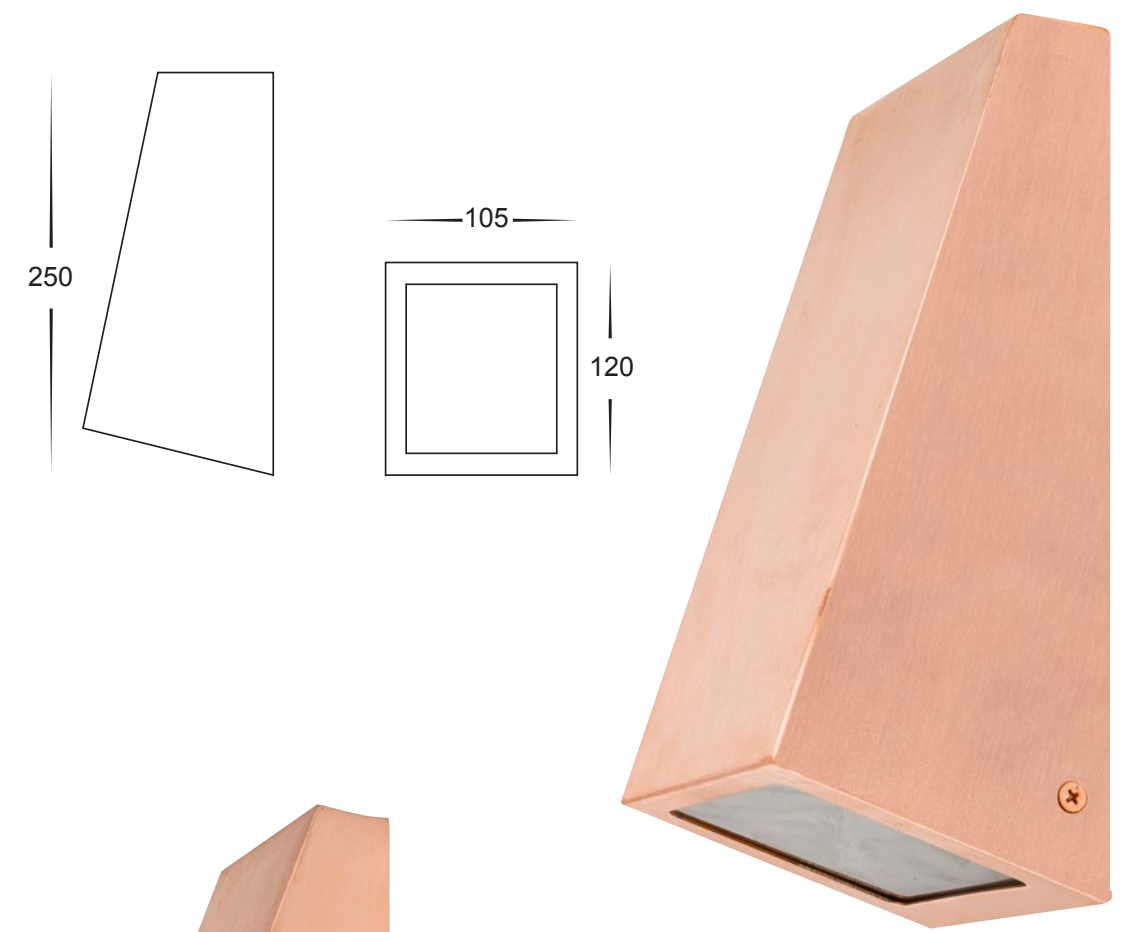


HV3601T-CP



HV3602T-CP / HV3605T-CP



HV3608C-CP / HV3608W-CP

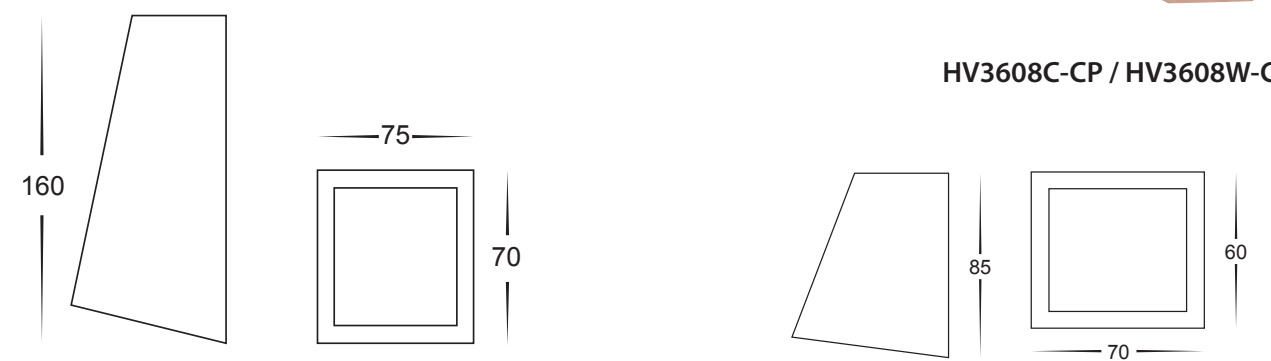

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 315 - 324
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 418 & 420

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 315 - 324
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 418 & 420