

AnglePlay® Template Holder

By Julie Luoma





Supplies:

1 yard fabric for outside

6"x28" Mesh for pocket

2/3 yard fabric for flap

11.5"x28" fusible stabilizer or batting,

Elastic

Fabric marking chalk or pen/pencil

Ruler

Rotary cutter/cutting board

6-8" elastic hair band or other elastic cord

Cut:

Outside fabric - 27"x30"

Off the Wall Quilt

PO Box 391023

Deltona, FL 32739

206-618-2167

Flap fabric— 20"x27.5"

Mesh for pocket—6" x 28"

Stabilizer or

batting—11.5"x28"





Page 1

AnglePlay® Template Holder Pattern



Supplies:

1 yard fabric for outside

6"x28" Mesh for pocket

2/3 yard fabric for flap

11.5"x28" fusible stabilizer or batting,

Elastic

Fabric marking chalk or pen/pencil

Ruler

Rotary cutter/cutting board

6-8" elastic hair band or other elastic cord



Cut:


Outside fabric - 27"x30"

Flap fabric—20"x27.5"

Mesh for pocket—6" x 28"

Stabilizer or batting—11.5"x28"

Prepare pieces:



Main Body:


Pocket: Page 2

Turn one long edge of the pocket piece down ¼" and stitch in place.

Flap:

Fold the flap fabric in half the long way, right sides together. Using a plate or bowl, round the two corners opposite the folded edge. A couple of pins near the curved edges will help to keep everything in place.


Stitch a 1/4" seam from one folded edge around the curved sides towards the other side, stopping 2" and back stitching a couple of stitches.

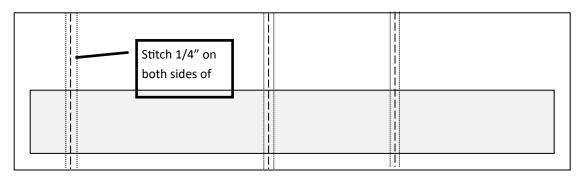

Stitch 1/4" on each side of the marked lines, from top to bottom of the main body through all layers.



With the pocket up, center the flap with the creased edge even with the creased edge of the

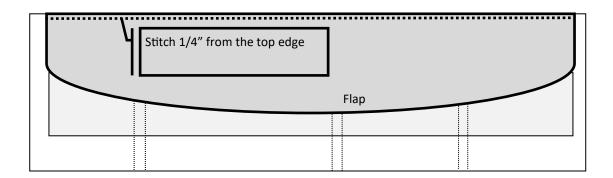

Lay the piece with the pocket facing up and the flap up out of the way.


Turn the edges of the main body in 1/2" and press a crease. Reopen edges. (A)


At the bottom corners, fold the points to the corner of the pocket, pressing firmly with your fingers. (B)

Fold the angled corner edge you just made to slightly overlap the corner of the of the pocket, again pressing firmly with your fingers and pin in place. (C)

Fold the sides and bottom edge of the main piece in on the creases and then fold over once more, covering the sides of the pocket piece. Fold the same edges over again, overlapping the pocket piece.

At the corners, check to see that the folded edges are meeting correctly.

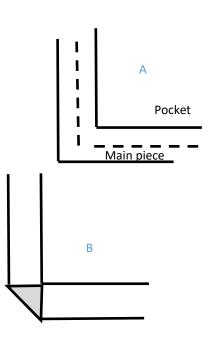



Starting at the top edge with the flap

