

Cheryl Ann's Design Walls by Off the Wall Quilt

Assembly Instructions

Parts List:

- 1 Flannel Wall
- 8 Poles (sides & legs)
- 2 Stabilizer Bars
- 6 Clips
- 4 Corners



IMPORTANT:


Flannel shrinks! We recommend cleaning it with a lint brush but if washing becomes necessary, wash only in cold water and immediately place the flannel back on the fully assembled frame to dry. NEVER put the wet flannel in a dryer or shrinkage will occur.

Step 1:

Lay the flannel wall out flat


Step 2:

Assemble the poles by sliding the sections together. Insert 4 poles into the hemmed edges on each of the 4 sides of the flannel wall

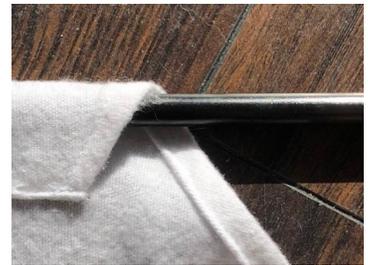

Step 3:

Connect poles at corners using corner pieces.

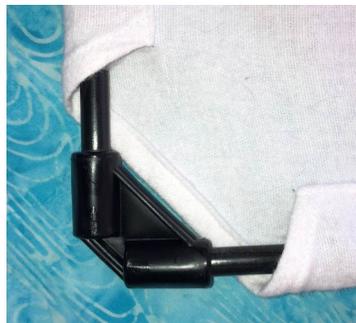

Step 4:

Place a clip on each end of a pole and snap onto the frame (avoiding the silver connecting piece on 72" walls) in approximately the middle of a side. Rotate the wall 90 degrees and add another cross piece. *The clips may be hard to attach the first time, you may need to step on it gently until it "snaps" into place.*



Step 5:

Place a clip on one end of a pole and an end cap on the opposite end. Clip the pole to one side of the frame, towards an outside edge. Repeat with the remaining pole at the opposite edge. These two poles are referred to as "legs".



Step 6:

Clip a stabilizer bar to a "leg" and to the bottom of the frame. Repeat with the remaining stabilizer bar.



Finished:

Stand your wall up and give it a slight twist if it appears warped.

