




# ORACLE LIGHTING

F-150 SIDE MIRROR  
ORACLE PART #5923  
INSTALLATION GUIDE

**TOOLS NEEDED:**  
PANEL TOOL  
T-15 TORX BIT  
NEEDLE NOSE PLIERS  
FLAT HEAD SCREW-  
DRIVER




SCAN TO VIEW INSTALL VIDEO

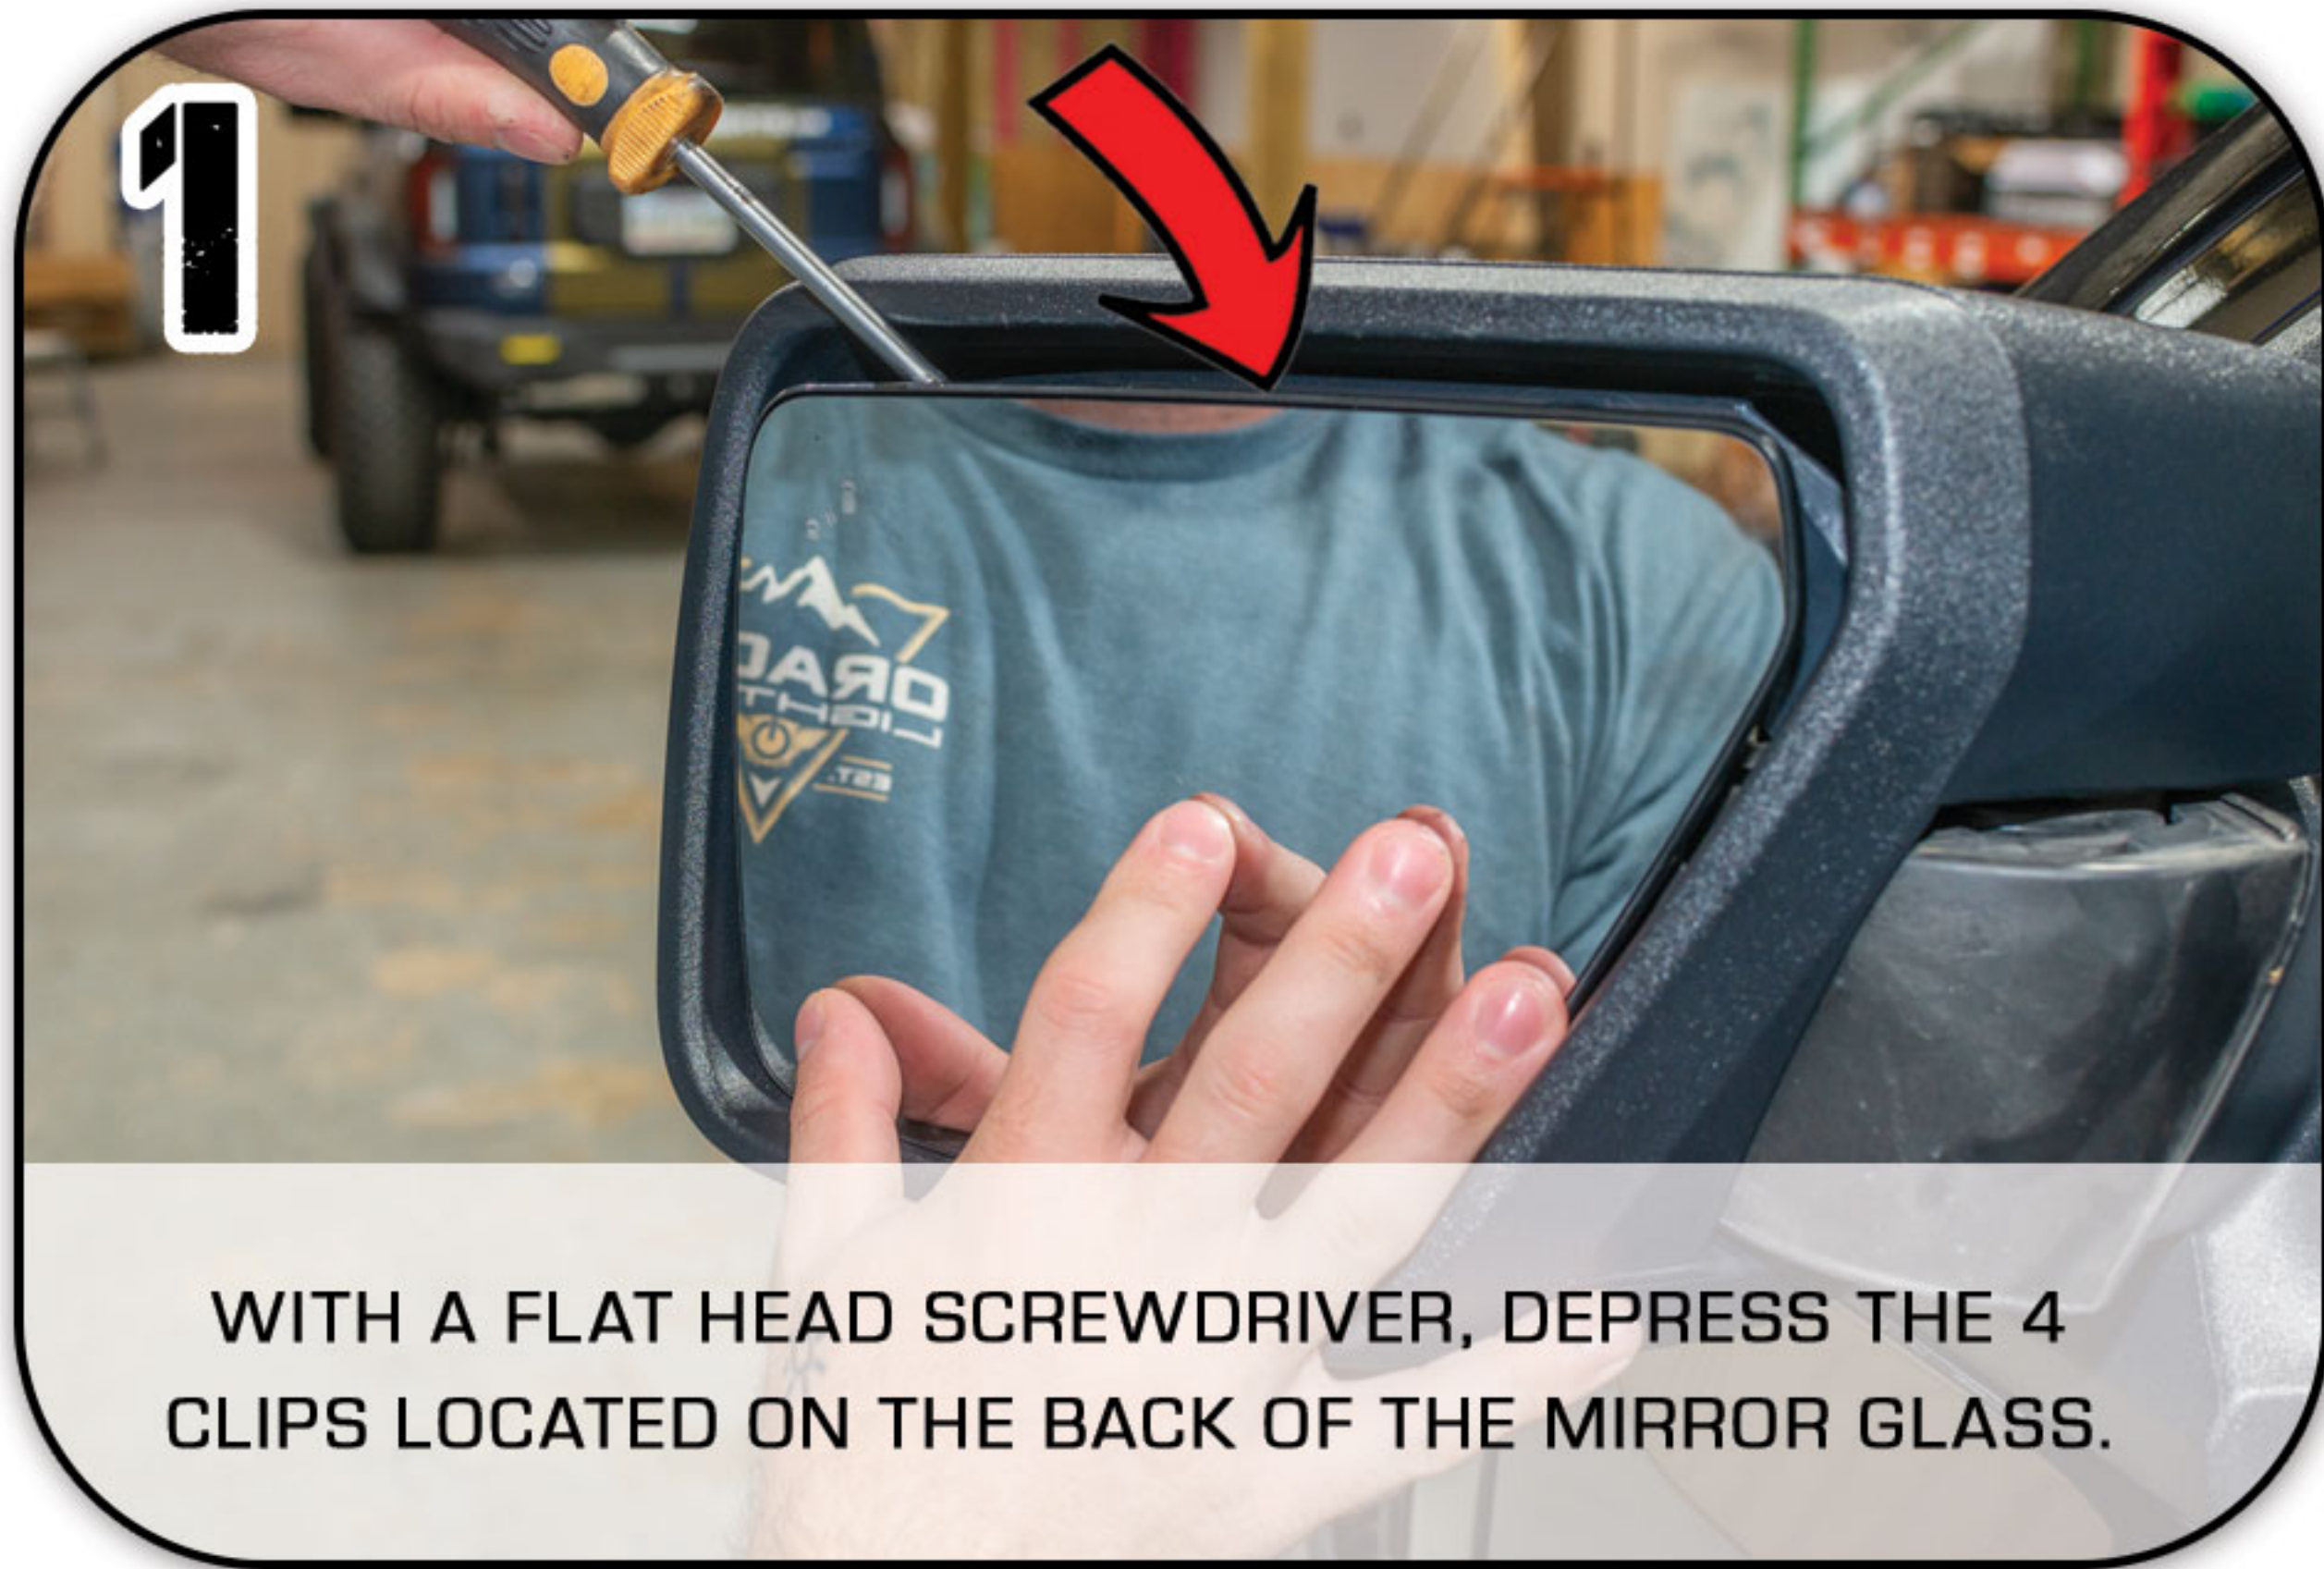

WITH A FLAT HEAD SCREWDRIVER, DEPRESS THE 4 CLIPS LOCATED ON THE BACK OF THE MIRROR GLASS.




THIS IMAGE SHOWS THE CLIPS THAT YOU NEED TO DEPRESS, TO REMOVE THE MIRROR GLASS.

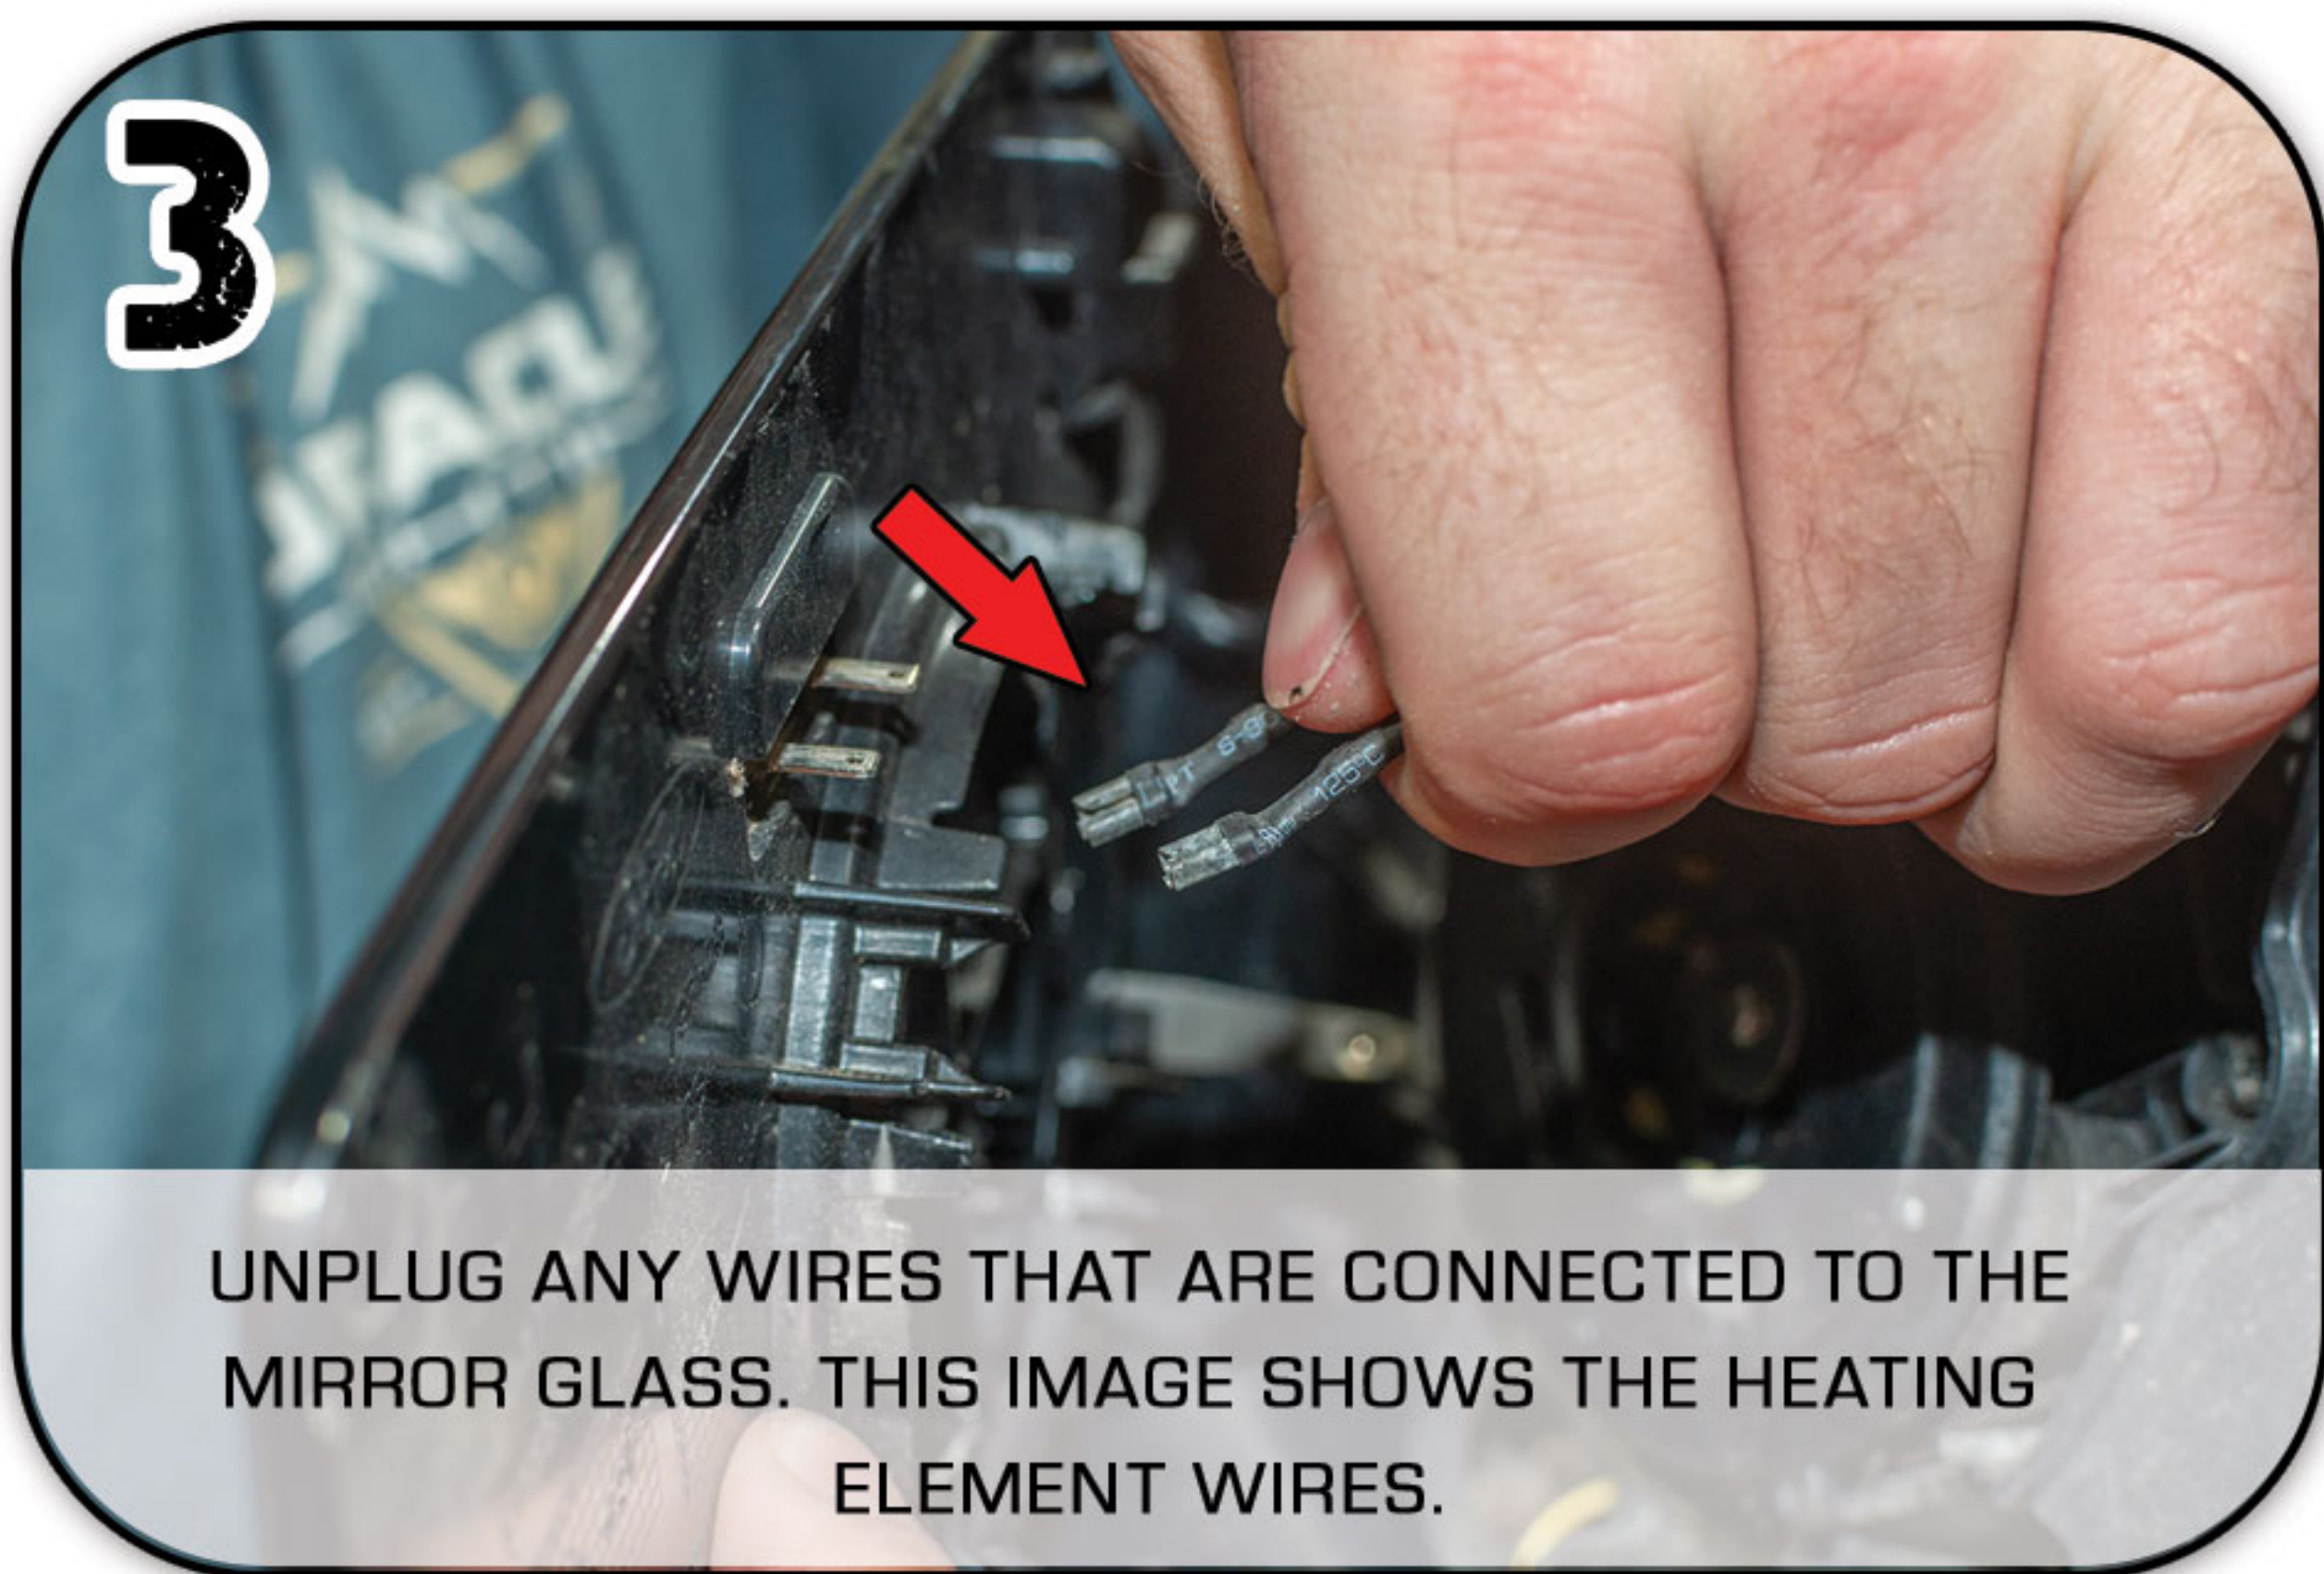

UNPLUG ANY WIRES THAT ARE CONNECTED TO THE MIRROR GLASS. THIS IMAGE SHOWS THE HEATING ELEMENT WIRES.




CONTINUE UN-CLIPPING/DISCONNECTING ANY WIRES PLUGGED INTO THE MIRROR GLASS.

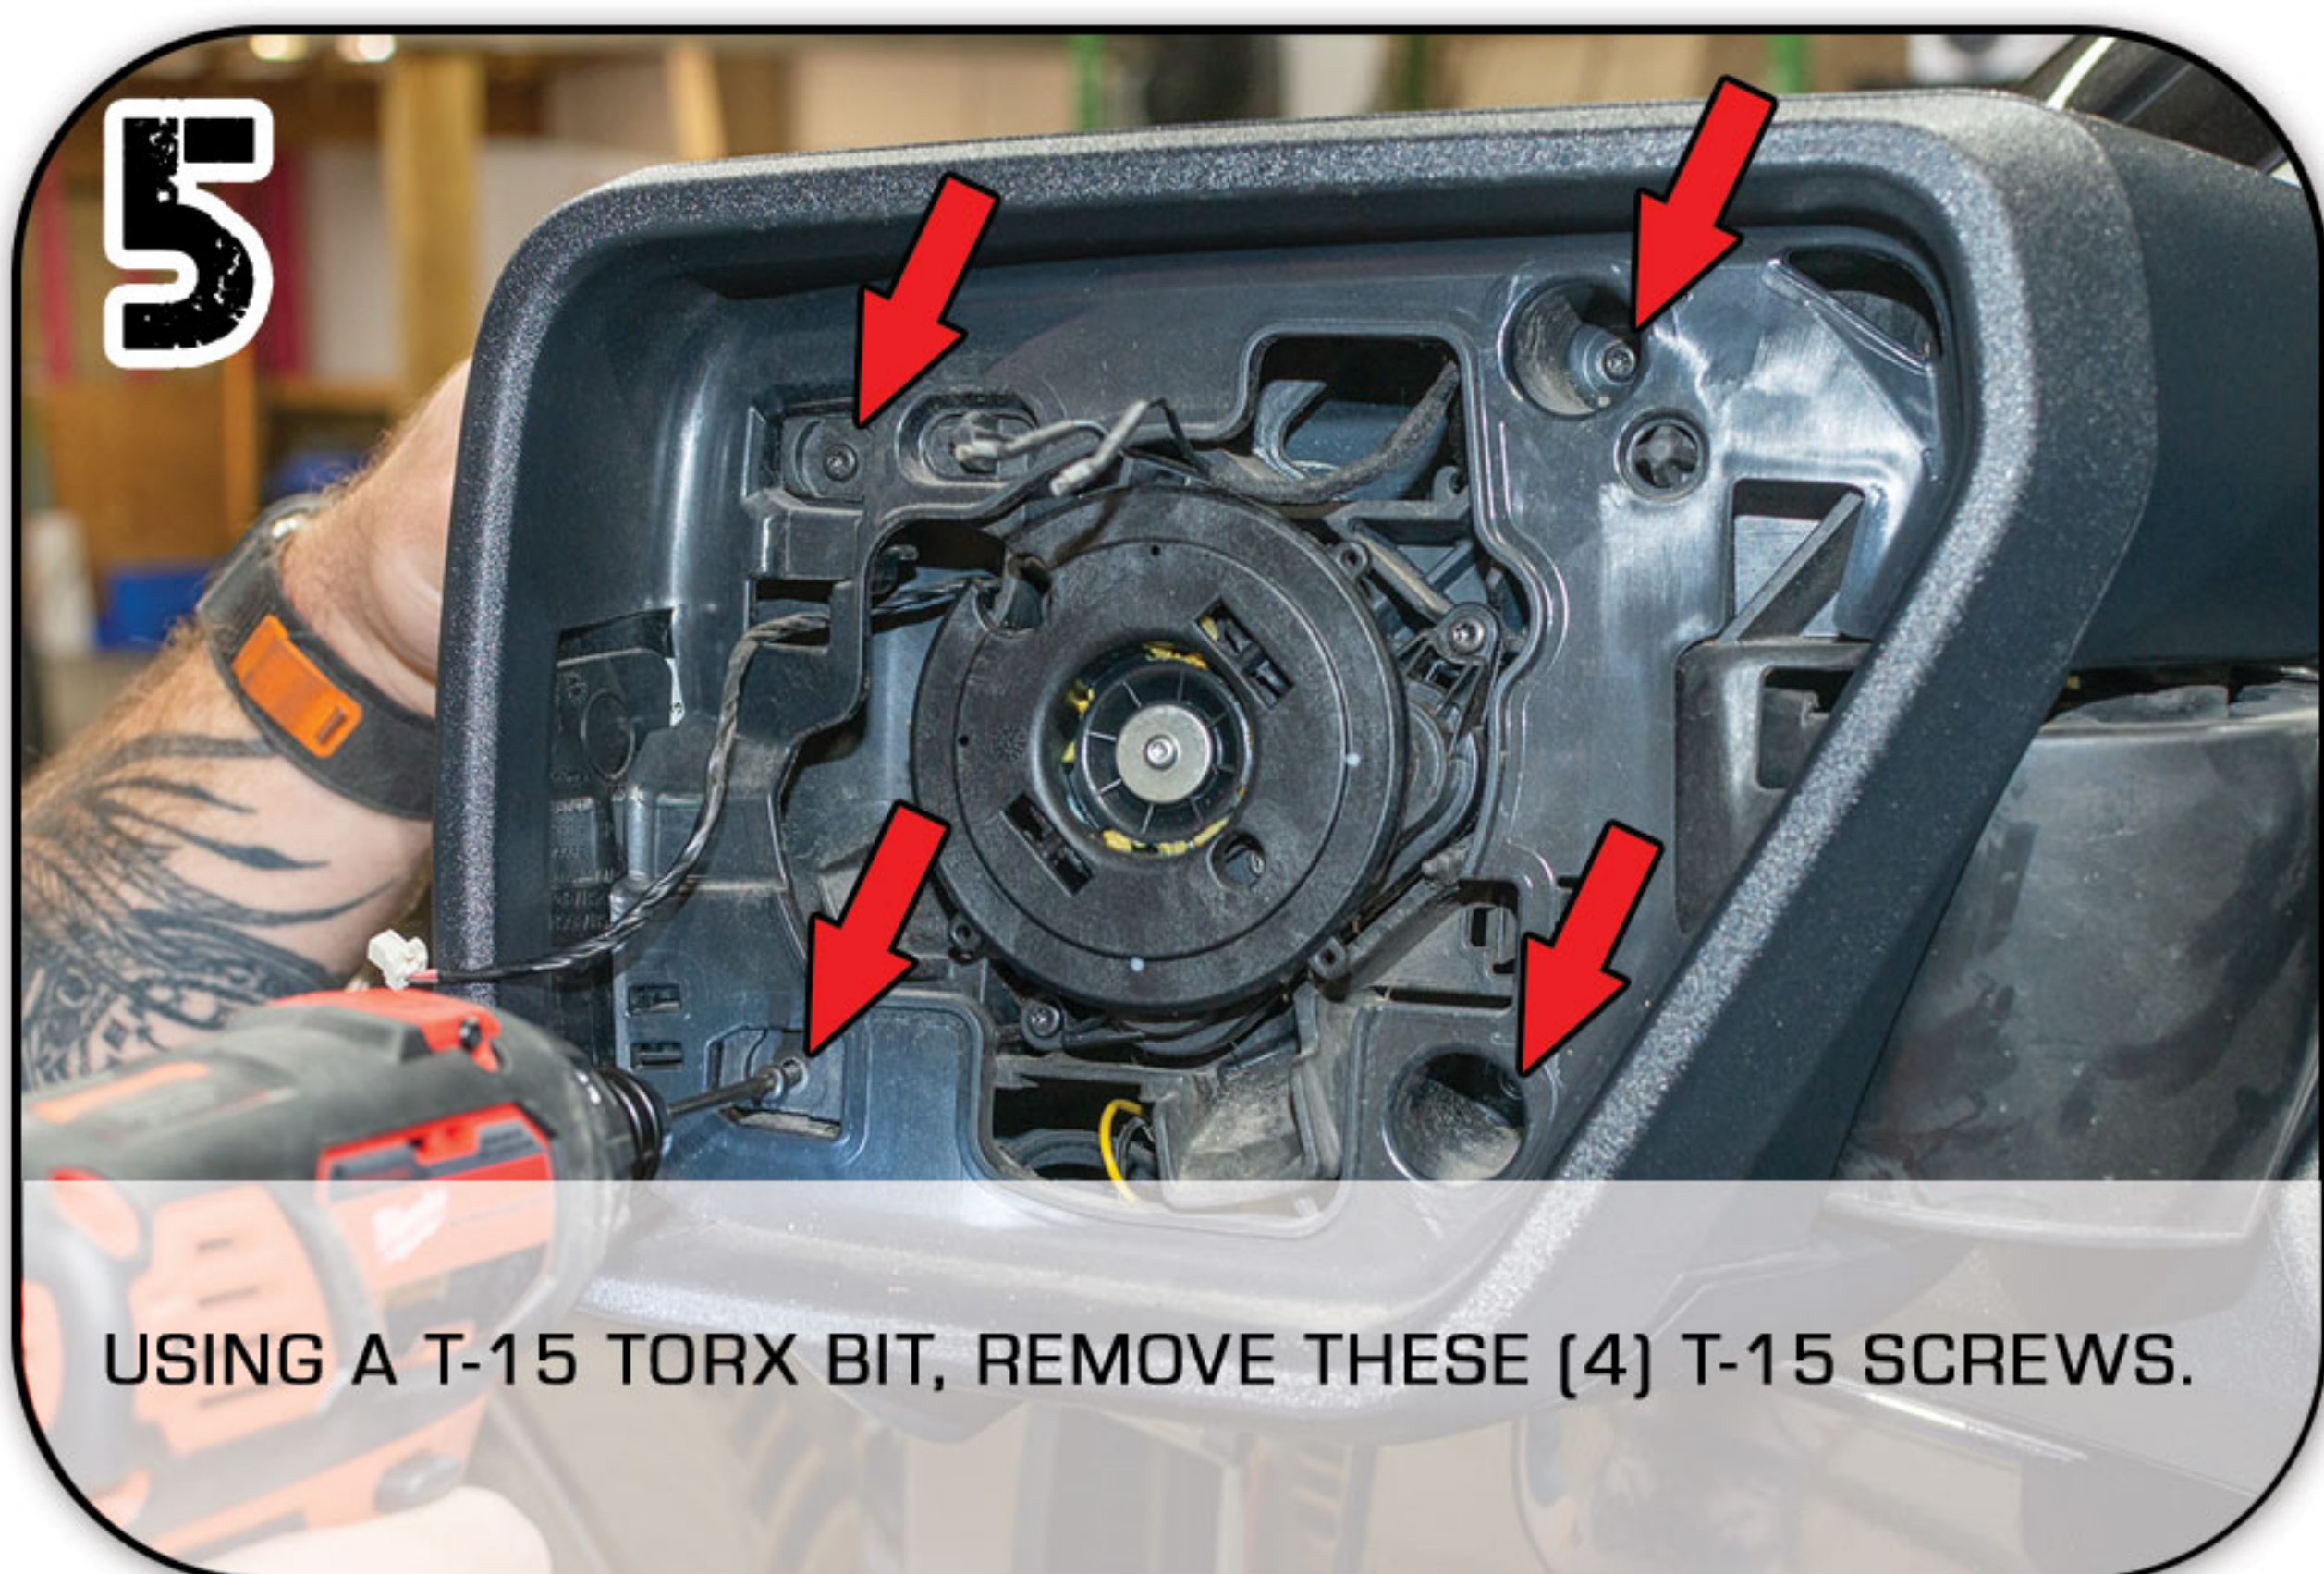

USING A T-15 TORX BIT, REMOVE THESE (4) T-15 SCREWS.



YOU CAN NOW DISCONNECT THE OEM MIRROR CAP FROM THE MIRROR ASSEMBLY.

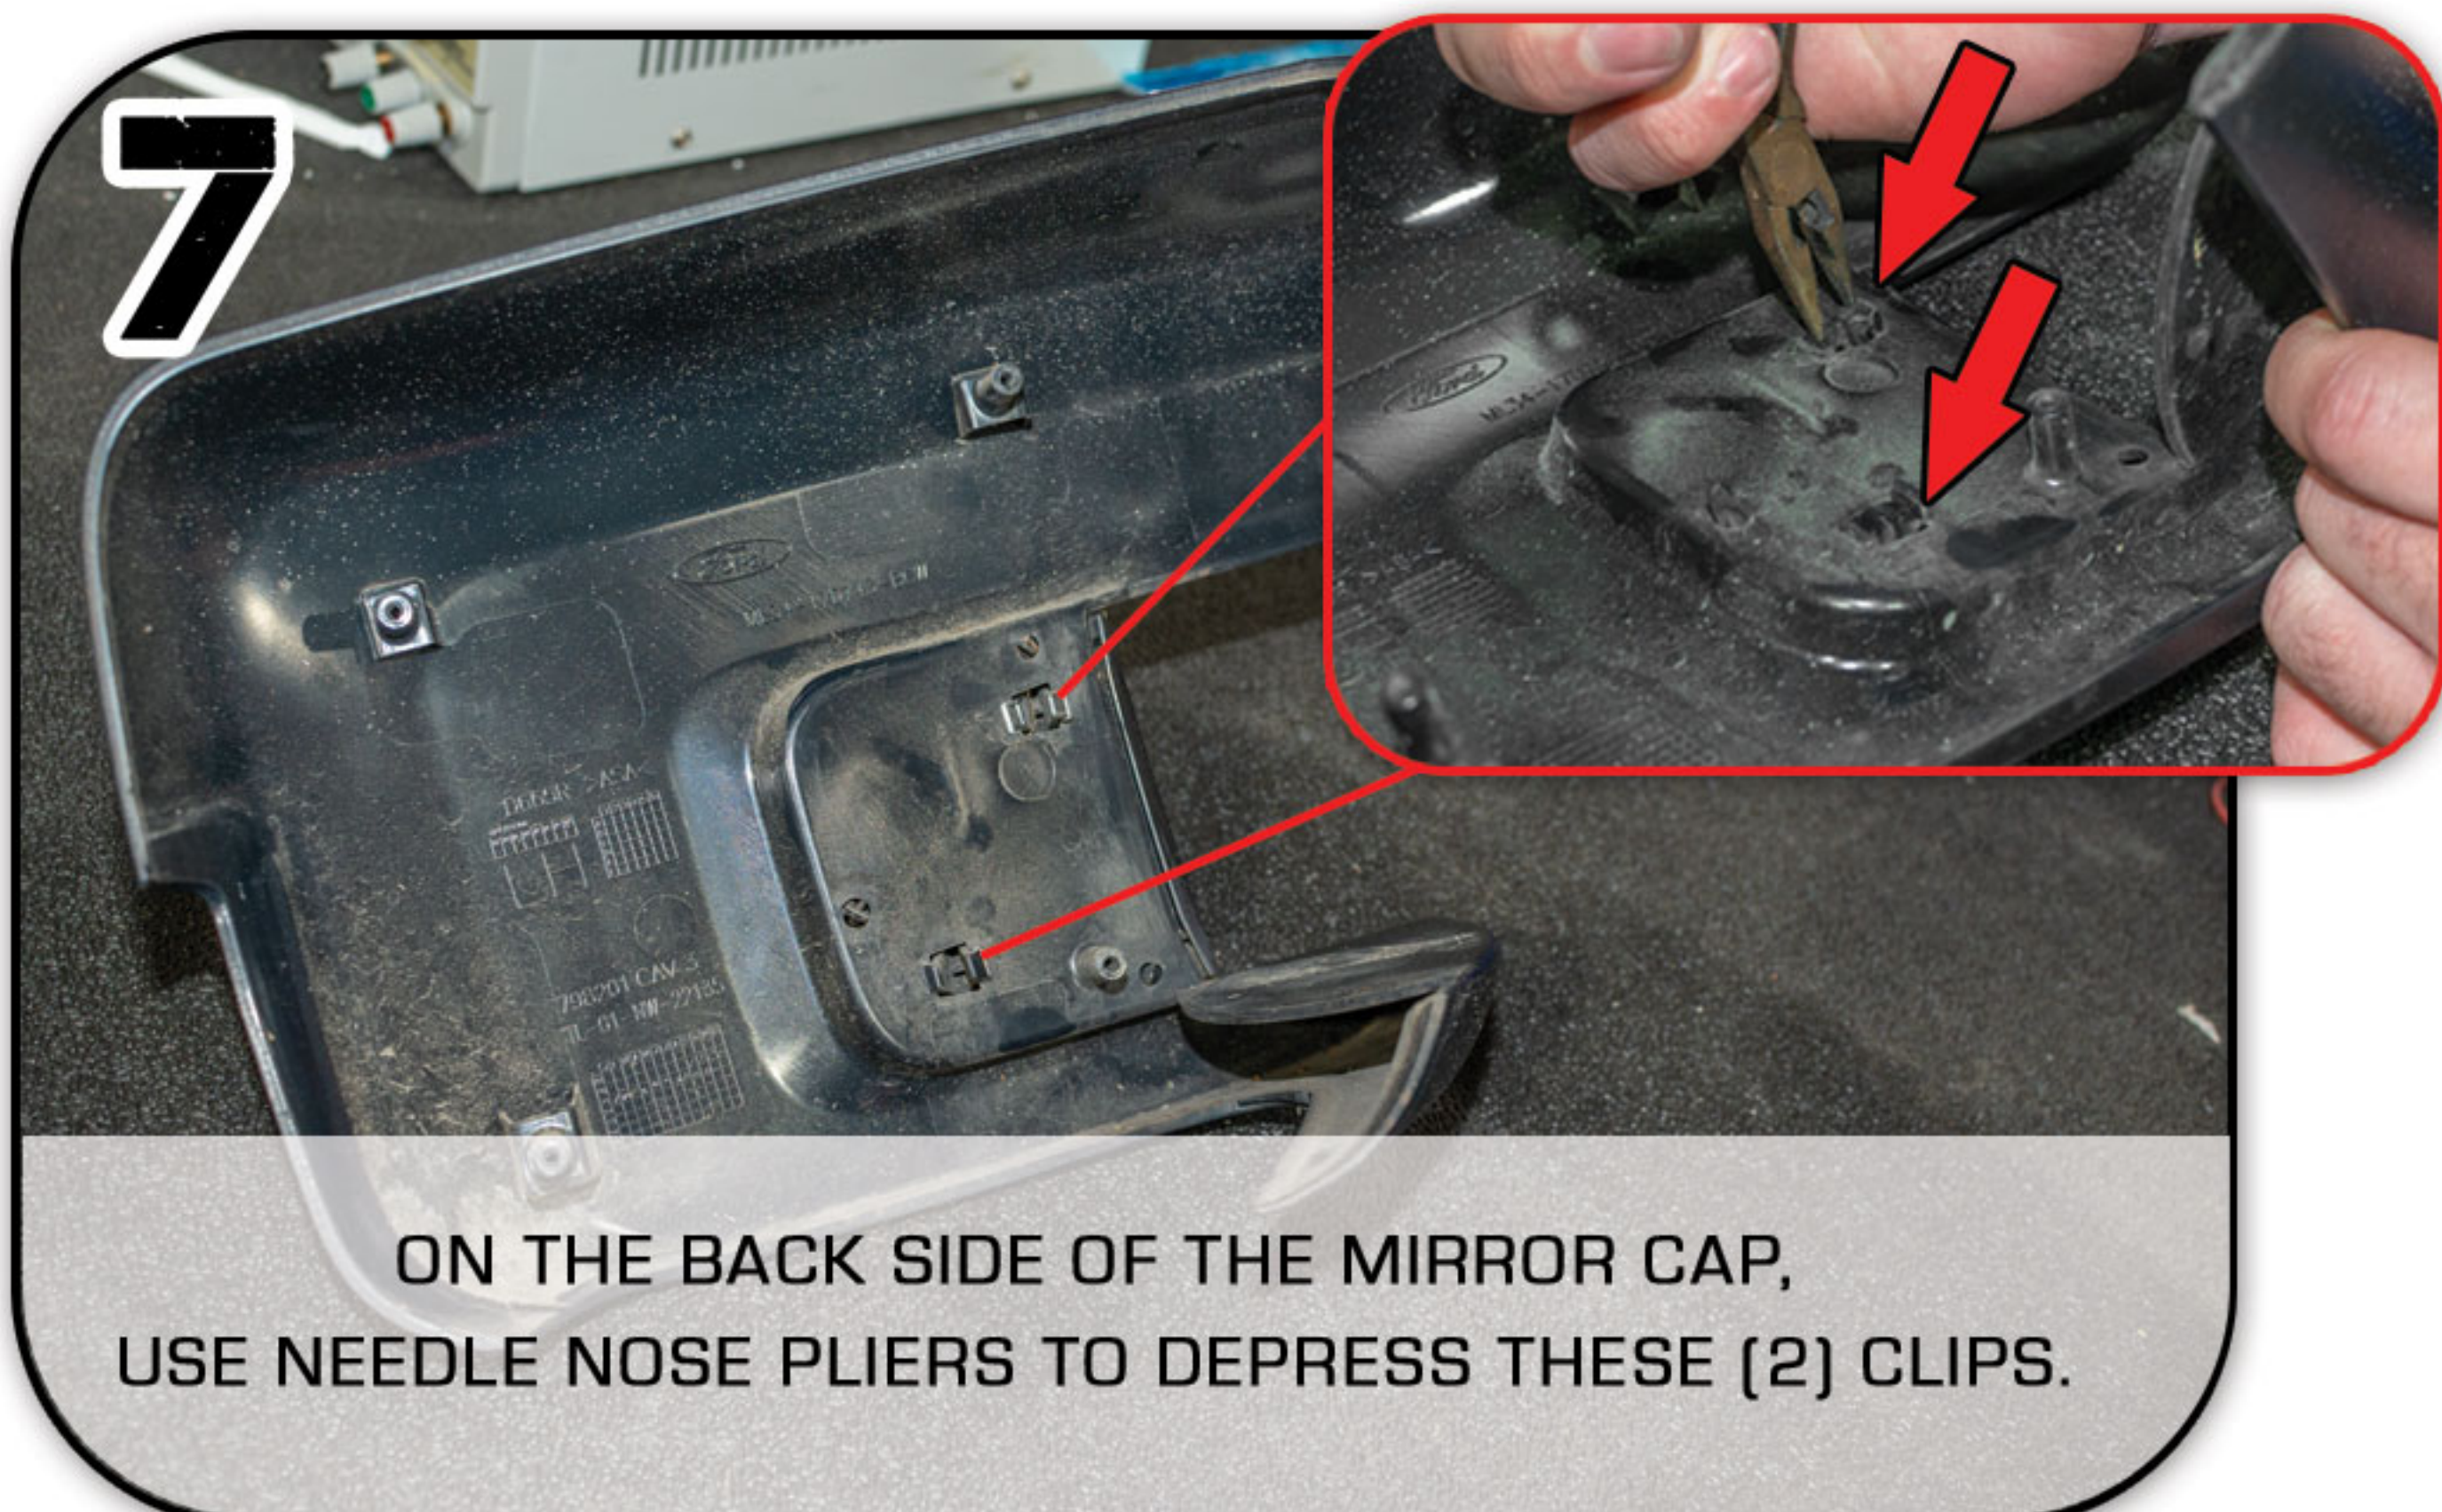

ON THE BACK SIDE OF THE MIRROR CAP, USE NEEDLE NOSE PLIERS TO DEPRESS THESE (2) CLIPS.



ATTACH THE OEM TRIM PIECE TO THE ORACLE MIRROR CAP.



[www.oraclelights.com](http://www.oraclelights.com)

© 2024 ORACLE LIGHTING

4401 Division St.  
Metairie, LA 70002

FOR ADDITIONAL TECHNICAL SUPPORT PLEASE CALL US 1(800)407-5776






# ORACLE LIGHTING

F-150 SIDE MIRROR  
ORACLE PART #5923  
INSTALLATION GUIDE

**TOOLS NEEDED:**  
PANEL TOOL  
T-15 TORX BIT  
NEEDLE NOSE PLIERS  
FLAT HEAD SCREW-  
DRIVER



SCAN TO VIEW INSTALL VIDEO

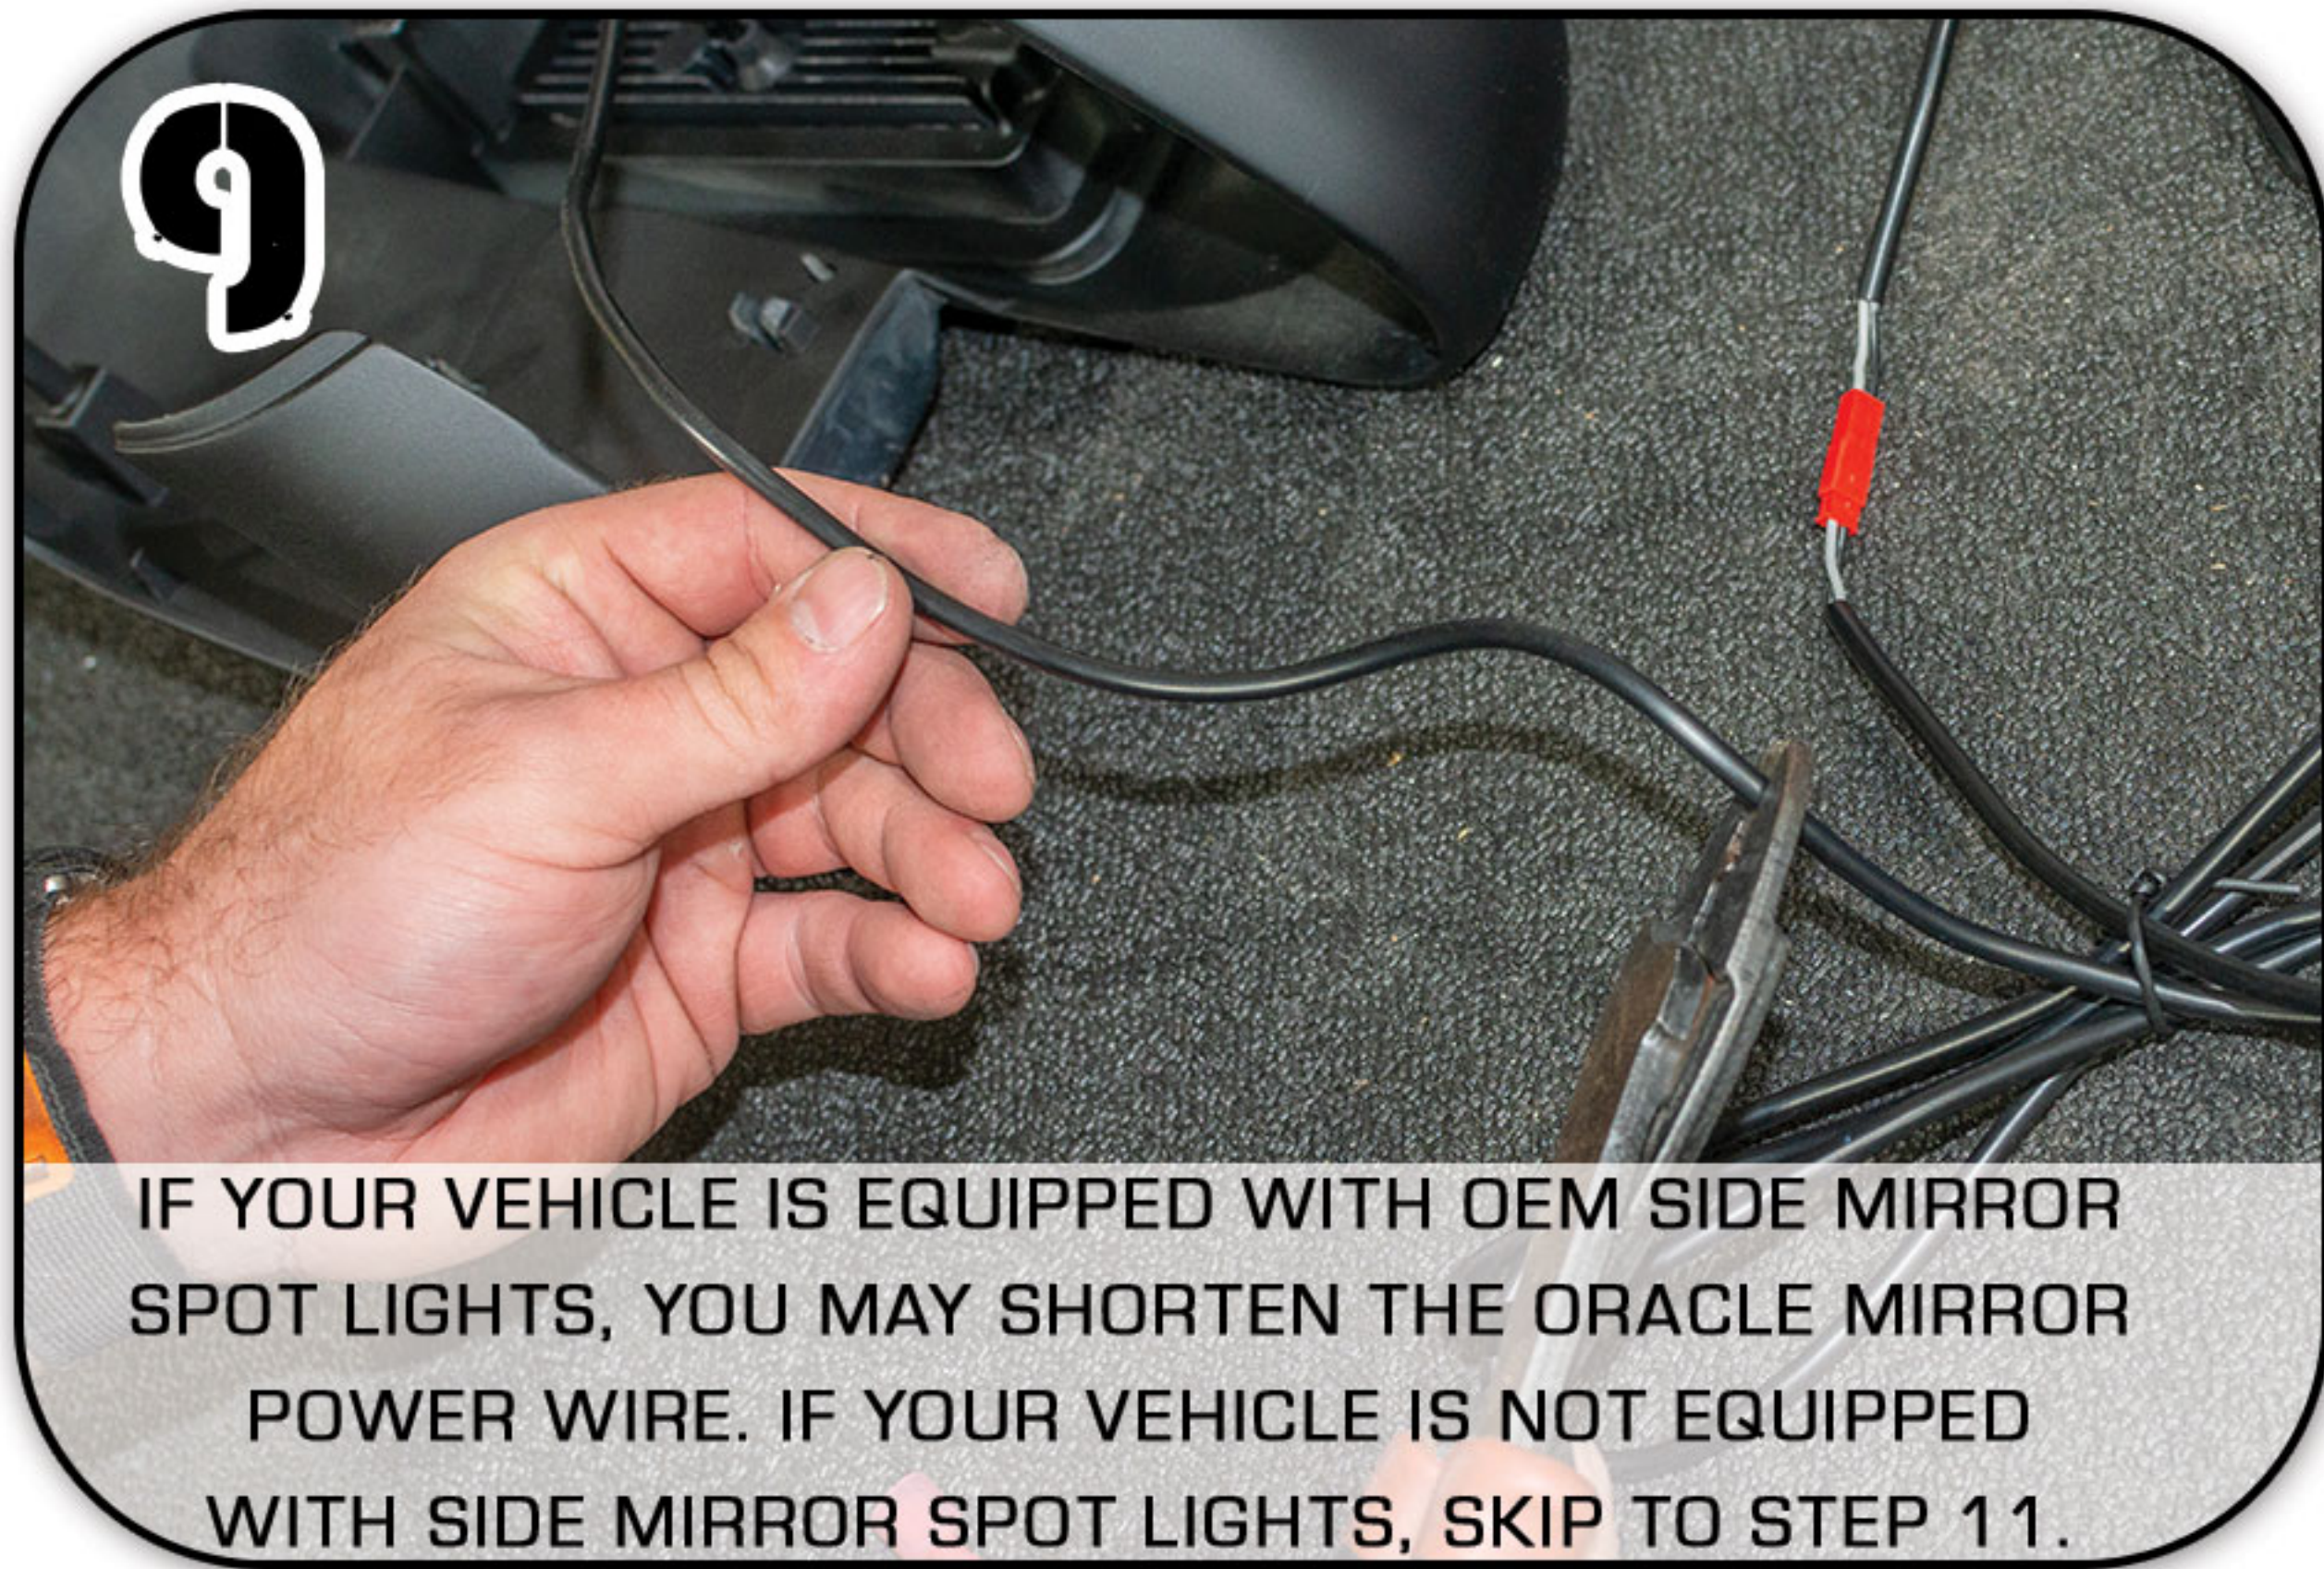


**9**  
IF YOUR VEHICLE IS EQUIPPED WITH OEM SIDE MIRROR SPOT LIGHTS, YOU MAY SHORTEN THE ORACLE MIRROR POWER WIRE. IF YOUR VEHICLE IS NOT EQUIPPED WITH SIDE MIRROR SPOT LIGHTS, SKIP TO STEP 11.




**10**  
NEXT YOU WILL T-TAP THE ORACLE MIRROR CAP WIRES TO THE OEM SIDE MIRROR SPOT LIGHT WIRES. (ONLY IF YOUR VEHICLE IS EQUIPPED WITH THEM.)




**11**  
IF YOUR VEHICLE IS NOT EQUIPPED WITH SIDE MIRROR SPOT LIGHTS, YOU WILL NEED TO ROUTE THE POWER WIRE THROUGH THE DOOR. BEGIN BY REMOVING THIS PANEL

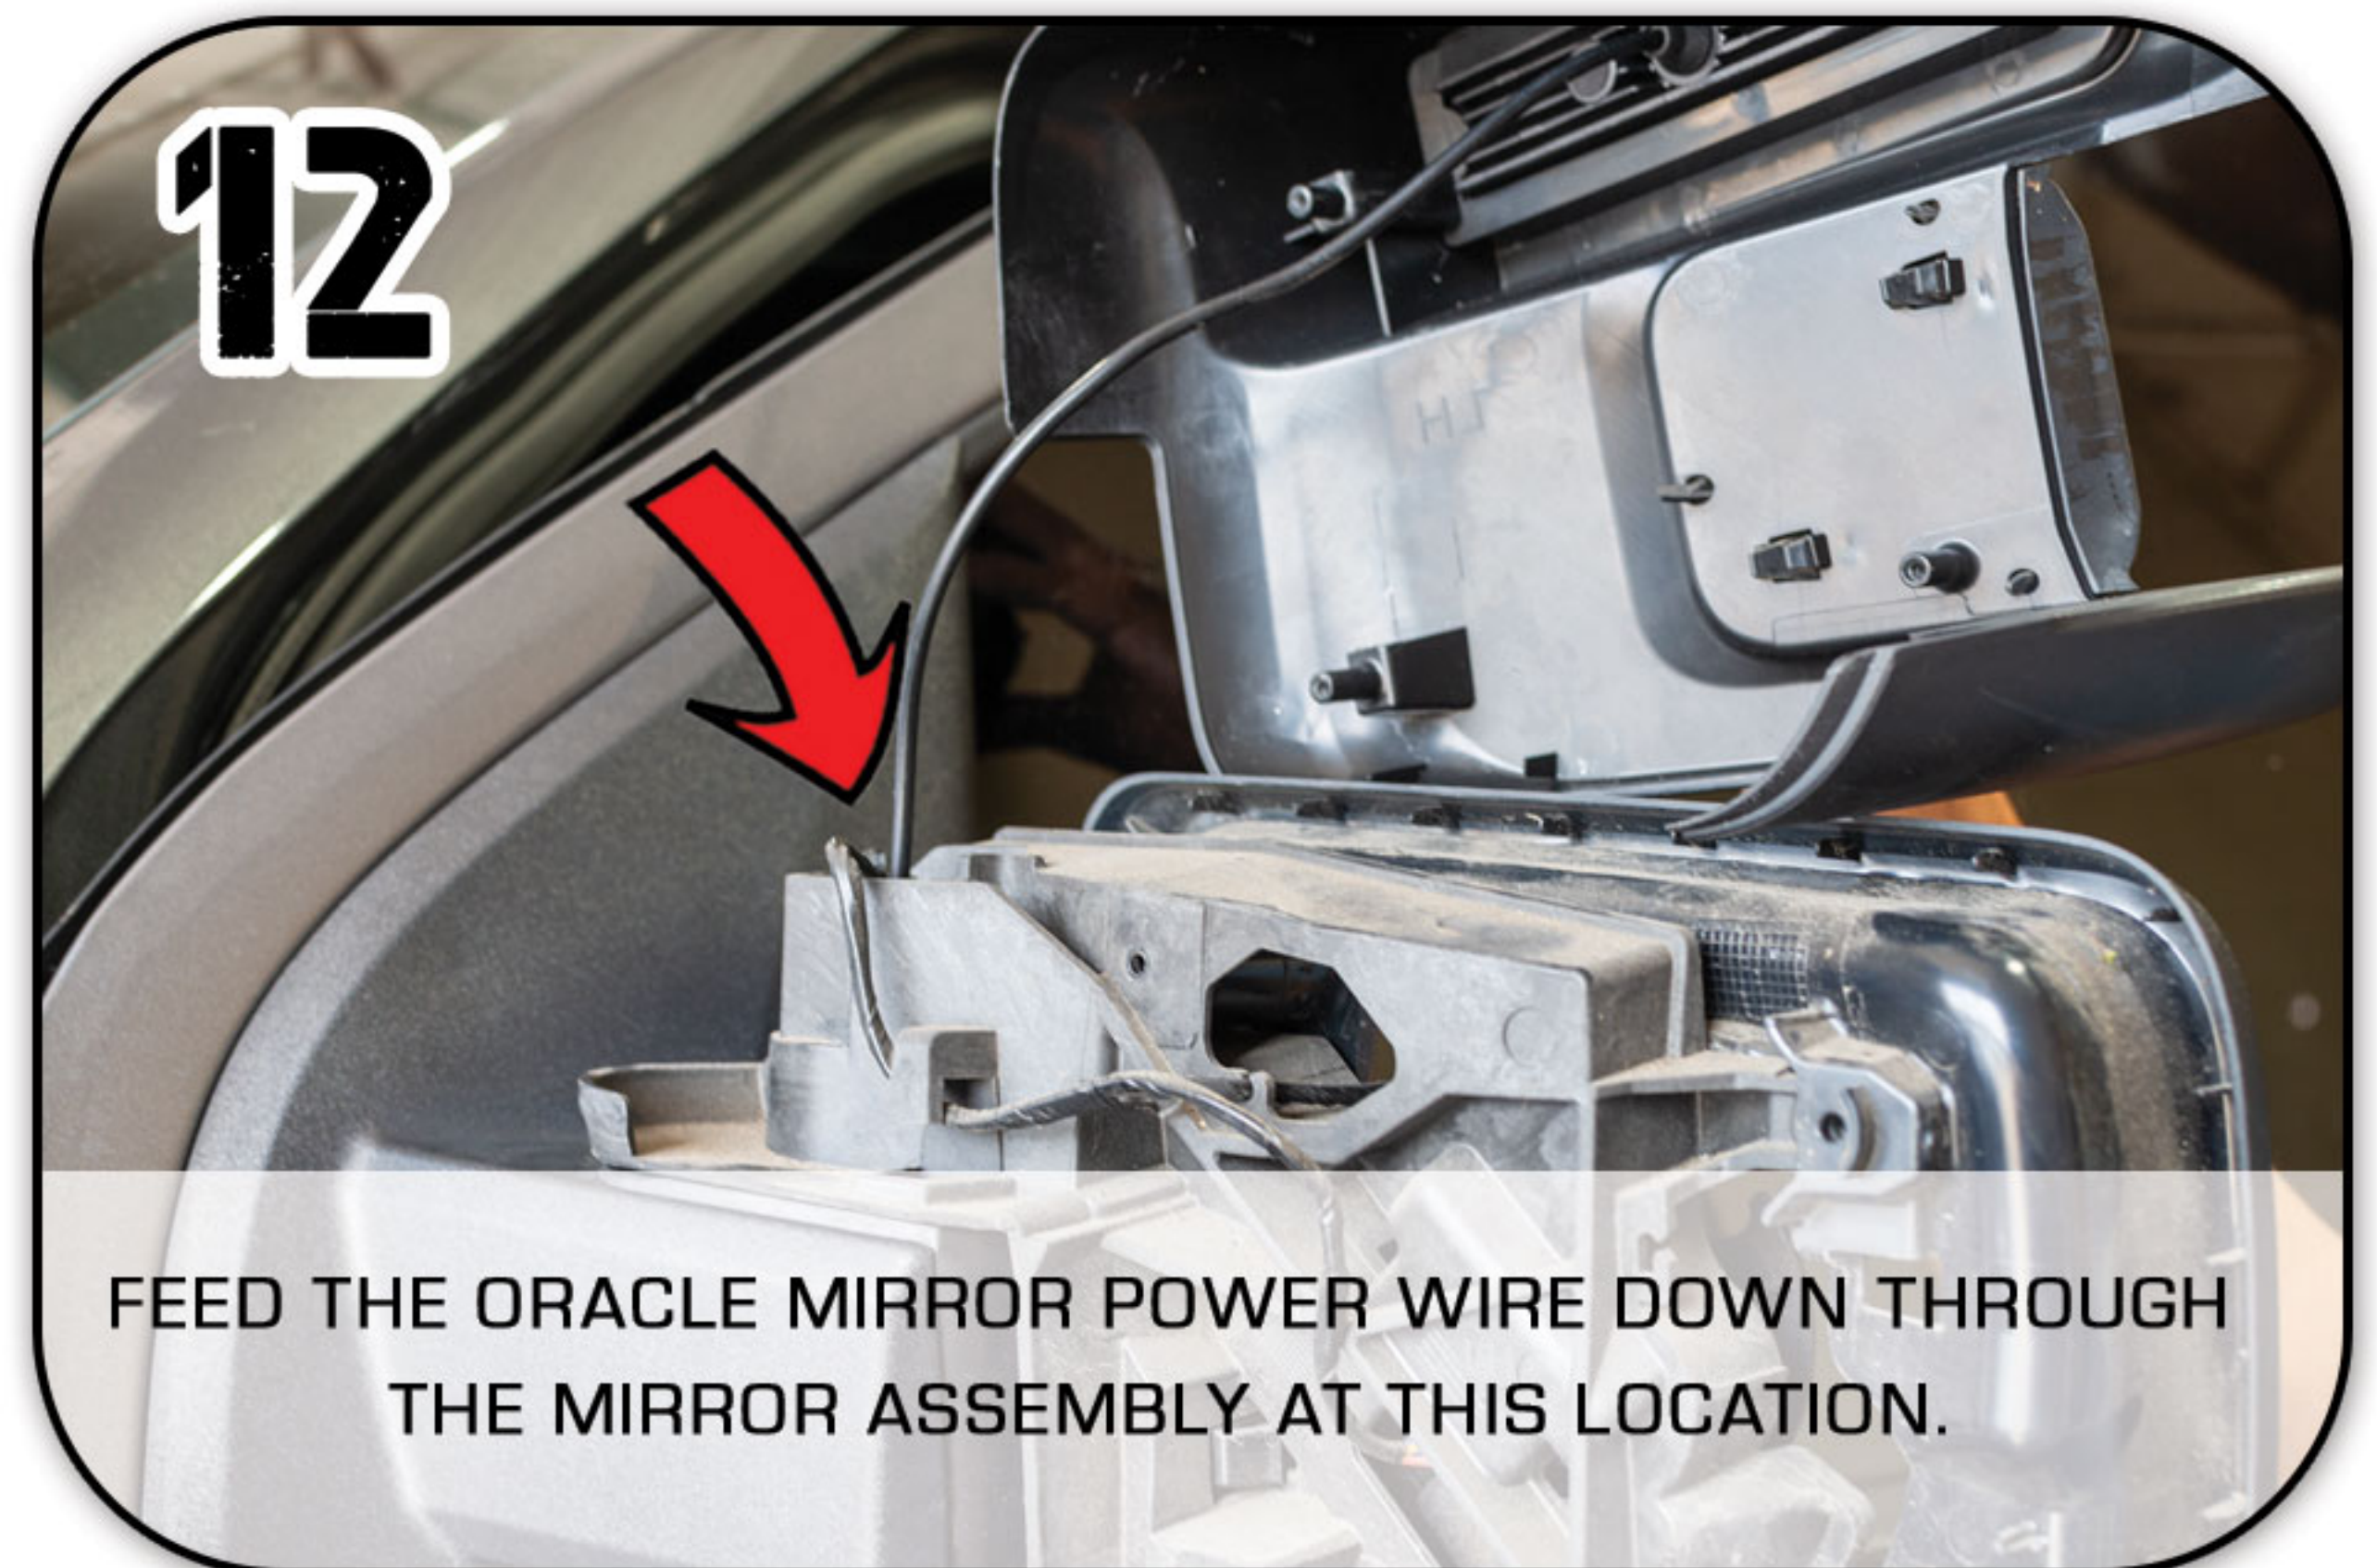

**12**  
FEED THE ORACLE MIRROR POWER WIRE DOWN THROUGH THE MIRROR ASSEMBLY AT THIS LOCATION.

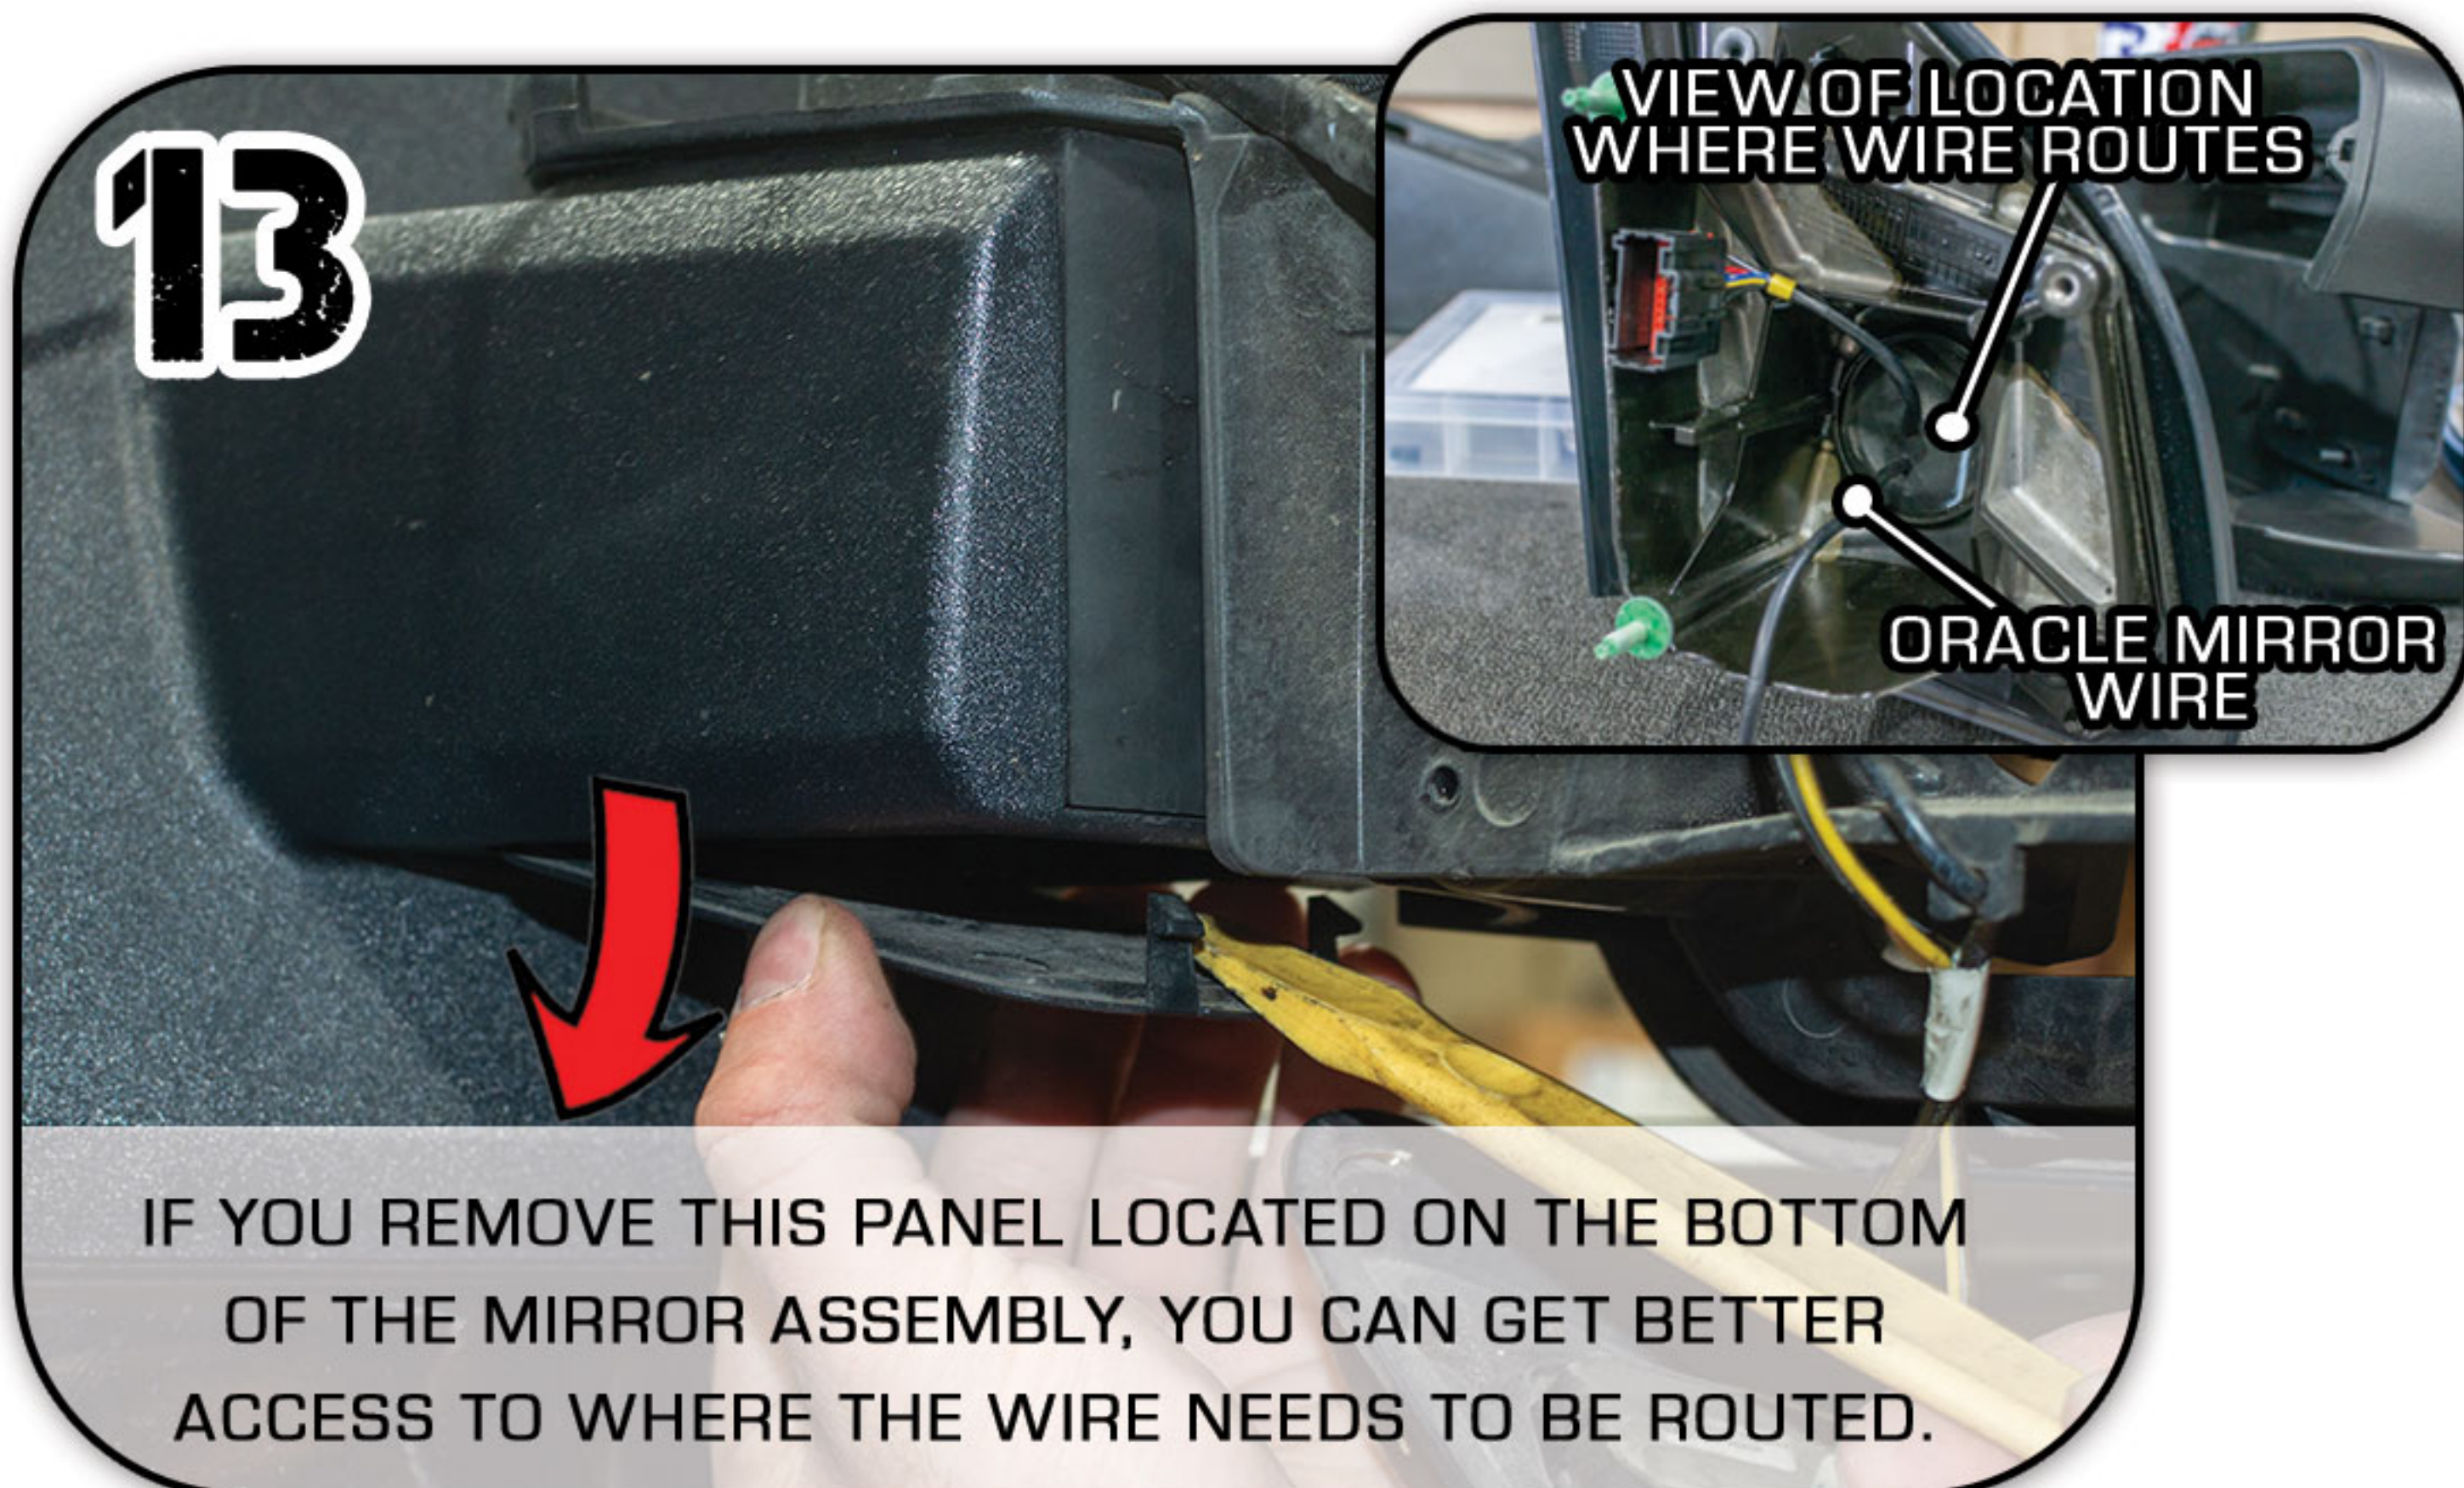

**13**  
IF YOU REMOVE THIS PANEL LOCATED ON THE BOTTOM OF THE MIRROR ASSEMBLY, YOU CAN GET BETTER ACCESS TO WHERE THE WIRE NEEDS TO BE ROUTED.

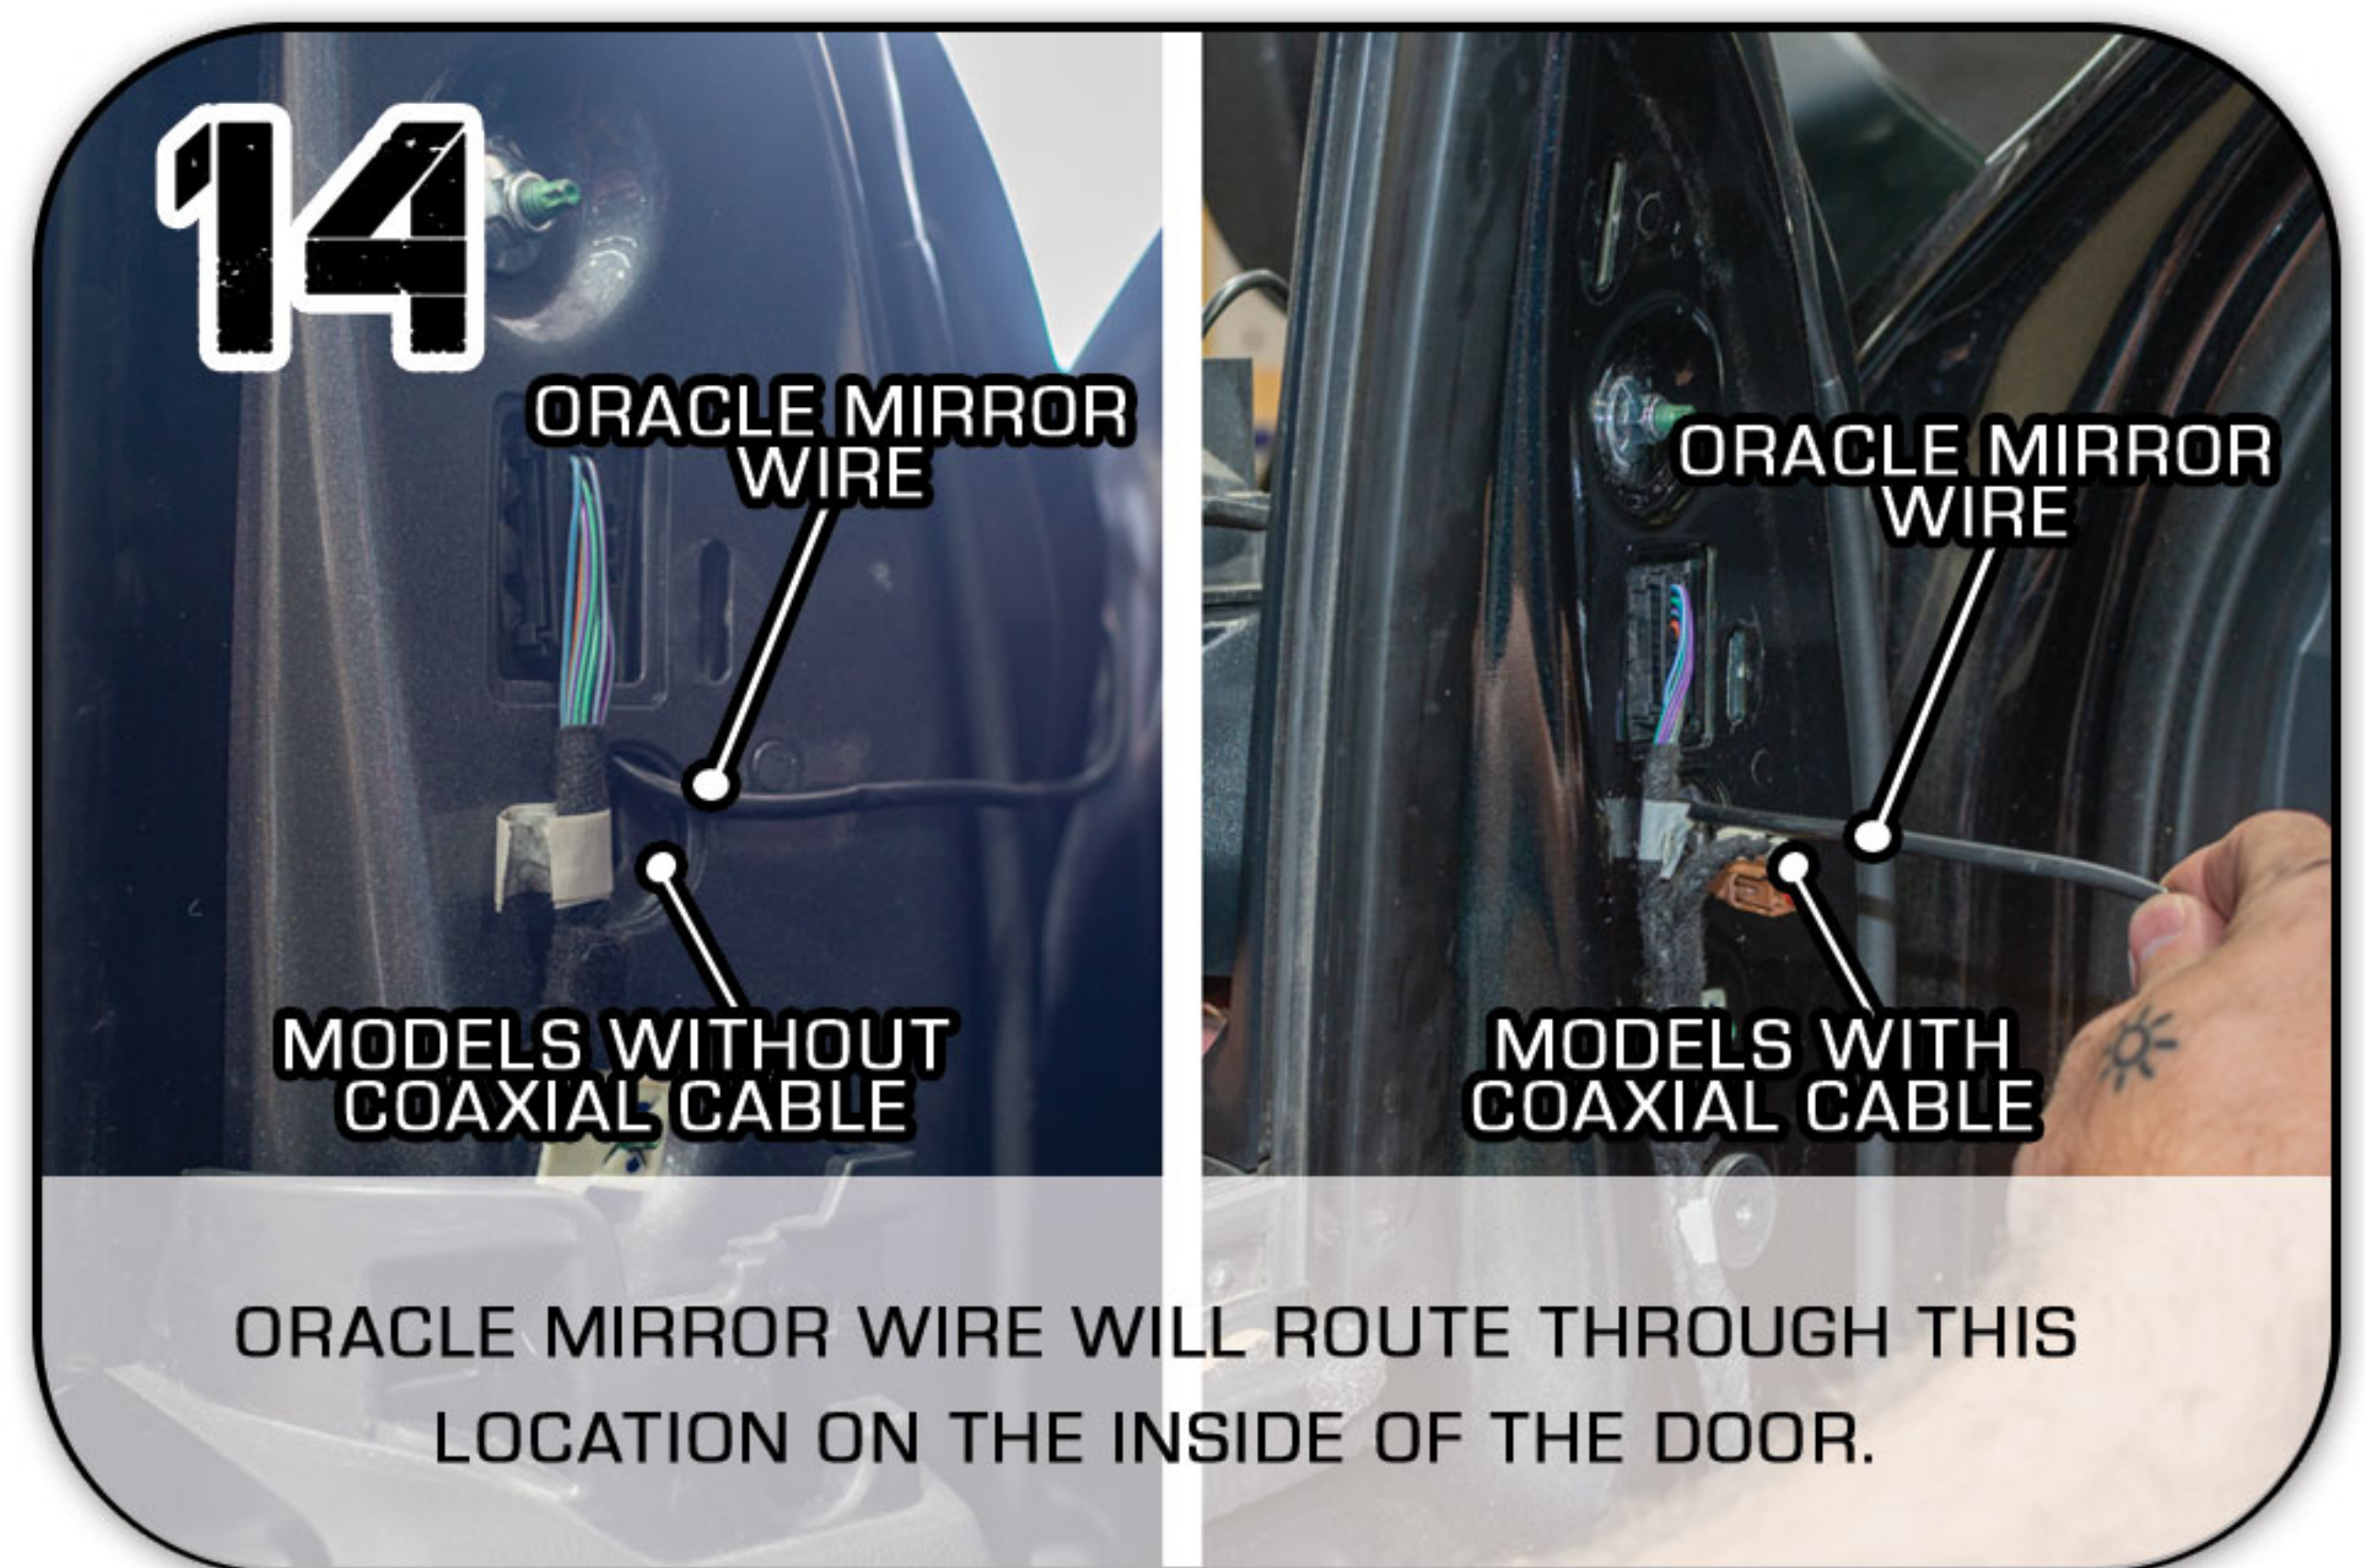

**14**  
ORACLE MIRROR WIRE WILL ROUTE THROUGH THIS LOCATION ON THE INSIDE OF THE DOOR.



**15**  
ATTACH THE ORACLE MIRROR CAP WITH THE (4) T-15 TORX SCREWS. REINSTALL MIRROR GLASS, MAKING SURE ALL CONNECTORS ARE RECONNECTED.



**16**  
FEED THE ORACLE MIRROR INTO THE VEHICLE'S ENGINE BAY THROUGH THIS LOCATION. CONNECT WIRES TO AUX SWITCH OF YOUR CHOICE.



[www.oraclelights.com](http://www.oraclelights.com)

© 2024 ORACLE LIGHTING

4401 Division St.  
Metairie, LA 70002

FOR ADDITIONAL TECHNICAL SUPPORT PLEASE CALL US 1(800)407-5776