



OP-916-SSLT QUICK CLEAN LIFT TOP STAINLESS STEEL FLOOR SCALE

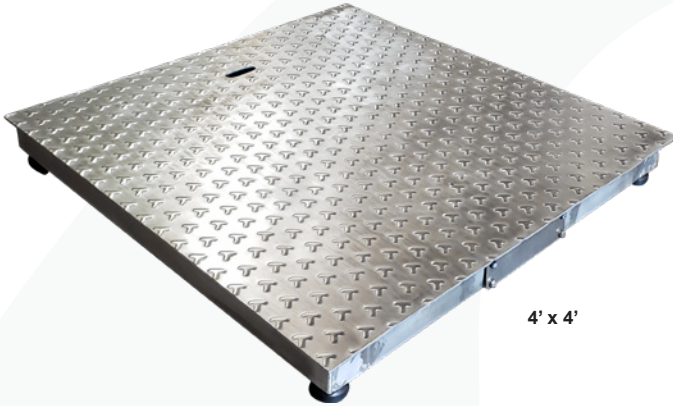

4' x 4'

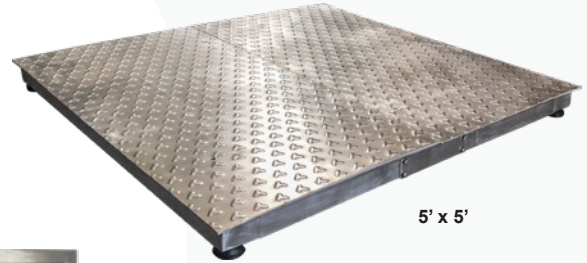

5' x 5'



LCD
OP-900-SL Stainless Steel
Washdown Indicator

FEATURES


- Hydraulic manual top lifts for easy washdown
- 304 or 316 stainless steel construction with safety diamond tread plate deck
- 4'x4' option has single lift door, 5'x5' option has double lift doors
- NEMA 4X watertight stainless steel junction box
- Side access to junction box to minimize water access
- Four NTEP certified laser welded and sealed IP68 stainless steel load cells
- Load cell capacity is 2X the scale capacity for a 200% overload protection
- Four adjustable stainless steel ball capture support feet
- 20' heavy duty stainless steel shielded cable
- Factory pre-calibrated for quick setup

OPTIONS/ACCESSORIES:

- Access ramps
- Pit frames
- Impact Protection
- Portability frames
- Thermal printer
- Stand for indicator
- Large Display
- Data logging software
- Remote junction box
- Wireless option
- Explosion proof option



4' x 4'

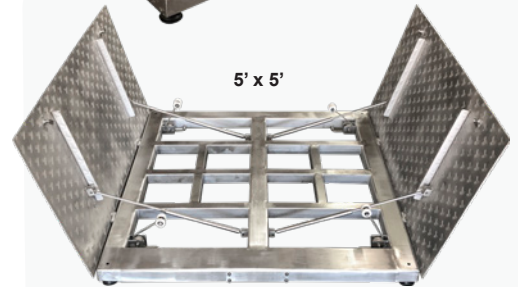

5' x 5'

PART#	PLATFORM SIZE	CAPACITY	NTEP	SHIP WT.
SMOOTH TOP				
OP-916SSLT-3x3-5K	3' x 3' x 4.2" H	5,000 lb x 1 lb / 2,500 kg	Yes	320 lbs
OP-916SSLT-4x4-5K	4' x 4' x 4.2" H	5,000 lb x 1 lb / 2,500 kg	Yes	390 lbs
OP-916SSLT-4x4-10K	4' x 4' x 4.2" H	10,000 lb x 2 lb / 2,500 kg	Yes	440 lbs
OP-916SSLT-5x5-5K	5' x 5' x 4.2" H	5,000 lb x 1 lb / 2,500 kg	Yes	490 lbs
OP-916SSLT-5x5-10K	5' x 5' x 4.2" H	10,000 lb x 2 lb / 2,500 kg	Yes	560 lbs
DIAMOND PLATE TOP				
OP-916SSLTDP-3x3-5K	3' x 3' x 4.2" H	5,000 lb x 1 lb / 2,500 kg	Yes	320 lbs
OP-916SSLTDP-4x4-5K	4' x 4' x 4.2" H	5,000 lb x 1 lb / 2,500 kg	Yes	390 lbs
OP-916SSLTDP-4x4-10K	4' x 4' x 4.2" H	10,000 lb x 2 lb / 2,500 kg	Yes	440 lbs
OP-916SSLTDP-5x5-5K	5' x 5' x 4.2" H	5,000 lb x 1 lb / 2,500 kg	Yes	490 lbs
OP-916SSLTDP-5x5-10K	5' x 5' x 4.2" H	10,000 lb x 2 lb / 2,500 kg	Yes	560 lbs

CUSTOM SIZES AVAILABLE

1/2 16/6



5-BRIDGE DULLES

