


SL-818-SSW Single-Ended Beam, Stainless Steel | IP68

NTEP 1:5,000 Class III Multiple Cell

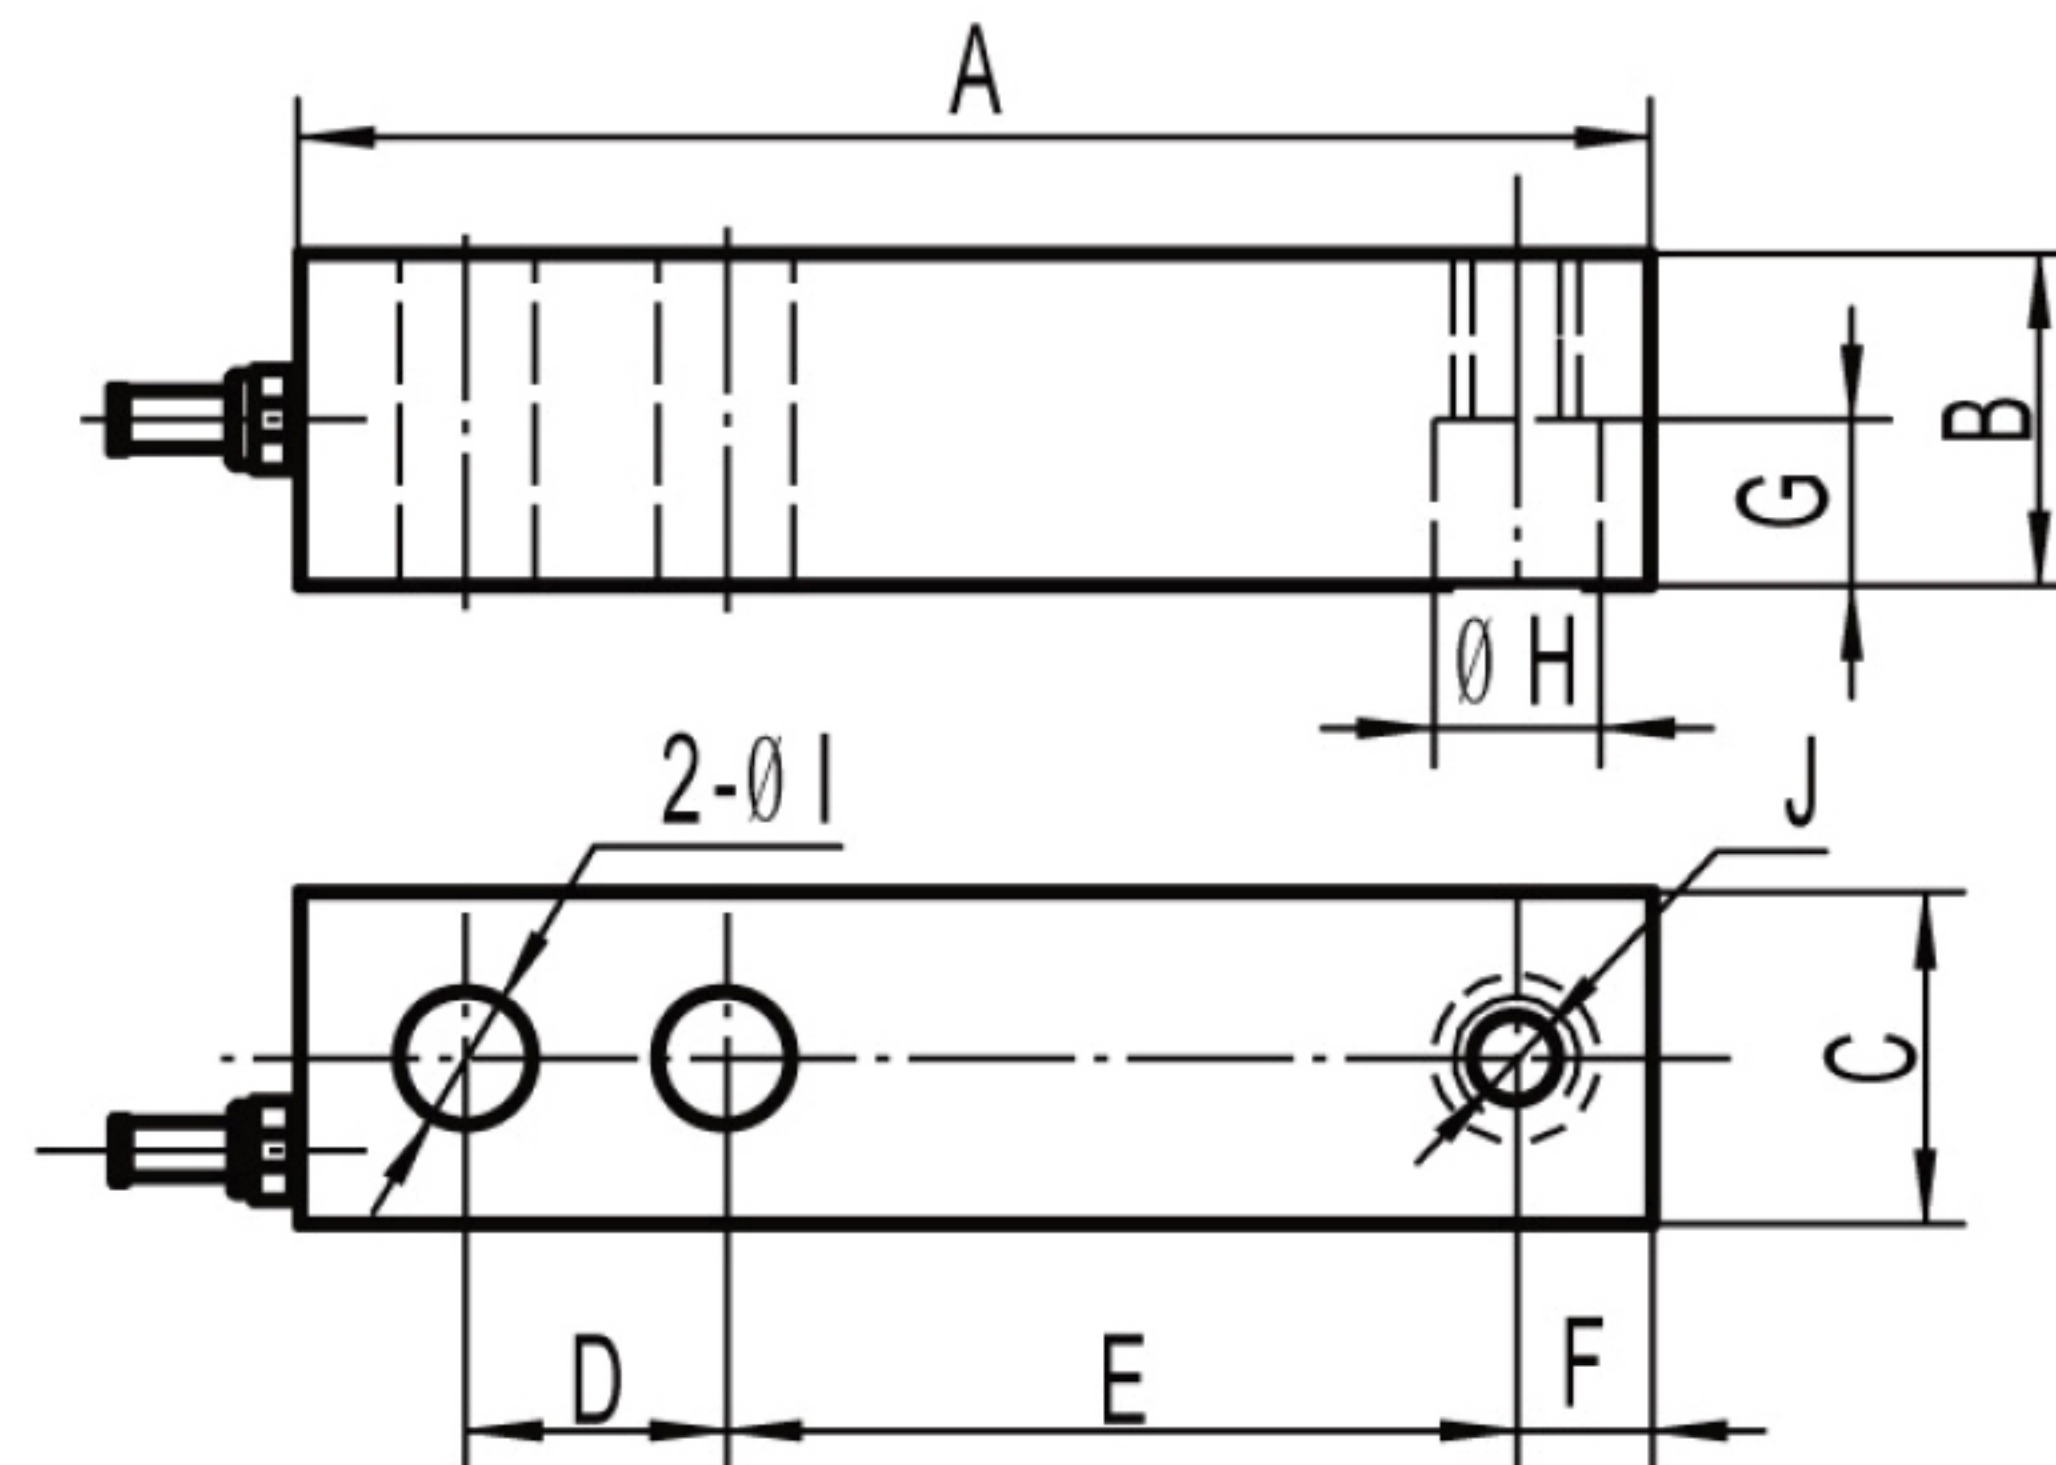

SPECIFICATIONS		
PART#	CAPACITY	ENVELOPE
SL-818-SSW-0.5	500 lbs	Small
SL-818-SSW-0.75	750 lbs	Small
SL-818-SSW-1	1,000 lbs	Small
SL-818-SSW-1.5	1,500 lbs	Small
SL-818-SSW-2	2,000 lbs	Small
SL-818-SSW-2.5	2,500 lbs	Small
SL-818-SSW-4	4,000 lbs	Small
SL-818LE-SSW-5	5,000 lbs	Large
SL-818-SSW-10	10,000 lbs	Large
SL-818-SSW-15	15,000 lbs	Large
SL-818-SSW-20	20,000 lbs	Large

RATED CAPACITY	DIMENSIONS									
	A	B	C	D	E	F	G	H	I	J
lb/inches										
500-5K lbs	5.12	1.25	1.25	1.00	3.00	0.50	0.62	0.53	0.53	1/2-20UNF
5K LE-10K lbs	6.75	1.50	1.50	1.50	3.75	0.75	0.75	0.78	0.78	3/4-6UNF
15K-20K lbs	8.88	2.00	2.00	2.00	4.88	1.00	1.00	1.03	1.03	1-14UNF
kg/mm										
45-2,268 kg	130.05	31.75	31.75	25.40	76.20	12.70	15.75	13.46	13.46	1/2-20UNF
2,268 LE-4,536 kg	171.45	38.10	38.10	38.10	95.25	19.05	19.05	19.81	19.81	3/4-16UNF
6,804-9,072 kg	225.55	50.80	50.80	50.80	123.95	25.40	25.40	26.16	26.16	1-14UNF
kg/mm										
50-2,500 kg	130.05	31.75	31.75	25.40	76.20	12.70	15.75	13.46	13.46	M12
3,000-5,000 kg	171.45	38.10	38.10	38.10	95.25	19.05	19.05	19.81	19.81	M20
7,000-10,000 kg	225.55	50.80	50.80	50.80	123.95	25.40	25.40	26.16	26.16	M24X2
lb/inches										
110-5.5K lbs	5.12	1.25	1.25	1.00	3.00	0.50	0.62	0.53	0.53	M12
6.6K-11K lbs	6.75	1.50	1.50	1.50	3.75	0.75	0.75	0.78	0.78	M20
15.4K-22K lbs	8.88	2.00	2.00	2.00	4.88	1.00	1.00	1.03	1.03	M24X2

Note: LE - large envelope

SPECIFICATIONS

Rated Capacity:

lb: 500/750/1K/1.5K/2K/2.5K
4K/5K/10K/15K/20K
kg: 300/500/1,000/1,500/2,000/
2,500/3,000/5,000/7,000/10,000

Rated Output:

3.0mV/V

Non-Linearity:

±0.03% F.S.

Hysteresis:

±0.03% F.S.

Repeatability:

±0.02% F.S.

Creep (30 minutes):

±0.02% F.S.

Temperature Effect on Span:

±0.0015% F.S./C

Temperature Effect on Zero:

±0.0027% F.S./C

Zero Balance:

±1.00% F.S.

Insulation Resistance:

>5000 MEGOHMS

Input Impedance:

385±20Ω

Output Impedance:

350±3Ω

Safe Overload:

150% F.S

Destructive Load:

300% F.S

Excitation Recommended:

10-15V AC/DC

Material/Finish:

Stainless Steel

Operation Temperature:

-10°C - + 40°C (14°F - 104°F)

Cable Length:

Standard Cable - 20ft/6m

Load Cell Wiring:

Red..... +Excitation
Black..... -Excitation
Green..... +Signal
White..... -Signal

INTERCHANGEABLE PRODUCTS

Artech: **2230310**

Revere: **9123**

Celtron: **SQB SS**

HBM: **H35 RLWS**

Rice Lake: **RL35023S**

Rice Lake: **RLH35**

Transcell: **SBS**

Coti Global Sensors: **CG-23-SSW-03**

Transcell: **SBS**

Fairbanks: **3-54786-1**

Sensortronics: **65083S**

Mettler-Toledo: **TB601019-008-500 lb**

Mettler-Toledo: **TB601016-020-1K lb**

Mettler-Toledo: **TB601016-020-2.5K lb**

Mettler-Toledo: **TB601017-020-4K lb**

Mettler-Toledo: **TB601018-020-5L lb**

WEIGHING MODULES AVAILABLE

SL-818-TM-SSW