


WIRELESS CONTROLLER GUIDE for ASL500

Follow the steps below to insure proper installation/operation of your Wireless Controller.


NOTE: The ASL500 must have power to complete this process.

Step 1. Sync the Wireless Controller and RF transmitter. Hold both buttons on the remote to get a solid yellow light on the transmitter. This confirms power and RF connectivity.

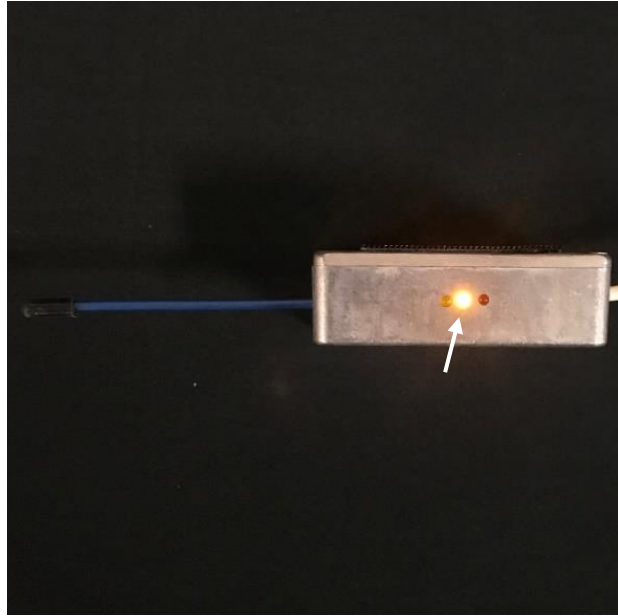

Step 2. Mount the RF transmitter under the cover with the supplied Velcro.

- The antenna must be horizontal (not vertical).
- Antenna should point toward the center of the room.
- **NOTE: Every jobsite is different. If you have connectivity issues, feel free to try other antenna positions.**
- The optimal position under the cover is as follows.

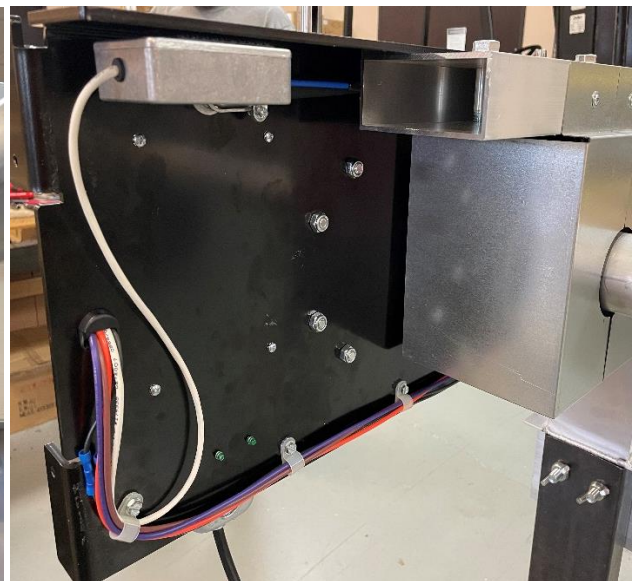

Step 3. Unlock your Wireless Controller. The handheld remote is equipped with a child safety lock that will time out after 30 seconds of inactivity.

- Press both buttons and wait for steady indicator light (flashing light indicates low battery)
- Press DOWN – watch for short flash.
- Press DOWN again – short flash.
- Press UP – steady light = unlocked



Step 4. Normal Operation

Perform the following for operation:

1. Unlock your wireless controller (see above).
2. Press and hold the down button to run your storage lift down to the FLOOR POSITION.
3. Release the down button once the cart touches the floor. DO NOT allow cable counterweights to touch the floor. Load the items that you want to transport to the attic inside the cart assembly. DO NOT allow any items to hang over the inner frame of the cart.
4. Press and hold the up button to run your storage lift to the CEILING POSITION, then release.

Safety Warnings:

- Call Aladdin Storage Lift immediately if the storage lift operates down while holding the UP button or up while holding the DOWN button. A safety hazard can occur and cause the ASL500 to fall, which could cause death, personal injury and/or property damage.
- Never remove or tamper with the cable safety device or shut-off system. Removing or tampering with the cable safety device could cause the cable to reverse wrap on the drive shaft.
- Never install or operate an Aladdin Storage Lift that has a frayed, kinked, or otherwise damaged cable.
- Avoiding any of these could cause the ASL500 to fall, which could cause death, personal injury, and/or property damage.