


# KODAK Solar Battery Storage NL2.5

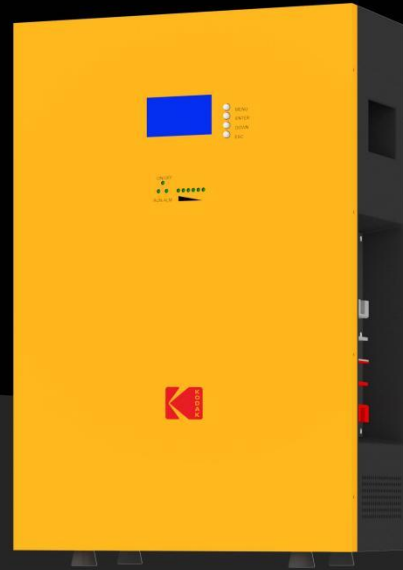

## Wall/Floor Mounted Battery Storage

### Features

- Easy for installation and maintenance with software BMS monitoring
- Can be easily stand on the floor or hang on the wall
- Support high current charging / discharging
- Support RS485,RS232 and CAN communications
- Performance rate of 1C
- Compatible with most leading brands of inverters
- 6000+ cycle life (see technical data below)
- LCD display
- Compact and slimline design
- Support up to 15 packs in parallel
- 5 years warranty extendable to 10 years
- Compatible with most inverters and chargers

### Models:

KODAK Solar Battery Storage NL2.5



# Technical Parameters

Model	NL2.5
Nominal Voltage	25.6V
Nominal Capacity	100Ah
Nominal Battery Energy	2.56KWh
Charging cut-off voltage	29.2V
Discharging cut-off voltage	22.4V
Max.Continuous Charging Current	100A(Recommend 50A )
Max.continuous Discharge Current	100A
Max C Rating	1C
Parallel Capability	Up to 15 units
Communication	RS485/RS232/CAN
Cycle Life	> 6000 cycles @80%DOD&1C
Warranty	5 years
Certification& Safety standard	CE/UN38.3/MSDS
Operating Temperature	Charging:0 to +50°C , Discharging:-10 to +50°C
Storage Temperature	-10°C to +55 °C
Protection	Over-charge/Over-discharge/Over-current/Over-temperature/Short Circuit
Net Weight	24KGS
Dimension	550*340*155mm



For further information visit [www.bluemountainpv.com](http://www.bluemountainpv.com)

©2024 Blue Mountain Energy LTD, The Kodak trademark, logo and trade dress are used under license from Kodak

Blue Mountain Energy Ltd. Crown House, 27 Old Gloucester Street, London WC 1N 3AX

Made in China