

# Diabolical Inc JL Locker Installation Instructions:

## Jeep Wrangler JL – 2019 to Current


### Overview

This installation can be accomplished by one person with basic tools and limited mechanical experience.

### Required Tools:

Tool	Size	Alternate Tools	Size
Sockets (SAE) 3/8" Drive	7/16	Open/Box End Wrench	7/16
Ratchet	3/8" Drive		
Extension	3/8" Drive 6"		
Scissors		Utility Knife/Exacto/Razor	
Torx Key Bits/Drivers	T-30, T-40, T-45		

We suggest you use a few folding tables covered in towels or cloth (to avoid scratching) layout all your parts and pieces

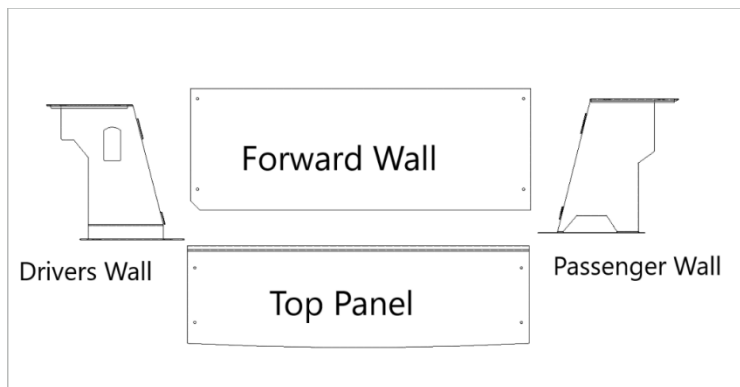

### Install:

Remove the 4 D-Ring bolts in the floor of your JL Floor by removing the plastic cover lid and using a T-40 Torx.

Locate the driver side wall (With the cutout). Place some 2 inch foam and place it on the outside edge of the top and cut to fit



Take 2 of the large bolts and washers and set the driver side wall in place and tighten the bolts to 80%

Locate the passengers side wall and repeat the foam process on the passengers side, Repeat the bolt procedure with the bolts and washers on the passengers side.



Locate the forward wall piece and slide the wall panel into the slots.



Use 4 spin knobs and put them on the exposed pem studs and tighten them to finger tight.

Locate the top panel and place it on top of the system with the bent edge facing towards the front of the jeep. Drop the pem studs into the holes in the side walls, Grab 4 more spin knobs and put them loosely on the exposed studs underneath.

Place the edge seal along the rear edge of the locker top panel.

Adjustments:

Slowly close the tailgate and ensure there is a slight gap between the tailgate and top panel. Adjust as needed.

Tighten the 2 rear floor bolts and remove both the top and wall and tighten the forward floor bolts. Replace the wall and top and installation is complete.