


AER-FLO®

4455 18th Street East, Bradenton, FL 34203
800.823.7356 • www.aerflo.com

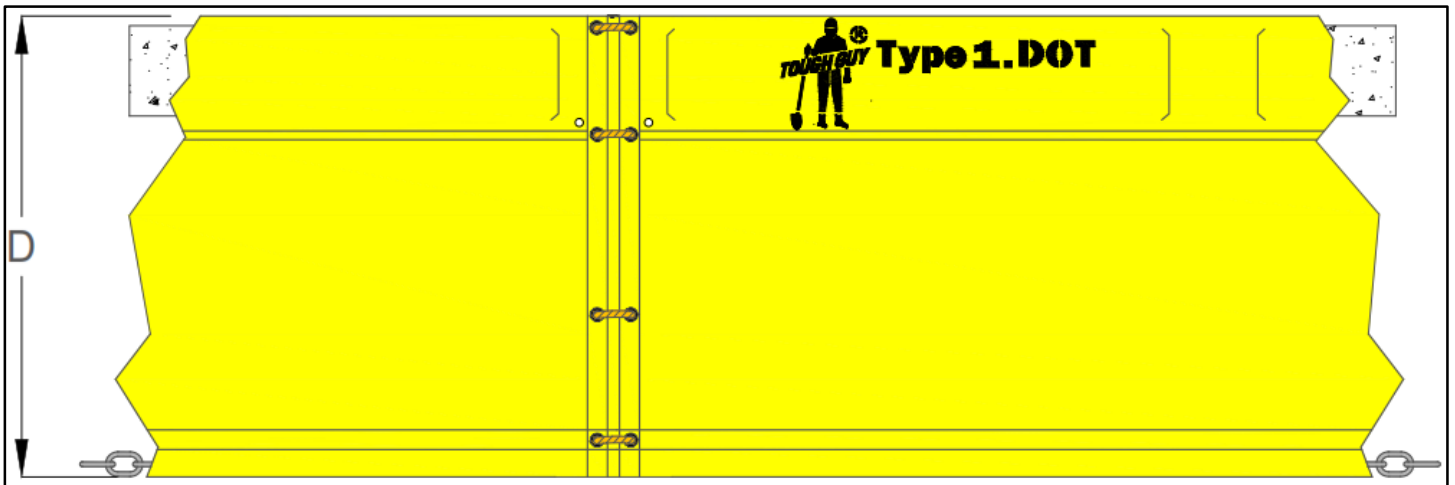

Tough-Guy® Floating Turbidity Barrier Type 1.DOT

Specifications

Fabric: 18oz. nominal PVC coated polyester

Base Fabric (100% Polyester)

Weight (FS-191-5041)

Tensile Strength, Grab (ASTM 4632)

Tear Strength, Tongue (ASTM 2261)

Elongation (ASTM 4632)

Adhesion Strength (ASTM 751)

Abrasion Resistance (ASTM 4833)

Hydrostatic Resistance (ASTM 751)

UV Resistance (Weather-O-Meter)

Cold Crack Resistance (ASTM 2136)

High Temperature Resistance (ASTM 2136)

Flame Resistance

Special Treatment(s)

1000D x 1000D / 9 x 9

18oz./yard²

325 lbs x 310 lbs

55 lbs x 45 lbs

21% x 21%

17 x 17 lbs/inch

325 cycles

At least 660 lbs/inch²

Not excessive fading after 1000 HRS

-40° F

180° F (Does not Block)

Pass

Anti Mildew

All seam heat sealed

5/8" diameter poly rope reinforced vertical edges

#4 brass grommets

1/4" galvanized chain ballast

EPS flotation foam: 6" x 6", 13.5 lb./ft. buoyancy in fresh water and 14.4 lb./ft. buoyancy in saltwater

MADE IN THE USA

AER-FLO®

Manufactured by Aer-Flo, Inc.
Bradenton, FL

Sold by Authorized Distributors

© 2015 Aer.Flo, Inc.