


# AER-FLO®

4455 18<sup>th</sup> Street East, Bradenton, FL 34203  
800.823.7356 • www.aerflo.com

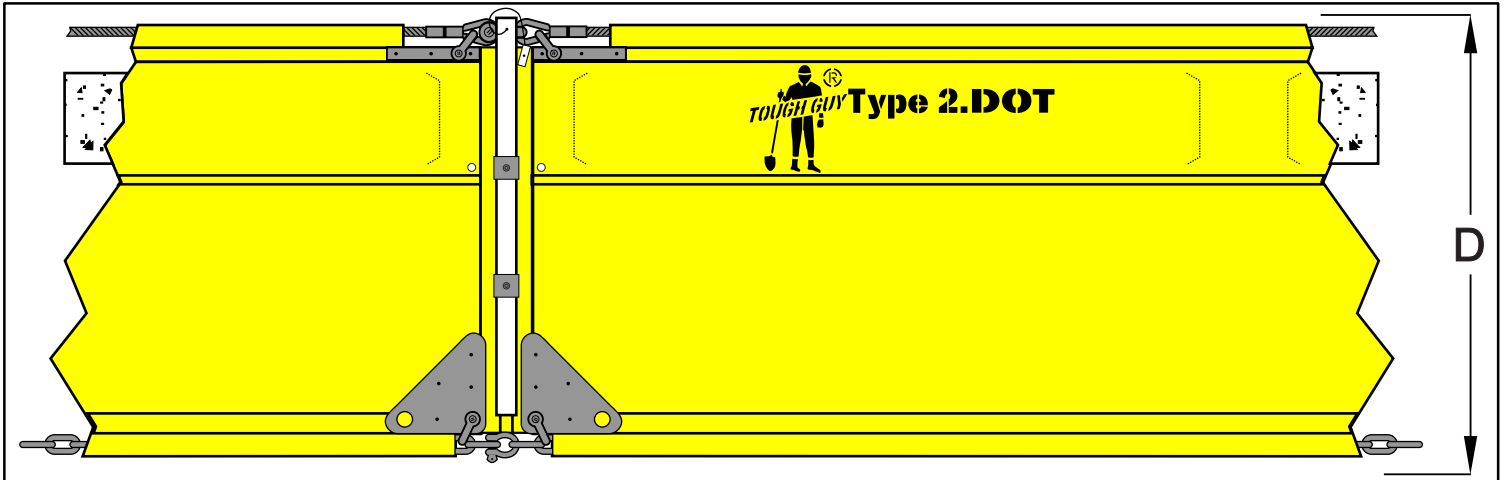

## **Tough-Guy® Floating Turbidity Barrier Type 2.DOT**

### **Specifications (ST: 6/12)**

**Fabric – 20 mil, 18 oz. nominal PVC covered polyester**

**All seams heat sealed**

**5/8 inch poly rope reinforced vertical edges**

**#5 brass grommets**

**5/16 in. galvanized steel 7 x 19 load cable with PVC coating in top, 10,000 lb. break strength**

**5/16 in. galvanized chain ballast in bottom**

**Aluminum stress plates at cable and chain termination**

**EPS flotation, (8 in. x 8 in. standard), 26.7 lb./ft. buoyancy in fresh water, 28.4 lb./ft in saltwater.**

**PVC Slotted Tube End Connectors optional**

MADE IN THE USA

## AER-FLO®

Manufactured by Aer-Flo, Inc.  
Bradenton, FL

Sold by Authorized Distributors

© 2015 Aer-Flo, Inc.