



October 19, 2010

## **TELECOM SOLUTIONS FOR THE 21ST CENTURY**

## Surface or Pedestal Mount Viking Products While Maintaining Weather and Vandal Resistance

The VE-3x5, VE-5x5, VE-6x7 and VE-5x10 add vandal and weather resistance, as well as versatility to many Viking products. The VE-Series backboxes are available in black fine texture powder painted steel or Marine Grade 316 stainless steel. The weather resistant boxes are designed to be surface mounted to a wall, post, single gang box, or a VE-GNP gooseneck pedestal. *Note: The VE-3x5 is not compatible with the VE-GNP pedestals and is not available in stainless steel.* 

The VE-3x5 is designed to be used with the E-40-EWP or E-50-EWP Series entry phones. The VE-5x5 is designed to be used with the E-10A-EWP, E-30-EWP, E-30-PT-EWP, E-60-EWP, E-65-EWP, E-70-EWP, E-

vith 1709 the used and resis SS dup-7 Pictor SS Ss are The are Ss Ss are The end **75-EWP** entry phones, the **E-1600-20A-EWP** and **E-1600-30A-EWP** emergency phones, as well as the **W-1000-EWP** and **W-3000-EWP** handsfree doorboxes. The **VE-6x7** is

designed to be used with the K-1700-3-EWP and K-1705-EWP entry phones and the VE-5x10 is designed to be used with the K-1900-7-EWP and the K-1900-8-EWP vandal resistant phones.

The VE-GNP gooseneck pedestals are designed to be used with the VE-5x5, VE-6x7 and VE-5x10 backboxes and are ideal for drive up communications. *Note:* 

The VE-3x5 is not compatible with the VE-GNP

VE-3x5 VE-5x5 VE-6x7 VE-5x10-PNL VE-5x5-SS VE-5x5-PNL Ess and VE-5x5-PNL-SS Note:

VE-5x10

VE-6x7-PNL-SS VE-5x10-PNL-SS

VE-5x10-SS

Caution: Handsfree phones are not suit-<br/>able for noisy applications (see page 2).thColumnColumn

pedestals. The VE-PNL's are VE-Series backboxes with a blank aluminum panel. The user can customize the clear-coated aluminum panel to mount an HID-1 card reader, HID-2 keypad or switch. The kits come complete with box, gasket, panel and screws. Model numbers that end with "SS" are stainless steel version.

# Features -

- · Surface mounts to a wall, post or single gang box
- VE-5x5 mounts to a single or double gang box
- VE-5x5, VE-6x7 and VE-5x10 mount to the VE-GNP gooseneck pedestals
- · VE-PNL's blank aluminum panels are easy to modify
- · Adds weather and vandal resistance
- · Heavy duty, black powder painted steel or stainless steel

Model	Shipping Weight (each)	
VE-3x5	0.45 kg (1 lb)	
VE-5x5 / SS / PNL	0.9 kg (2 lbs)	
VE-6x7 / SS / PNL	0.9 kg (2 lbs)	
VE-5x10 / SS / PNL	1.36 kg (3 lbs)	
VE-GNP	8.2 kg (18 lbs)	
VE-GNP-SS	4.5 kg (10 lbs)	
VE-GNP-2	13.6 kg (30 lbs)	
VE-GNP-IG	10.2 kg (22.5 lbs)	

## Phone...715.386.8861 http://www.vikingelectronics.com

# **Applications**

• The VE-Series Surface Mount Boxes are designed to surface mount the following products:

Model	DOD#	VE Model
E-10A-EWP	210	VE-5x5 / SS
E-30-EWP	212	VE-5x5 / SS
E-30-PT-EWP	214	VE-5x5 / SS
E-35-EWP	178	VE-5x5 / SS
E-40-EWP Series	187	VE-3x5
E-50-EWP Series	191	VE-3x5
E-60-EWP Series	206	VE-5x5 / SS
E-65-EWP Series	203	VE-5x5 / SS
E-70-EWP Series	207	VE-5x5 / SS
E-75-EWP Series	208	VE-5x5 / SS
E-1600-20A-EWP	215	VE-5x5 / SS
E-1600-30A-EWP	215	VE-5x5 / SS
K-1700-3-EWP	157	VE-6x7 / SS
K-1705-EWP	159	VE-6x7 / SS
K-1900-7-EWP	360	VE-5x10 / SS
K-1900-8-EWP	362	VE-5x10 / SS
W-1000-EWP	170	VE-5x5 / SS
W-3000-EWP	180	VE-5x5 / SS
W-3005-EWP	181	VE-5x5 / SS

#### IF YOU HAVE A PROBLEM WITH A VIKING PRODUCT PLEASE CONTACT: VIKING TECHNICAL SUPPORT AT (715) 386-8666

Our Technical Support Department is available for assistance Monday 8am - 4pm and Tuesday to Friday 8am - 5pm central standard time. So that we can give you better service, before you call please:

- 1. Know the model number, the serial number and what software version you have (see serial label).
- 2. Have your Technical Practice in front of you.
- 3. It is best if you are on site.

#### **RETURNING PRODUCT FOR REPAIR**

#### The following procedure is for equipment that needs repair:

- 1. Customer must contact Viking's Technical Support Department at 715-386-8666 to obtain a Return Authorization (RA) number. The customer MUST have a complete description of the problem, with all pertinent information regarding the defect, such as options set, conditions, symptoms, methods to duplicate problem, frequency of failure, etc.
- Packing: Return equipment in original box or in proper packing so that damage will not occur while in transit. Static sensitive equipment such as a circuit board should be in an anti-static bag, sandwiched between foam and individually boxed. All equipment should be wrapped to avoid packing material lodging in or sticking to the equipment. Include ALL parts of the equipment. C.O.D. or freight collect shipments cannot be accepted. Ship cartons prepaid to: Viking Electronics, 1531 Industrial Street, Hudson, WI 54016
- 3. Return shipping address: Be sure to include your return shipping address inside the box. We cannot ship to a P.O. Box.
- 4. RA number on carton: In large printing, write the R.A. number on the outside of each carton being returned.

#### **RETURNING PRODUCT FOR EXCHANGE**

The following procedure is for equipment that has failed out-of-box (within 10 days of purchase):

- 1. Customer must contact Viking's Technical Support at 715-386-8666 to determine possible causes for the problem. The customer MUST be able to step through recommended tests for diagnosis.
- 2. If the Technical Support Product Specialist determines that the equipment is defective based on the customer's input and troubleshooting, a Return Authorization (R.A.) number will be issued. This number is valid for fourteen (14) calendar days from the date of issue.
- 3. After obtaining the R.A. number, return the approved equipment to <u>your distributor, referencing the R.A. number.</u> Your distributor will then replace the product over the counter at no charge. The distributor will then return the product to Viking using the same R.A. number.
- 4. The distributor will NOT exchange this product without first obtaining the R.A. number from you. If you haven't followed the steps listed in 1, 2 and 3, be aware that you will have to pay a restocking charge.

#### WARRANTY

Viking warrants its products to be free from defects in the workmanship or materials, under normal use and service, for a period of one year from the date of purchase from any authorized Viking distributor or 18 months from the date manufactured, which ever is greater. If at any time during the warranty period, the product is deemed defective or malfunctions, return the product to Viking Electronics, Inc., 1531 Industrial Street, Hudson, WI., 54016. Customer must contact Viking's Technical Support Department at 715-386-8666 to obtain a Return Authorization (R.A.) number.

This warranty does not cover any damage to the product due to lightning, over voltage, under voltage, accident, misuse, abuse, negligence or any damage caused by use of the product by the purchaser or others.

Vikings sole responsibility shall be to repair or replace (at Viking's option) the material within the terms stated above. VIKING SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGE OF ANY KIND INCLUDING INCIDENTAL OR CONSEQUENTIAL DAMAGES RESULTING DIRECTLY OR INDIRECTLY FROM ANY BREACH OF ANY WARRANTY EXPRESSED OR IMPLIED, OR FOR ANY OTHER FAILURE OF THIS PRODUCT. Some states do not allow the exclusion or limitation of incidental or consequential damages, so this limitation may not apply to you.


THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY EXCLUDED BEYOND THE ONE YEAR DURATION OF THIS WARRANTY. Some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you.

# Installation and Specifications-


**Important:** The Viking handsfree phones cannot be used in applications where there is a high level of background noise, such as a diesel truck idling. At these levels, the user will experience "one way talk path" and not be able to hear the person at the distant end. In applications where there is a high level of background noise, the model **K-1900-7-EWP**, **K-1900-8-EWP**, **W-3000-EWP** (in push-to-talk mode) or **E-30-PT-EWP** are recommended.

#### A. VE-3x5 Surface Mount Box

Material: 16 gauge CRS Finish: UV stable black fine texture powder paint *Important:* The VE-3x5 is not compatible with the VE-GNP pedestals.

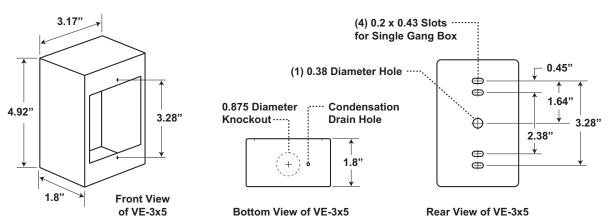

### B. VE-5x5 / VE-5x5-SS Surface Mount Box

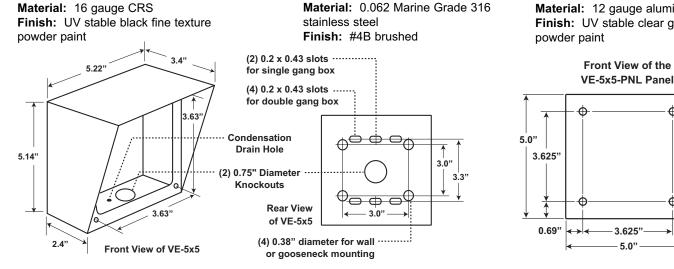

stainless steel

Finish: #4B brushed

)Ò ÷

3.0'


Material: 0.062 Marine Grade 316

3.0"


3.3"

#### D. VE-6x7 / VE-6x7-SS Surface Mount Box

Material: 16 gauge CRS Finish: UV stable black fine texture powder paint

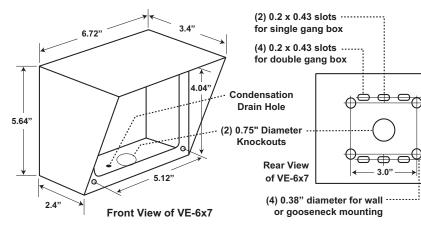


### F. VE-5x10 / VE-5x10-SS Surface Mount Box

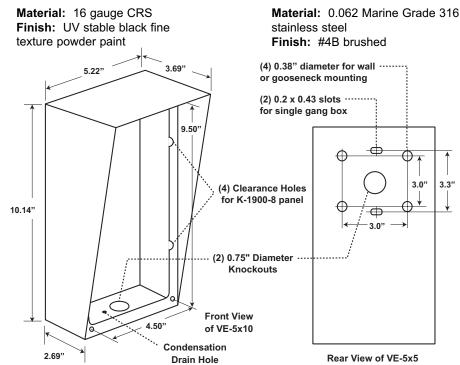

# E. VE-6x7-PNL/SS Panel


Material: 12 gauge aluminum Finish: UV stable clear gloss powder paint



### G. VE-5x10-PNL/SS Panel

Material: 12 gauge aluminum Finish: UV stable clear gloss powder paint

> Front View of the VE-5x5-PNL Panel



#### C. VE-5x5-PNL/SS Panel


Material: 12 gauge aluminum Finish: UV stable clear gloss

ф

ф

#### H. VE-GNP Gooseneck Pedestal

**Description:** 42" tall, pad mount, steel gooseneck pedestal. Universal car height for most applications. **Material:** CRS (see gauges below) **Finish:** UV stable black wrinkle powder paint **Note:** Adhere included gasket to back of **VE-Series** backbox then fasten backbox to pedestal.




### J. VE-GNP-IG

**Description:** 64" tall, in-ground/wet cement mount, steel gooseneck pedestal. Insert bottom approximately 22" into ground/cement for 42" tall pedestal (universal car height for most applications).

Material: CRS (11 gauge)

**Finish:** UV stable black wrinkle powder paint **Note:** Adhere included gasket to back of **VE-Series** backbox then fasten backbox to pedestal.




## Product Support Line...715.386.8666

I. VE-GNP-SS Gooseneck Pedestal Description: 42" tall pad mount stainless s

**Description:** 42" tall, pad mount, stainless steel gooseneck pedestal. Universal car height for most applications. **Material:** 304 Stainless Steel (see gauges below) **Finish:** #4B Brushed

**Note:** Adhere included gasket to back of **VE-Series** backbox then fasten backbox to pedestal.




### K. VE-GNP-2 Gooseneck Pedestal

**Description:** 42"/72" tall, dual-height, pad mount, steel gooseneck pedestal. Ideal for both car and truck applications. **Material:** CRS (see gauges below)

Finish: UV stable black wrinkle powder paint

**Note:** Adhere included gasket to back of **VE-Series** backbox then fasten backbox to pedestal.

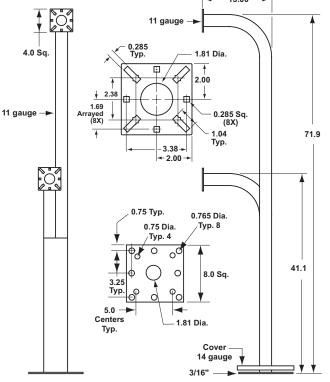

## Fax Back Line...715.386.4345

Due to the dynamic nature of the product design, the information contained in this document is subject to change without notice. Viking Electronics, and its affiliates and/or subsidiaries assume no responsibility for errors and omissions contained in this information. Revisions of this document or new editions of it may be issued to incorporate such changes.