

MOTOWORKS AUSTRALIA

ASSEMBLING MANUAL

110CC SPORTS

125CC SPORTS

125CC FARM



110CC SPORTS ASSEMBLING




Parts include in the package

1. Partly Assembled body
2. Wheel x 4
3. Wheel Cap x 4
4. Handle Bar Bracket x 2
5. Front Bull Bar x 1



Step 1: Mount the handle bar to the ATV (Some of Model will have number plate)

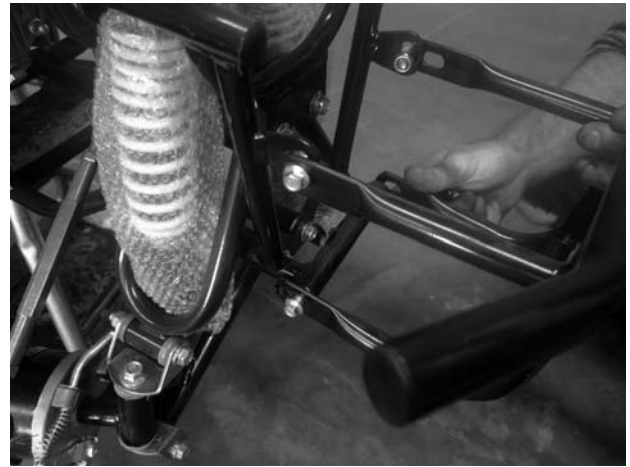


Step 2: Install front bull bar



Step 3 : Mount the bottom of the front shock to the front swing arm socket



Step 4 : Mount ball joint arm to the front swing arm

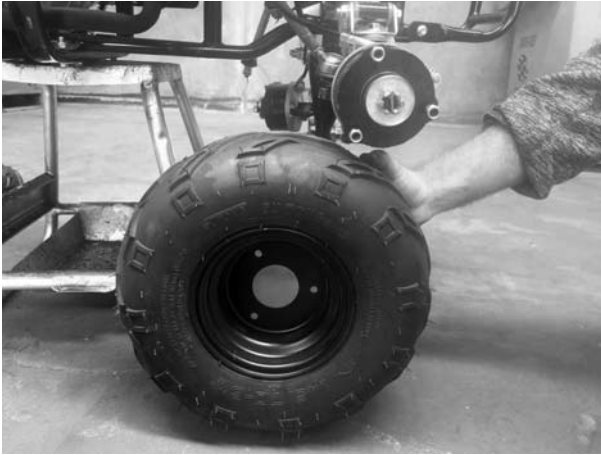

Step 5: Use provided nut on the hub to install both front wheels



Step 6: Use provided bolts and nuts complete rear wheel installation



Step 7: Put on provided wheel cap to cover 4 wheels axle nuts



Step 8 : Access the battery from side of rear wheel. Connect the negative lead to the battery



Step 9: Install the breath hose on the fuel cap



Step 10 : Insert the key to the key berral.


Assembling Complete

125CC ATV ASSEMBLING



Parts include in the package

1. Partly Assembled body
2. Wheel x 4
3. Wheel Cap x 4
4. Handle Bar Bracket x 2
5. Front Bull Bar x 1
6. Rear Rack x 1
7. Gear Indicator Panel x 1
8. Bar Busters x 2
9. Key barrel x 1

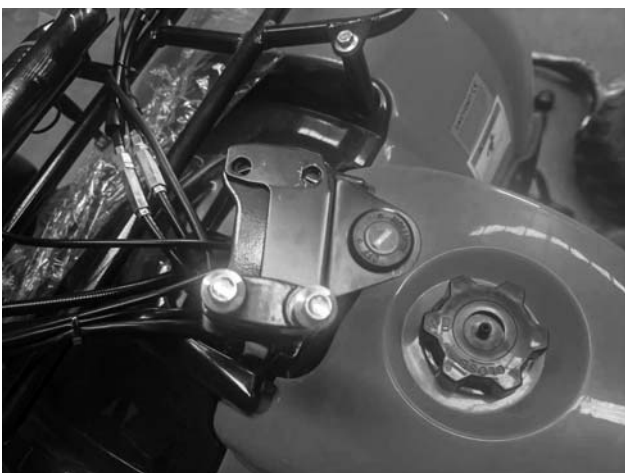

Step 1: Place the key barrel between the handle bar and mounting bracket



Step 2: Mount the handle bracket and install the handle on top of the key barrel



Step 3 : Mount the gear indicator on top of the handle bar mounting bracket



Step 4 : Install the bar bruster on both end with provided bolts and nuts




Step 5: Mount the top end of front shocker to the frame for both side



Step 6: Mount the front ball joint arm to the front stub axle for both side



Step 7 : Undo the axle nut and remove the front wheel hub. insert the drum brake assembling to the stub axle and retighten the axle nut.

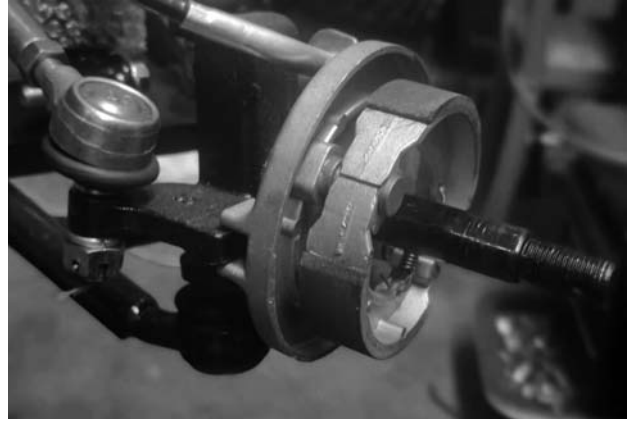

Step 8 : Mount the wheel to the hub with provided nuts for both side



Step 9 : Mount the rear wheel to the rear axle with provided bolts and nuts



Step 10 : Access the seat lock from the rear. unlock the seat to access the battery. Connect the negative lead to the battery and reinstall the seat



Step 11 : Three mounting position on each side of front rack. install the front bull bar with provided bolts and nuts



Step 11 : Rear Rack has two mounting position on each side, mount with provided bolts and nuts

Assembling Complete