

Model

ST-2059-A Universal Closet

Top Spud Vitreous China Elongated Water Closet

DESCRIPTION

Complete vitreous china water closet.

Flush Cycle

Model ST-2059-A Universal Closet

(1.1 to 1.6 gpf/4.2 to 6.0 Lpf)

Code: 2102059

Flush volume is determined by the flushometer used with closet.





- * Please note that this model is fully interchangeable with Models: ST-2050-A, ST-2052-A, ST-2053-A and matches all dimensional and performance parameters.
- ** This model meets the requirements for a High Efficiency Toilet when used with a high efficiency flushometer (1.28 gpf/4.8 Lpf or 1.1/1.6 gpf-4.2/6.0 Lpf dual-flush).




Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed according to these requirements.

Plumbing System Requirements √ Minimum **Flowing** Pressure: 25 PSI

√ Maximum Static Pressure: 80 PSI

√ Minimum Flow Rate: 18 gpm

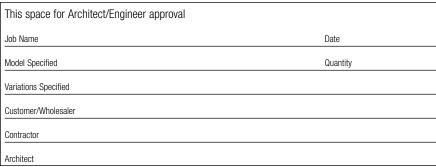

SPECIFICATIONS

Water Closet


- · Wall hung vitreous china elongated bowl
- Siphon jet flushing action
- 1-1/2" I.P.S. top spud inlet
- 2-1/8" fully glazed trapway diameter
- · Mounting hardware, carrier and toilet seat not included
- · Integral flushing rim
- Water spot area 9 1/2" x 8 1/4"
- ASME A112.19.2/CSA B45.1

Colors/Finishes


White

Recommended Seats

- Bemis 1955CT/1955SSCT & 2155CT/2155SSCT
- Church 295CT/295SSCT & 2155CT/2155SSCT

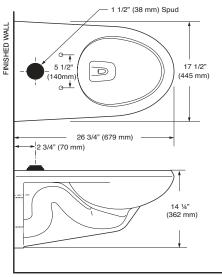

FINISHED FLOOR

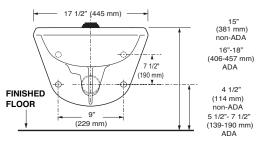

Designed to Meet ADA standards when bowl is 17" - 19" high including seat

NOTE: All vitreous china dimensions shown in these drawings are nominal. Dimensions can vary within the tolerances established in the governing ASME A112.19.2/CSA B45.1 standard. Please take this into consideration when planning rough-in and plumbing layouts.

Product Specification

Elongated water closet shall be made of vitreous china with a 1-1/2" top spud inlet. Bowl shall be ADA compliant when installed at required height of 17"-19" from floor to top of fixture (including seat). Water Closet shall be Sloan Model ST-2059-A.





© 2013 Sloan Valve Company ST-2059 10-13