



Installation Instructions

Packaging Contents


Tent



Tent Poles




Tent Bag




Guy Ropes



Rain Fly



Stakes



Your tent may look different the pictures. Pictures are for illustration purposes only.

Scan the QR Code for More Installation Instructions



Need installation help? Missing parts?

Text us to 360-215-3930 or email us to questions@offroadinggear.com

⚠ Warning! NEVER RUN VEHICLE WITH TENT INSTALLED

Never run the vehicle with the tent installed to avoid danger of carbon monoxide poisoning. Ensure cargo area sleeve is installed over exhaust pipes. Do not have exposed exhaust pipes facing into the tent.

⚠ WARNING

- Keep all flame and heat sources away from the tent fabric. The tent is made with flame-resistant fabric which meets CPAI-84 specifications. This does not make it fireproof. The fabric will burn if left in contact with any flame source. The application of any foreign substance to the tent fabric may render the flame-resistant properties ineffective.
- To prevent carbon monoxide from entering the vehicle and tent area, do not run the engine, do not cook inside the tent, and do not use a gas heater in the tent. Carbon monoxide is dangerous to your health.
- Engine must be off and exhaust must be fully cooled before tent installation and use.

CAUTION


- NEVER run the engine while the tent is installed.
- Do not refuel lanterns, stoves or heaters inside tent.
- Do not cook inside the tent.
- Do not store flammable liquids inside the tent.
- NEVER allow the vehicle engine to run while you are inside the tent
- Do not install the tent when the outside temperature is less than 0°C/32°F as it may cause damage.
- Do not install the tent when your vehicle is wet as it may cause damage.

Choosing a Campsite

- Select a level site clear of rocks, branches, and other hard or sharp objects, to set up your tent.
- Position the vehicle in the desired campsite. Turn off the engine. Apply the parking brake.


Setting Up the Tent

Position the tent with the vehicle sleeve towards the cargo area of your vehicle.

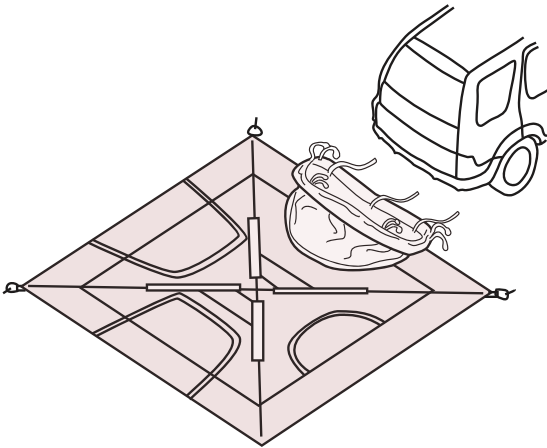


Extend the Frame


Pull up center after legs are extended.

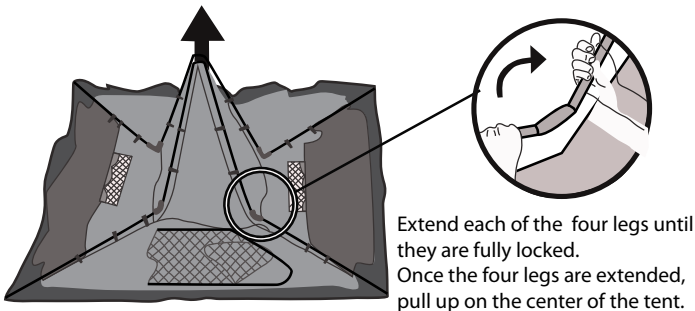

Raise the Tent

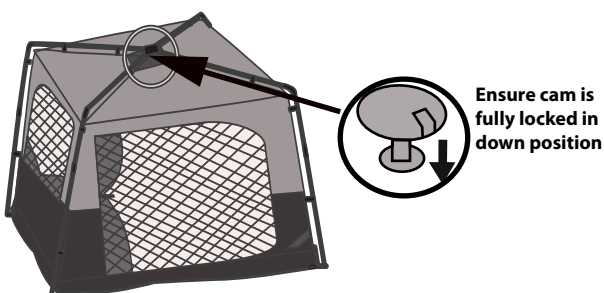

Verify the Connection Between the Tent & the Frame Poles

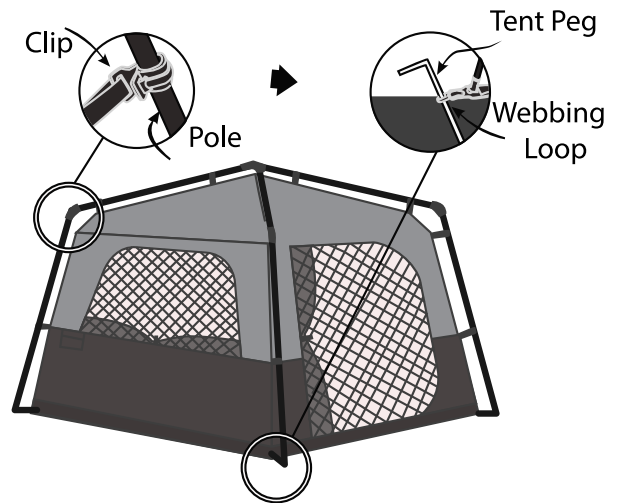


Ensure all the pole clips are attached to the poles. Secure the four corners of the tent with the included tent stakes.

Secure the Sleeve to Cargo Area


From inside of the tent, unzip the door that faces the vehicle cargo area. Roll up the mesh and door and secure it.

Next, open the back hatch of your vehicle.

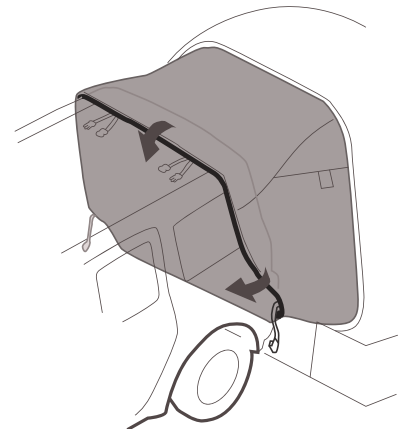

Put sleeve around bumper

There is an elasticized sleeve that goes around the bumper of your vehicle. Slide this around the bumper. There is also a clip on the elasticized sleeve that can be secured to the hatchback latch.

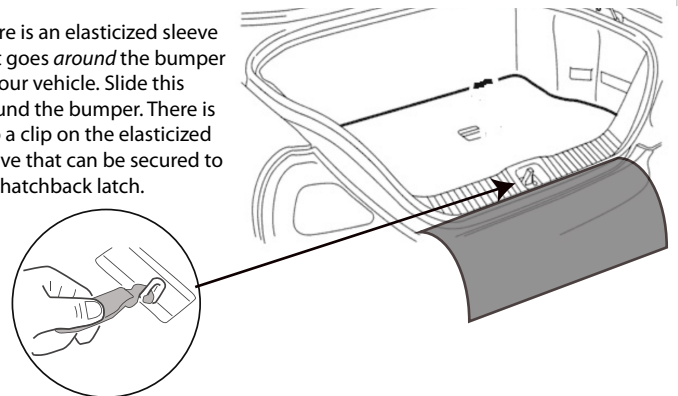


Warning!

Ensure exhaust pipes are covered by the cargo area sleeve. DO NOT have exposed exhaust pipes facing into tent.


Secure the Sleeve to Cargo Area (cont'd)

Secure the straps to behind the wheel well (one per side)

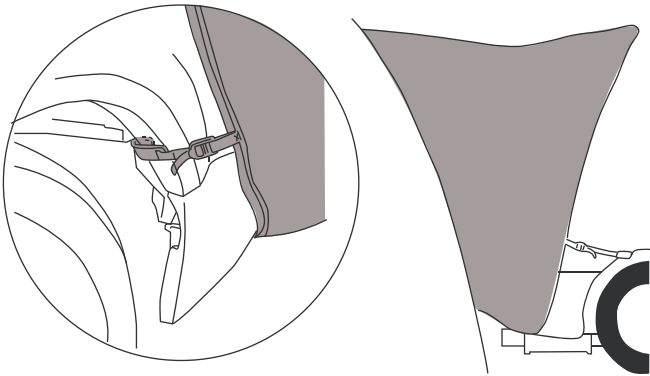


Secure to Roof Area (with Roof Rack Bars)

If you have a roof rack with bars, secure the top straps around the bars as shown here. Before securing the straps, you will need to remove the long strap that is attached to the female clip (this strap is not used if you have roof rack bars)

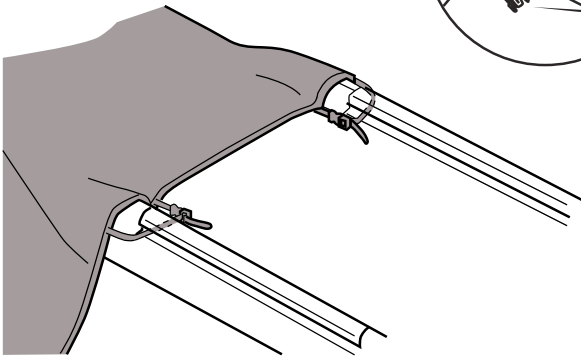


Secure to Roof Area (without Roof Rack Bars)

If you do not have roof rack bars then open the hood, and secure the straps to either the hood frame or hinges.

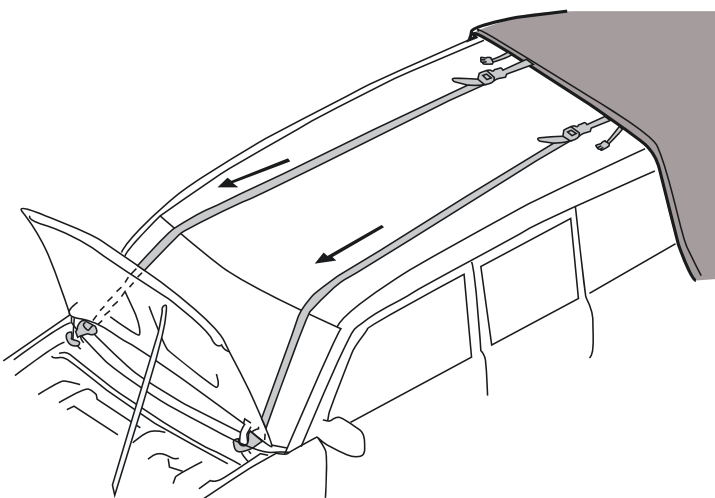

Note, some vehicle hoods may not be able to close with the use of the hooks. If so, find another suitable location to secure the straps to.

Tighten Straps within Cargo Area

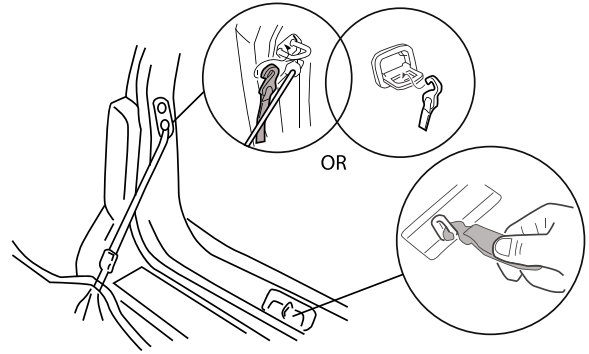


From inside the tent, find the center strap and attach the hook to the middle tailgate latch. Secure the two side straps to either the the cargo bay area hooks or the tailgate latch

Warning!


Ensure exhaust pipes are covered by the cargo area sleeve. DO NOT have exposed exhaust pipes facing into tent.

Attach the Rain Fly

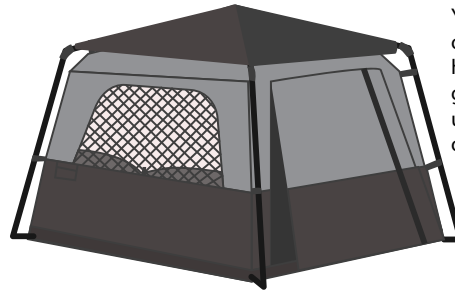

Pull the rainfly over the tent. You can gently toss the rainfly over the top of the tent. It may help if you attach one of the guy ropes to the rainfly and use this to help pull the rainfly over the tent.

Stake the Rainfly Guy Ropes to the Ground



Once the rainfly is over the tent, secure it to the ground with the included guy ropes.

Raise the Door Canopy

To install the canopy, attach the two poles to the two corners of the canopy and secure the canopy with two guy lines.

