



## Sequence Report



Pre-Sequence Inputs:

ID:

### Summary

#### SIG 1 - Scope Views (44.1khz)

1khz Tone View	✓ PASSED
15khz Tone View	✓ PASSED
-90.31dBFS 1khz 16 bit undithered sine (96khz Bandwidth)	✓ PASSED
-90.31dBFS 1khz 16 bit dithered sine (96khz Bandwidth)	✓ PASSED
-90.31dBFS 1khz 24 bit undithered sine (96khz Bandwidth)	✓ PASSED
-90.31dBFS 1khz 24 bit dithered sine (96khz Bandwidth)	✓ PASSED
Filter Ultrasonic Attenuation	✓ PASSED
20hz-90khz Noise RMS Level	✓ PASSED

#### SIG 1.5 - Scope Views (44.1khz)

1khz Tone View	✓ PASSED
15khz Tone View	✓ PASSED
-90.31dBFS 1khz undithered 16b sine (1Mhz bandwidth)	✓ PASSED
-90.31dBFS 1khz dithered 16b sine (1Mhz bandwidth)	✓ PASSED
-90.31dBFS 1khz undithered 24b sine (1Mhz bandwidth)	✓ PASSED
-90.31dBFS 1khz dithered 24b sine (1Mhz bandwidth)	✓ PASSED
Filter Ultrasonic Attenuation	✓ PASSED
1Mhz RMS Noise Level	✓ PASSED

#### SIG 2 - Main Measurements (44.1khz)

Output Level (Vrms)	✓ PASSED
Frequency Response (Audible Band)	✓ PASSED
20hz-20khz Noise RMS Level	✓ PASSED
Idle Noise FFT	✓ PASSED
1khz FFT (0dbfs)	✓ PASSED
1khz FFT (-3dbfs)	✓ PASSED
50khz FFT (0dbfs)	✓ PASSED
50hz FFT (-3dbfs)	✓ PASSED
Effective Number of Bits 0dbfs	✓ PASSED
Effective Number of Bits -3dbfs	✓ PASSED
THD+N 0dbfs	✓ PASSED
THD+N -3dbfs	✓ PASSED

THD+N/Frequency	✔ PASSED
Dynamic Range - AES17	✔ PASSED
Signal to Noise Ratio	✔ PASSED
IMD ( SMPTE )	✔ PASSED
50hz/7khz IMD SMPTE FFT	✔ PASSED
IMD Level Sweep ( SMPTE )	✔ PASSED
Linearity	✔ PASSED
Linearity (No Bandpass)	✔ PASSED
Crosstalk Sweep, One Channel Driven	✔ PASSED
DC Offset (active)	✔ PASSED
DC Offset (idle)	✔ PASSED
SIG 3 - 44.1khz Jitter	
44.1khz J-Test (Jitter)	✔ PASSED
SIG 4 - 48khz Jitter	
48khz J-Test (Jitter)	✔ PASSED
SIG 5 - Bandwidth (192khz)	
90khz Bandwidth	✔ PASSED
SIG 6 - THD and Phase vs Frequency	
THD+N vs frequency (AES 40khz filter)	✔ PASSED
Interchannel Phase and Group Delay	✔ PASSED
SIG 7 - Wideband and Intersample Overs	
Wideband idle noise	✔ PASSED
1khz 0dbfs wideband	✔ PASSED
1khz -3dbfs wideband	✔ PASSED
Intersample Overs (+3dB)	✔ PASSED
Intersample Overs (+1dB)	✔ PASSED
SIG 8 - Multitone	
32 Tone Test	✔ PASSED
Sequence Result:	
Sequence Result:	✔ PASSED



## Sequence Report



### SIG 1 - Scope Views (44.1kHz) : Signal Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	44.1000 kHz
Output Latency:	Auto
Buffer Size:	1024
Clock Source:	Big Ben
Input 1:	Analog Balanced
Measure:	Auto
Channels:	Auto (2 Channels)
Ch1	Data from Ch1, Sensitivity = 0.00 dB, Gain = 0.00 dB
Ch2	Data from Ch2, Sensitivity = 0.00 dB, Gain = 0.00 dB
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Input EQ:	None
Termination:	200 kohm
High Performance Sine Analyzer:	Disabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	4.001 Vrms
dBrB:	4.001 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	3.000 dB
dB SPL1:	4.001 Vrms
dB SPL2:	4.001 Vrms
dB SPL1 Calibrator Level:	60.000 dB SPL



## Sequence Report



dB SPL2 Calibrator Level:	50.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising



## Sequence Report




### SIG 1 - Scope Views (44.1kHz) : 1kHz Tone View

Waveform: Sine  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 22/01/2023 21:13:47  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 1  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:13:47.072)



# Sequence Report AP

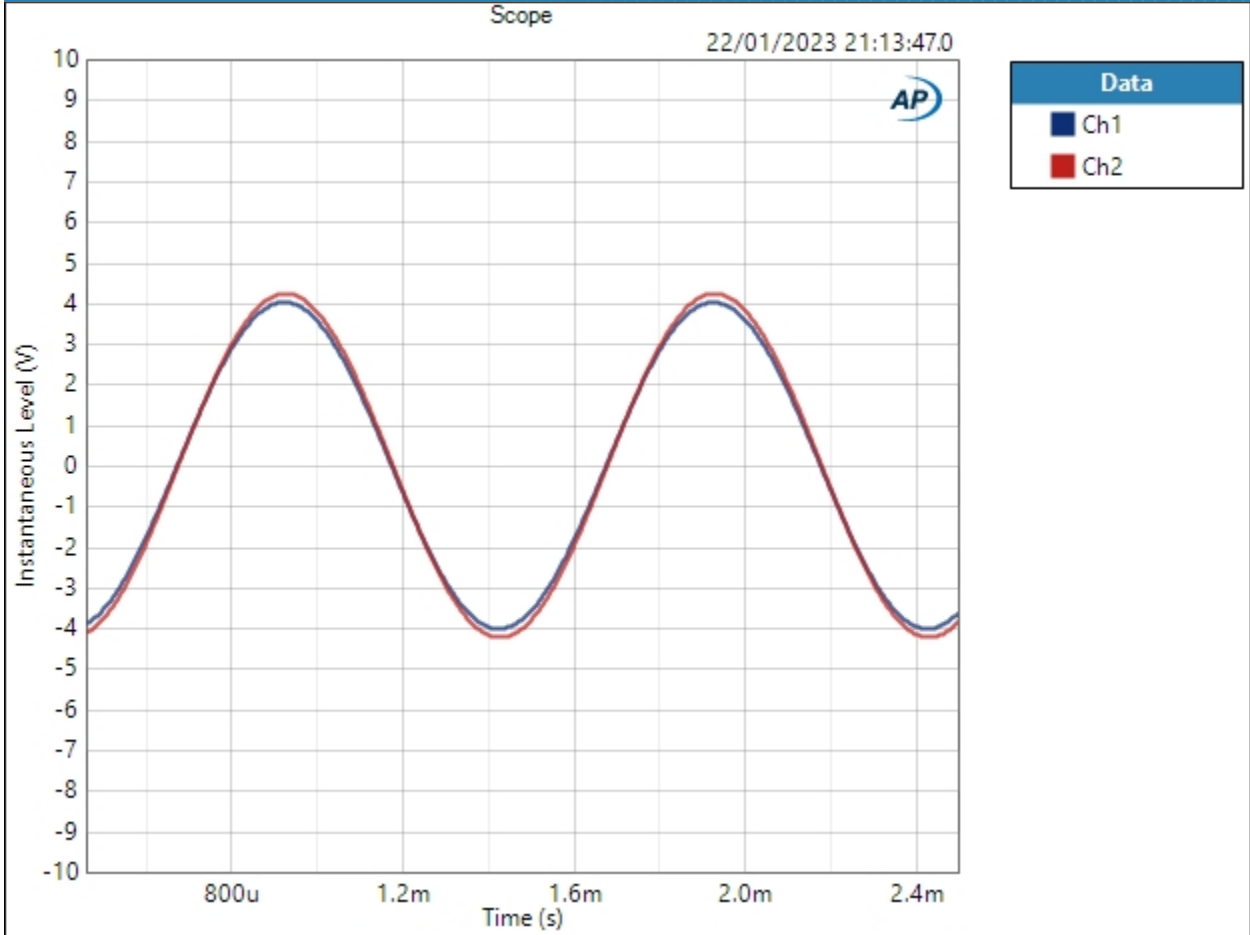

Scope Parameters

Interpolated: On

Result: ✔ PASSED



## Sequence Report




### SIG 1 - Scope Views (44.1kHz) : 15kHz Tone View

Waveform: Sine  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Frequency: 15.0000 kHz  
Secondary Source: None  
Measured 1: 22/01/2023 21:13:53  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 1  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:13:53.432)



# Sequence Report

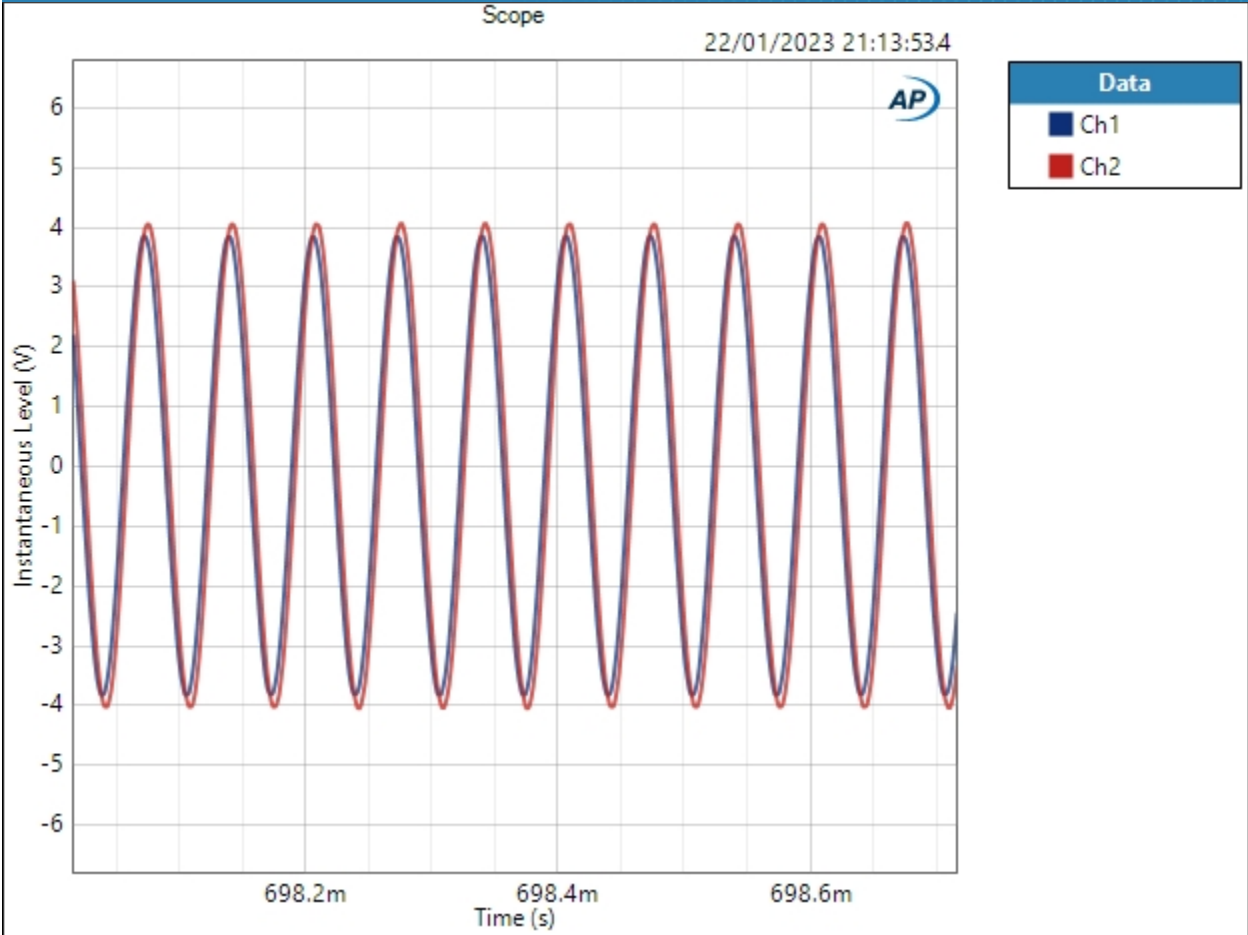

### Scope Parameters

Interpolated: On

Result: PASSED





## Sequence Report



SIG 1 - Scope Views (44.1kHz) : -90.31dBFS 1kHz 16 bit undithered sine (96kHz Bandwidth)

Waveform: 1kHz -90.31dB undithered 16b sine.wav

Bit Exact: True

Start Offset (sec): 0.000 s

Secondary Source: None

Measured 1 22/01/2023 21:14:00

Acquisition Type: Auto

Trigger: Free Run

Delay Time: 250.0 ms

Input Bandwidth: Use Signal Path

FFT Length: 262144

Averaging: Power

Averages: 1

Window: AP-Equiripple


Record Acquisition: False

Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:14:00.201)



## Sequence Report

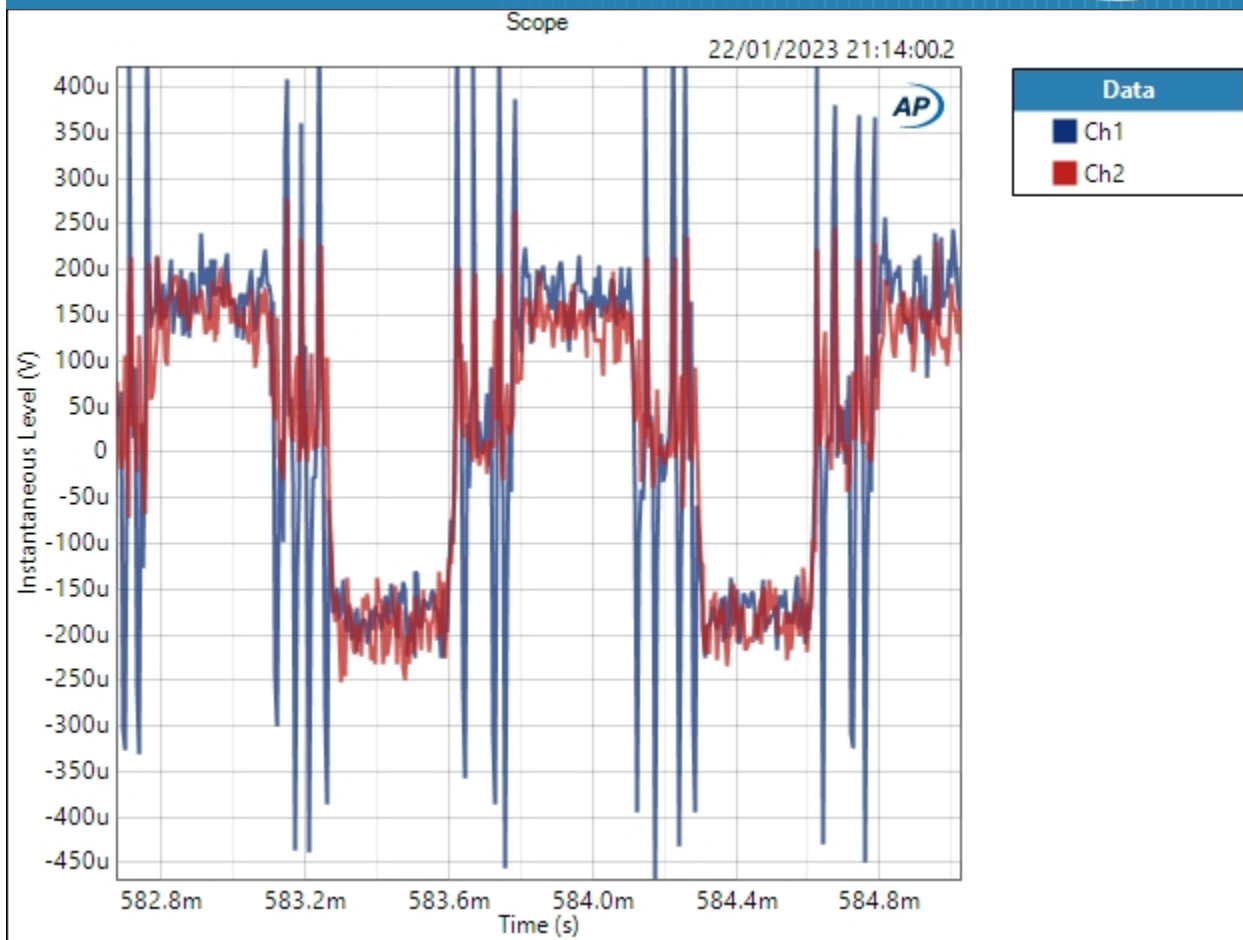

Scope Parameters

Interpolated: On

Result: PASSED



## Sequence Report



SIG 1 - Scope Views (44.1kHz) : -90.31dBFS 1kHz 16 bit dithered sine (96kHz Bandwidth)

Waveform: 1kHz -90.31dB dithered 16b sine.wav

Bit Exact: True

Start Offset (sec): 0.000 s

Secondary Source: None

Measured 1 22/01/2023 21:14:06

Acquisition Type: Auto

Trigger: Free Run

Delay Time: 250.0 ms

Input Bandwidth: Use Signal Path

FFT Length: 262144

Averaging: Power

Averages: 1

Window: AP-Equiripple


Record Acquisition: False

Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:14:06.899)



# Sequence Report

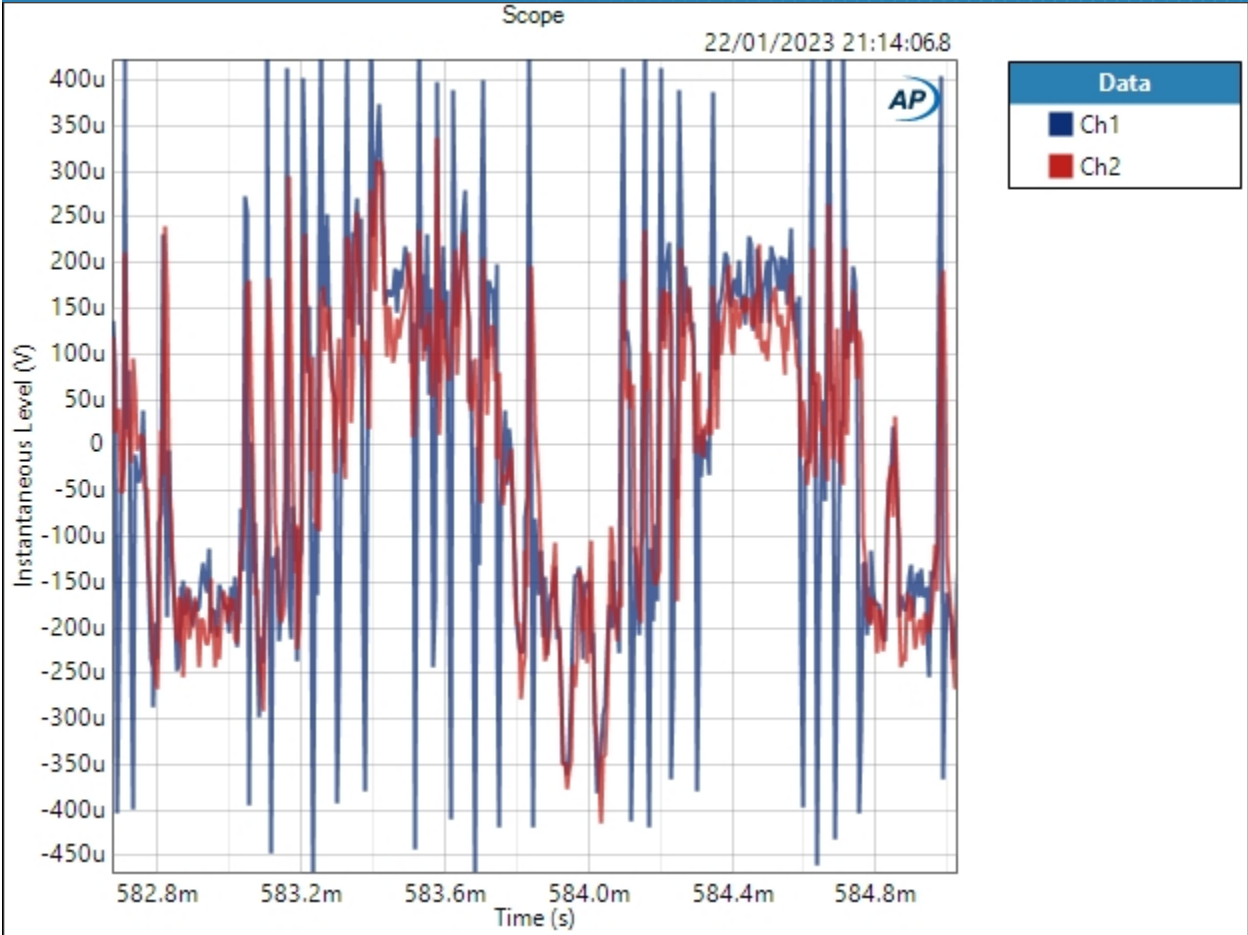

### Scope Parameters

Interpolated: On

Result: PASSED



## Sequence Report



SIG 1 - Scope Views (44.1kHz) : -90.31dBFS 1kHz 24 bit undithered sine (96kHz Bandwidth)

Waveform: 1kHz -90.31dB undithered 24b sine.wav

Bit Exact: True

Start Offset (sec): 0.000 s

Secondary Source: None

Measured 1 22/01/2023 21:14:13

Acquisition Type: Auto

Trigger: Free Run

Delay Time: 250.0 ms

Input Bandwidth: Use Signal Path

FFT Length: 262144

Averaging: Power

Averages: 1

Window: AP-Equiripple


Record Acquisition: False

Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:14:13.623)



## Sequence Report

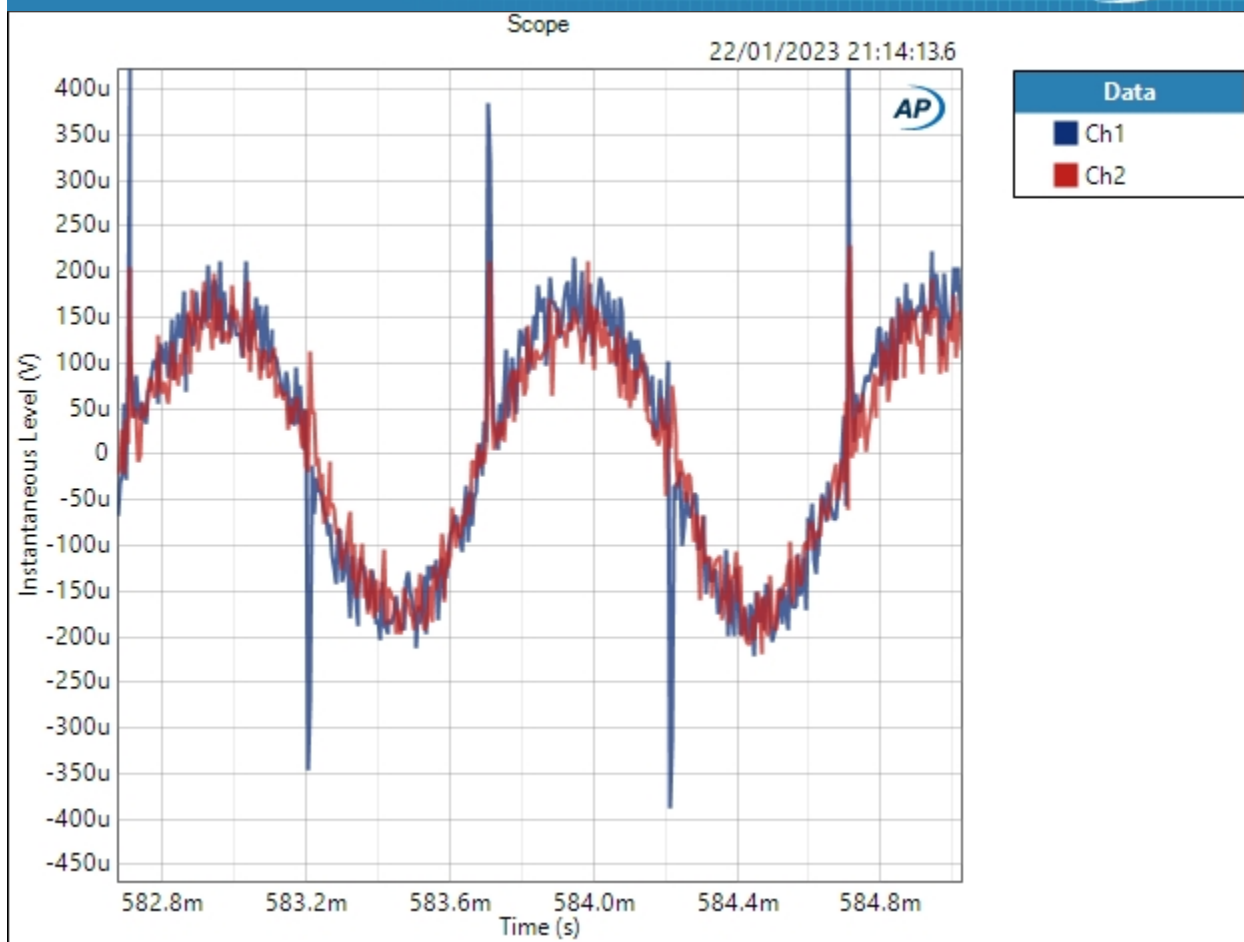

Scope Parameters

Interpolated: On

Result: PASSED



## Sequence Report



SIG 1 - Scope Views (44.1kHz) : -90.31dBFS 1kHz 24 bit dithered sine (96kHz Bandwidth)

Waveform: 1kHz -90.31dB dithered 24b sine.wav

Bit Exact: True

Start Offset (sec): 0.000 s

Secondary Source: None

Measured 1 22/01/2023 21:14:20

Acquisition Type: Auto

Trigger: Free Run

Delay Time: 250.0 ms

Input Bandwidth: Use Signal Path

FFT Length: 262144

Averaging: Power

Averages: 1

Window: AP-Equiripple


Record Acquisition: False

Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:14:20.421)



# Sequence Report

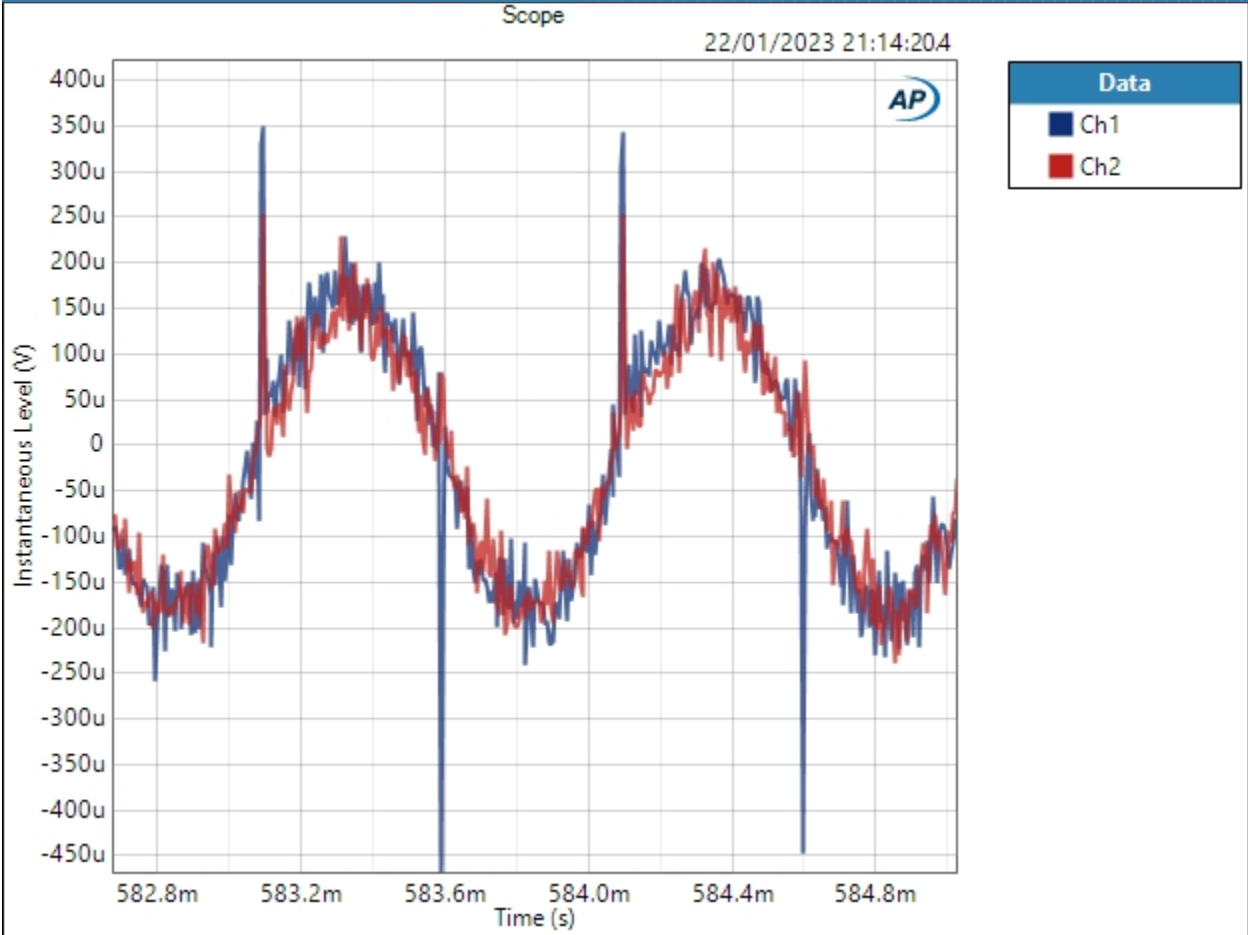

### Scope Parameters

Interpolated: On

Result: PASSED





## Sequence Report




### SIG 1 - Scope Views (44.1khz) : Filter Ultrasonic Attenuation

Waveform: Noise  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Noise Shape: White  
Secondary Source: None  
Measured 1: 22/01/2023 21:20:26  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 500.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 1248000  
Averaging: Power  
Averages: 50  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:20:26.270)



# Sequence Report AP

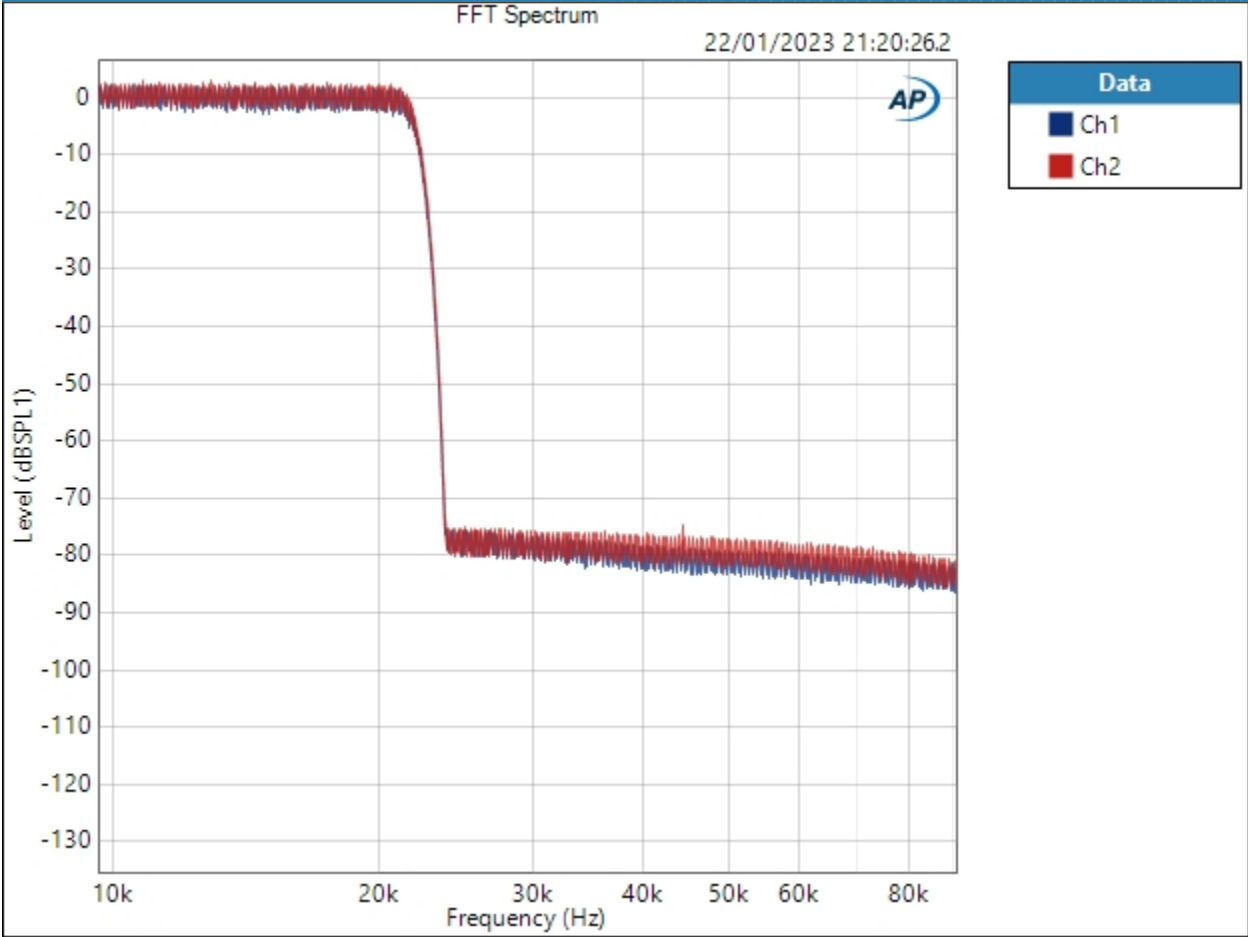

Result: ✔ PASSED



## Sequence Report



SIG 1 - Scope Views (44.1kHz) : 20hz-90kHz Noise RMS Level

Waveform: None  
High-pass Filter: Elliptic  
High-pass Frequency: 20 Hz  
Low-pass Filter: Signal Path  
Weighting Filter: Signal Path  
Acquisition Time: 250.0 ms  
Delay Time: 300.0 ms

Noise Level (22/01/2023 21:20:28.436)

Ch1 23.35 uVrms

Ch2 23.87 uVrms



## Sequence Report



### SIG 1.5 - Scope Views (44.1kHz) : Signal Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	44.1000 kHz
Output Latency:	Auto
Buffer Size:	1024
Clock Source:	Big Ben
Input 1:	Analog Balanced
Measure:	Auto
Channels:	Auto (2 Channels)
Ch1	Data from Ch1, Sensitivity = 0.00 dB, Gain = 0.00 dB
Ch2	Data from Ch2, Sensitivity = 0.00 dB, Gain = 0.00 dB
Input Bandwidth:	AC (<10 Hz) - 1M (2.496 MHz SR)
Input EQ:	None
Termination:	200 kohm
High Performance Sine Analyzer:	Disabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	4.001 Vrms
dBrB:	4.001 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	3.000 dB
dB SPL1:	4.001 Vrms
dB SPL2:	4.001 Vrms
dB SPL1 Calibrator Level:	60.000 dB SPL
dB SPL2 Calibrator Level:	50.000 dB SPL



## Sequence Report



dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising



## Sequence Report




SIG 1.5 - Scope Views (44.1kHz) : 1kHz Tone View

Waveform: Sine  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 22/01/2023 21:20:35  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 1  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:20:35.504)



# Sequence Report

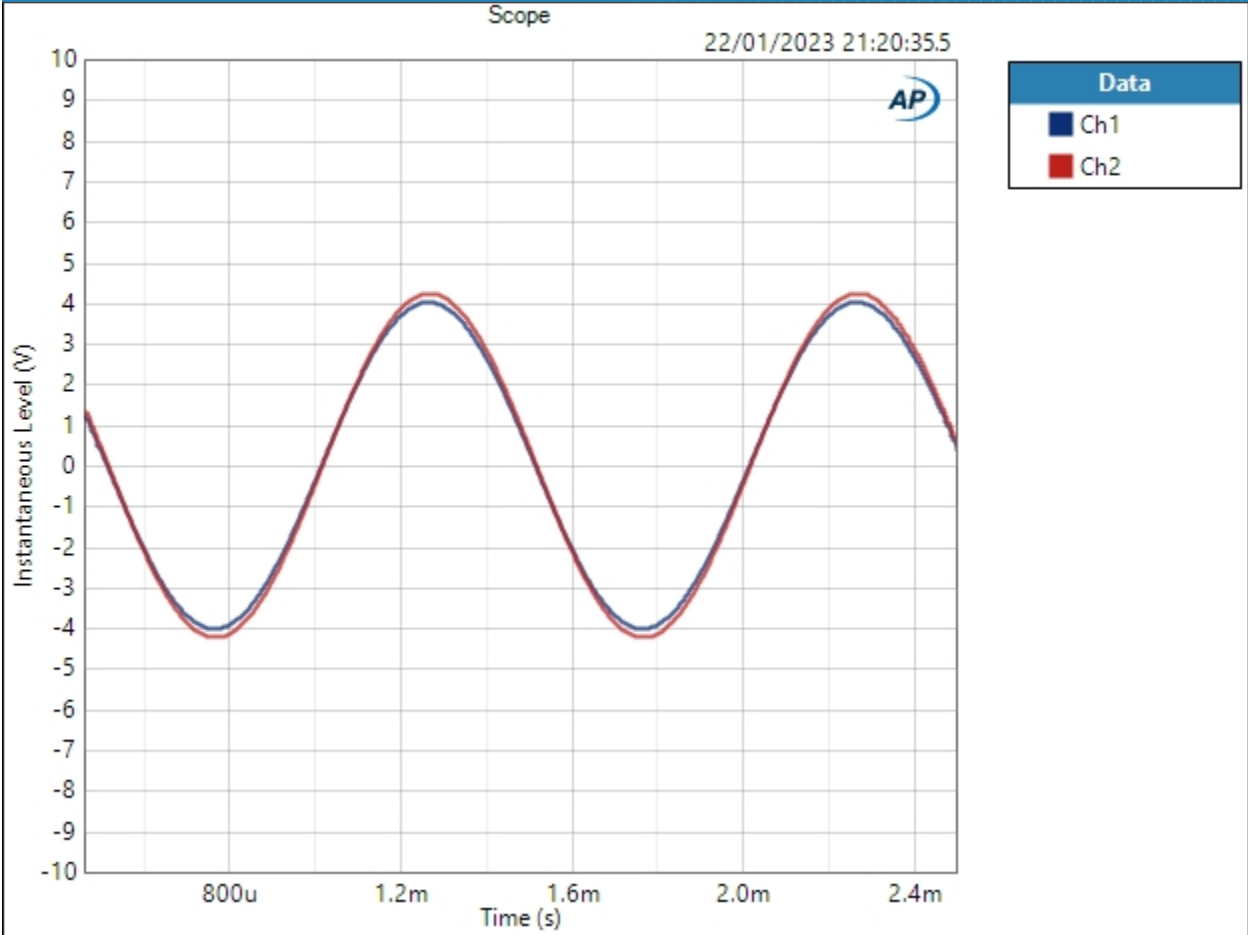

Data	
■	Ch1
■	Ch2

Scope Parameters

Interpolated: On

Result: PASSED



## Sequence Report



SIG 1.5 - Scope Views (44.1kHz) : 15kHz Tone View


Waveform: Sine  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Frequency: 15.0000 kHz  
Secondary Source: None  
Measured 1 22/01/2023 21:20:40  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 1  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:20:40.571)





## Sequence Report

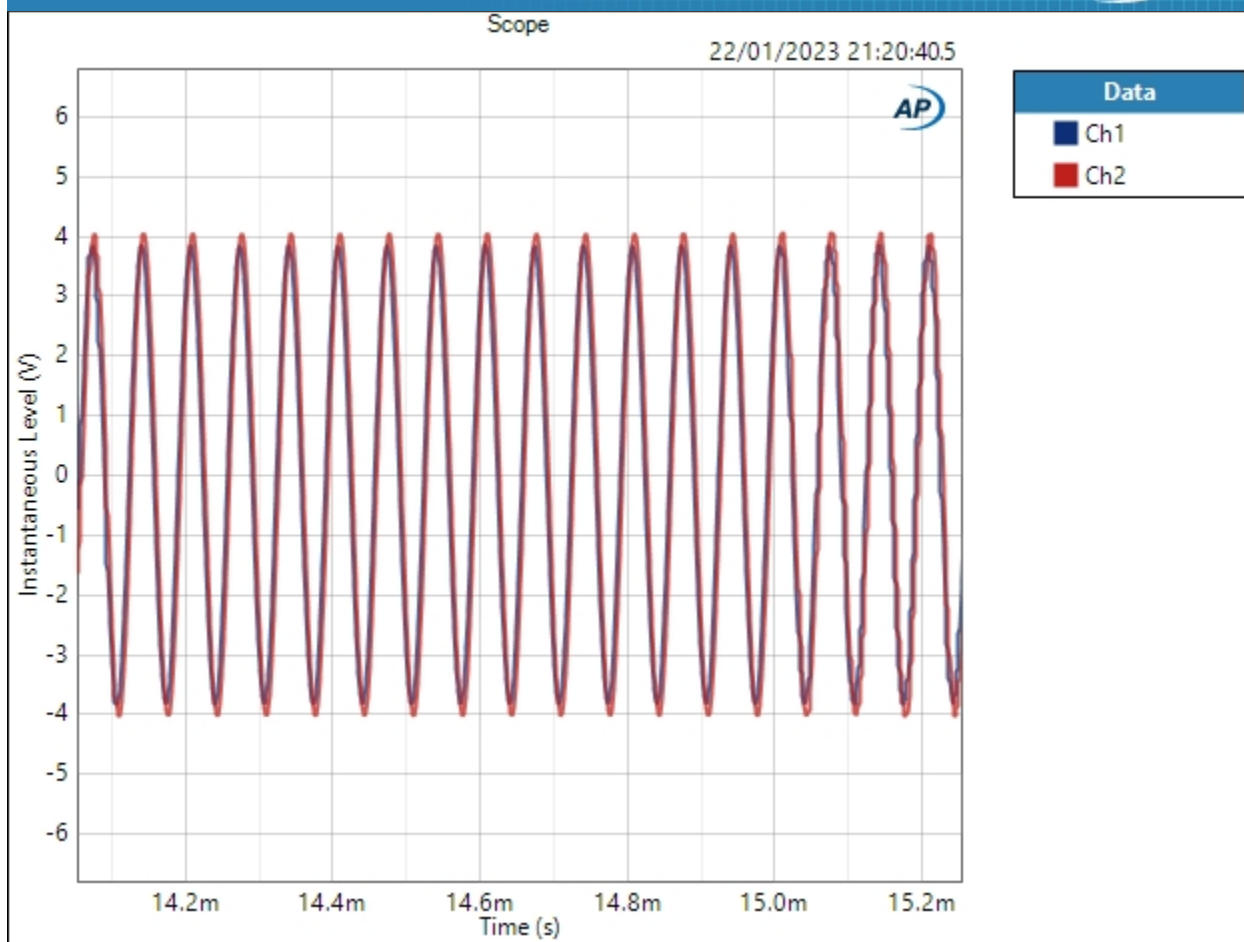

Scope Parameters

Interpolated: On

Result: PASSED



## Sequence Report



SIG 1.5 - Scope Views (44.1kHz) : -90.31dBFS 1kHz undithered 16b sine (1Mhz bandwidth)

Waveform: 1kHz -90.31dB undithered 16b sine.wav

Bit Exact: True

Start Offset (sec): 0.000 s

Secondary Source: None

Measured 1 22/01/2023 21:20:46

Acquisition Type: Auto

Trigger: Free Run

Delay Time: 250.0 ms

Input Bandwidth: Use Signal Path

FFT Length: 262144

Averaging: Power

Averages: 1

Window: AP-Equiripple


Record Acquisition: False

Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:20:46.779)



# Sequence Report

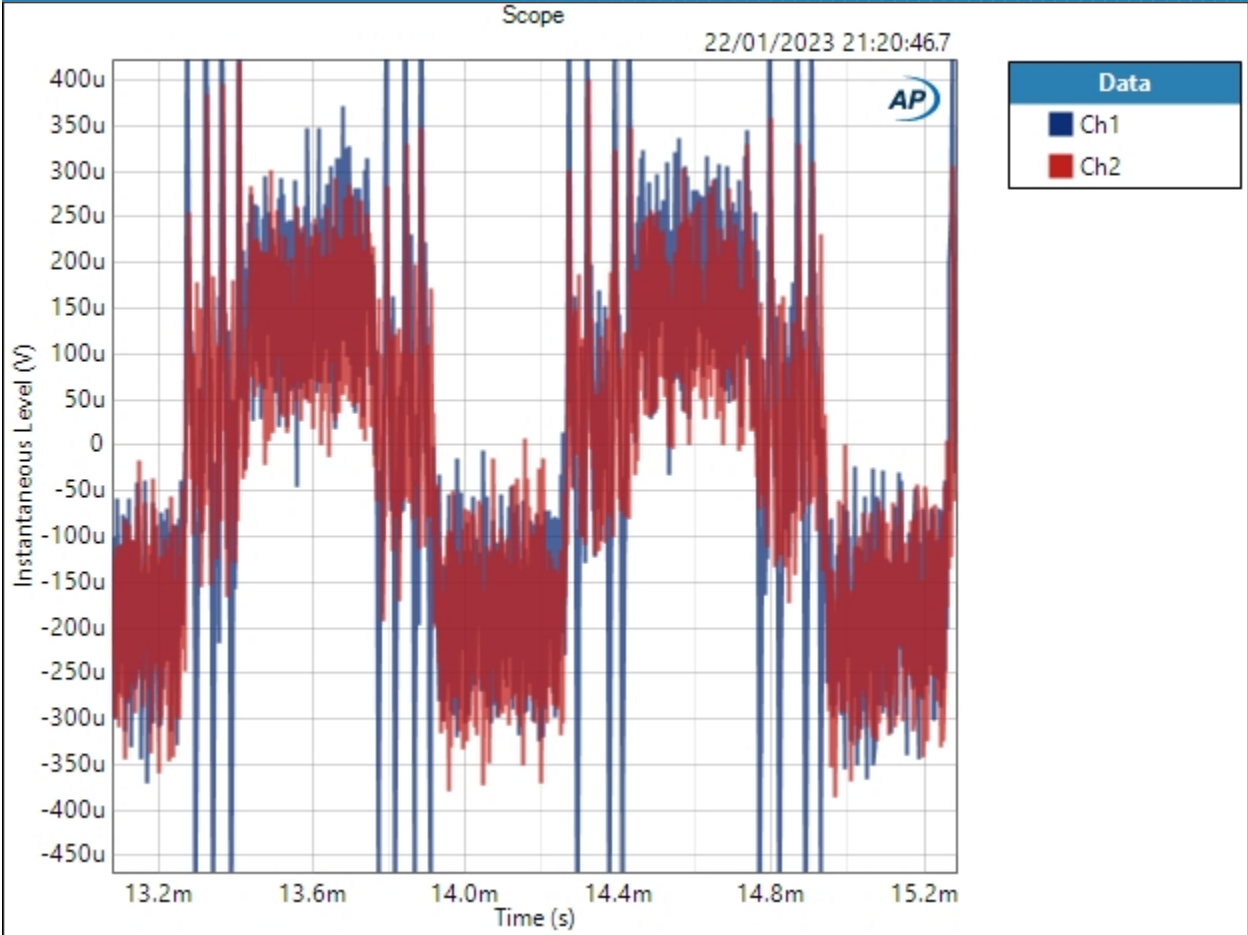

### Scope Parameters

Interpolated: On

Result: PASSED



## Sequence Report



SIG 1.5 - Scope Views (44.1kHz) : -90.31dBFS 1kHz dithered 16b sine (1Mhz bandwidth)

Waveform: 1kHz -90.31dB dithered 16b sine.wav

Bit Exact: True

Start Offset (sec): 0.000 s

Secondary Source: None

Measured 1 22/01/2023 21:20:52

Acquisition Type: Auto

Trigger: Free Run

Delay Time: 250.0 ms

Input Bandwidth: Use Signal Path

FFT Length: 262144

Averaging: Power

Averages: 1

Window: AP-Equiripple


Record Acquisition: False

Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:20:52.170)



## Sequence Report

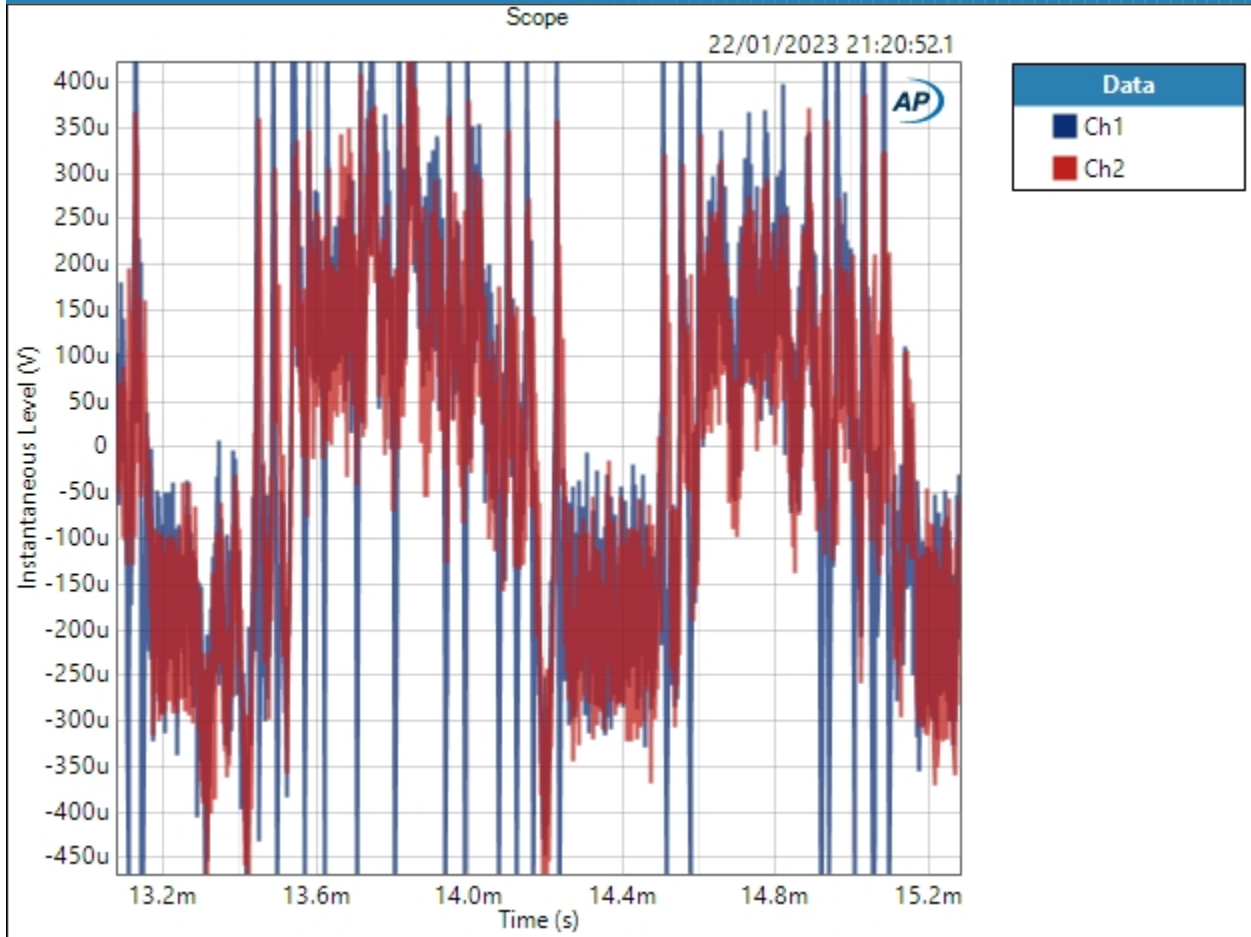

Scope Parameters

Interpolated: On

Result: PASSED



## Sequence Report



SIG 1.5 - Scope Views (44.1kHz) : -90.31dBFS 1kHz undithered 24b sine (1Mhz bandwidth)

Waveform: 1kHz -90.31dB undithered 24b sine.wav

Bit Exact: True

Start Offset (sec): 0.000 s

Secondary Source: None

Measured 1 22/01/2023 21:20:57

Acquisition Type: Auto

Trigger: Free Run

Delay Time: 250.0 ms

Input Bandwidth: Use Signal Path

FFT Length: 262144

Averaging: Power

Averages: 1

Window: AP-Equiripple


Record Acquisition: False

Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:20:57.623)



# Sequence Report

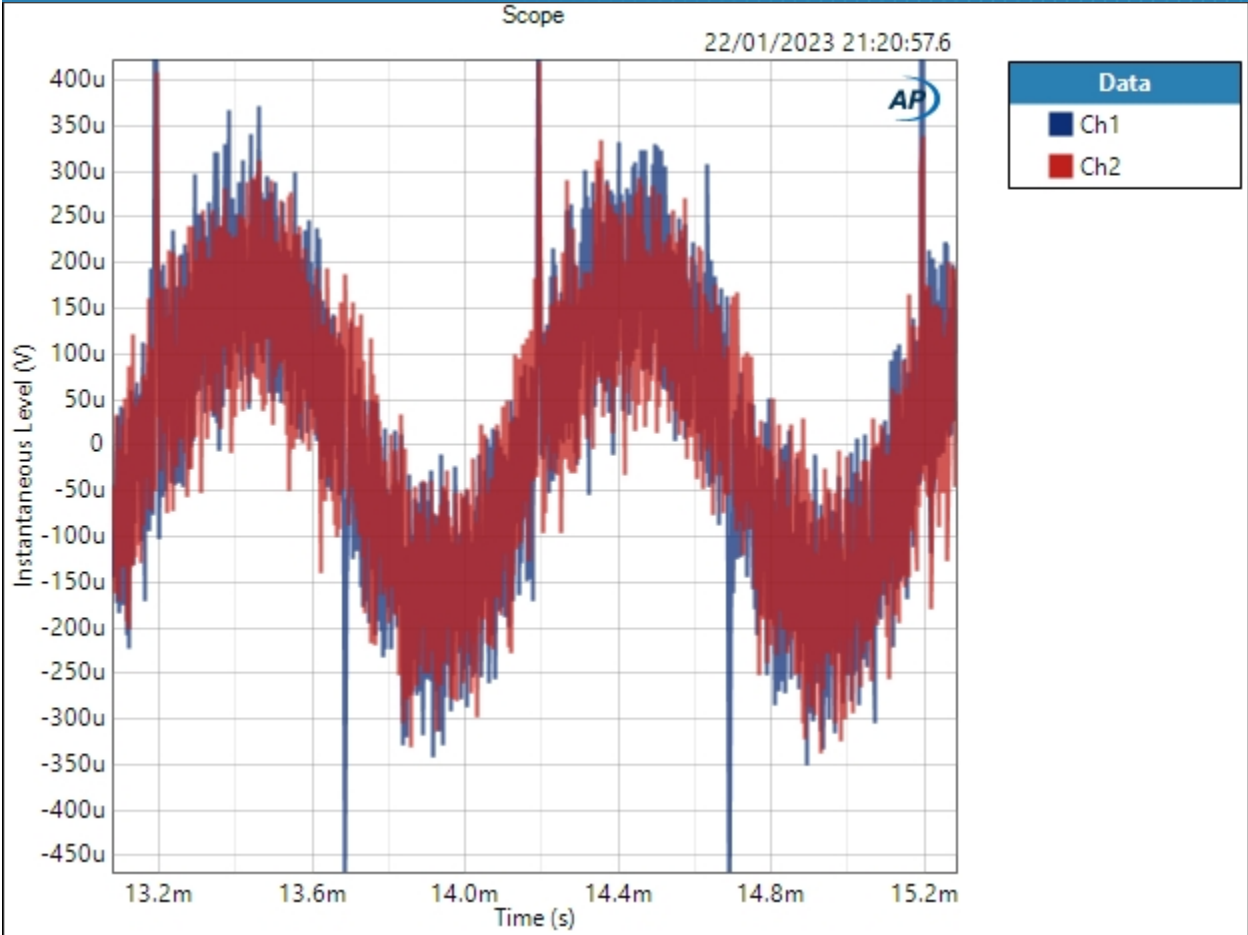

### Scope Parameters

Interpolated: On

Result: PASSED



## Sequence Report



SIG 1.5 - Scope Views (44.1kHz) : -90.31dBFS 1kHz dithered 24b sine (1Mhz bandwidth)

Waveform: 1kHz -90.31dB dithered 24b sine.wav

Bit Exact: True

Start Offset (sec): 0.000 s

Secondary Source: None

Measured 1 22/01/2023 21:21:02

Acquisition Type: Auto

Trigger: Free Run

Delay Time: 250.0 ms

Input Bandwidth: Use Signal Path

FFT Length: 262144

Averaging: Power

Averages: 1

Window: AP-Equiripple

Record Acquisition: False


Recording Type: Multiple Mono PCM (.wav)

Scope (22/01/2023 21:21:02.982)





# Sequence Report AP

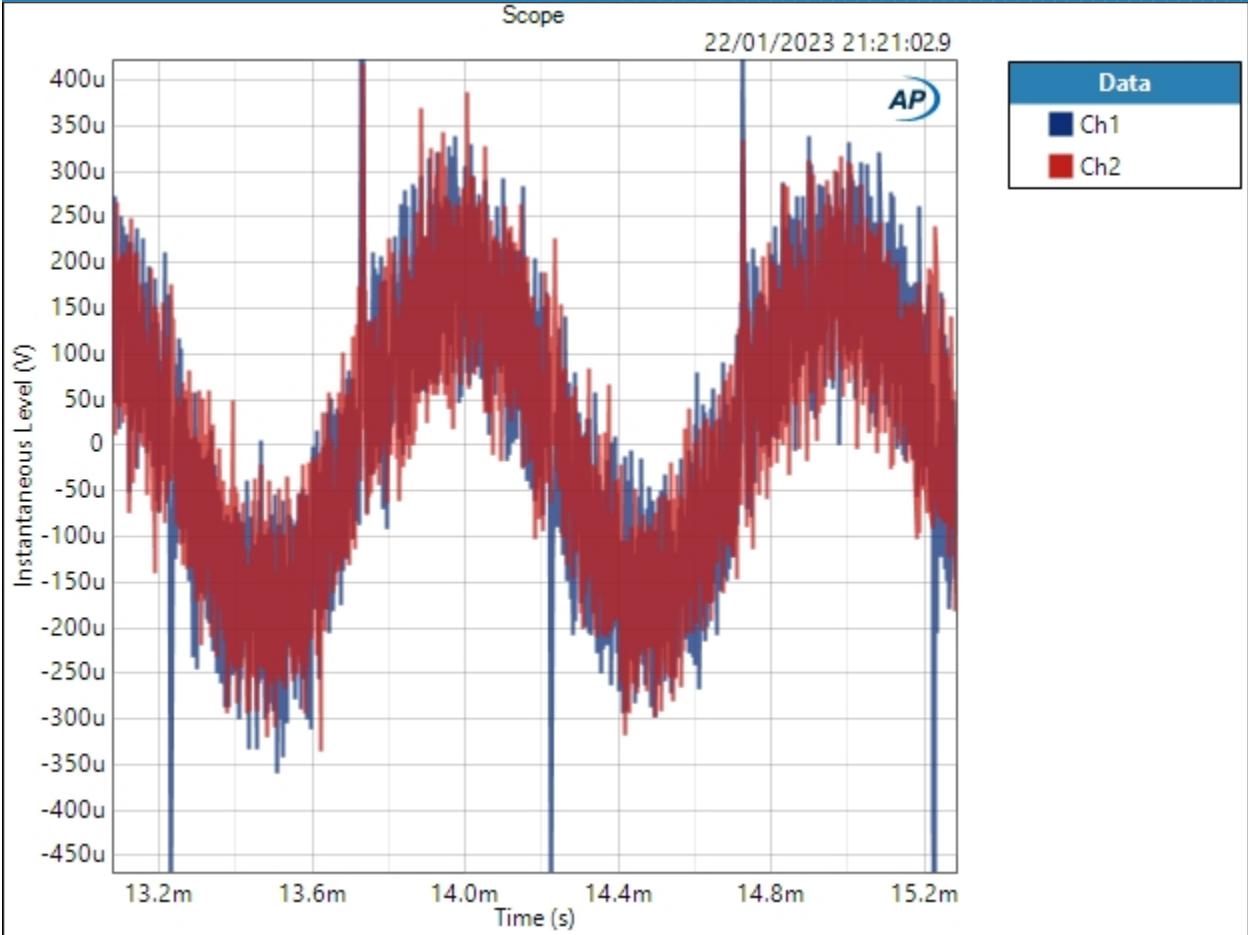

Scope Parameters

Interpolated: On

Result: ✔ PASSED



## Sequence Report




SIG 1.5 - Scope Views (44.1kHz) : Filter Ultrasonic Attenuation

Waveform: Noise  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Noise Shape: White  
Secondary Source: None  
Measured 1 22/01/2023 21:22:11  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 500.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 1248000  
Averaging: Power  
Averages: 50  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:22:11.515)



# Sequence Report

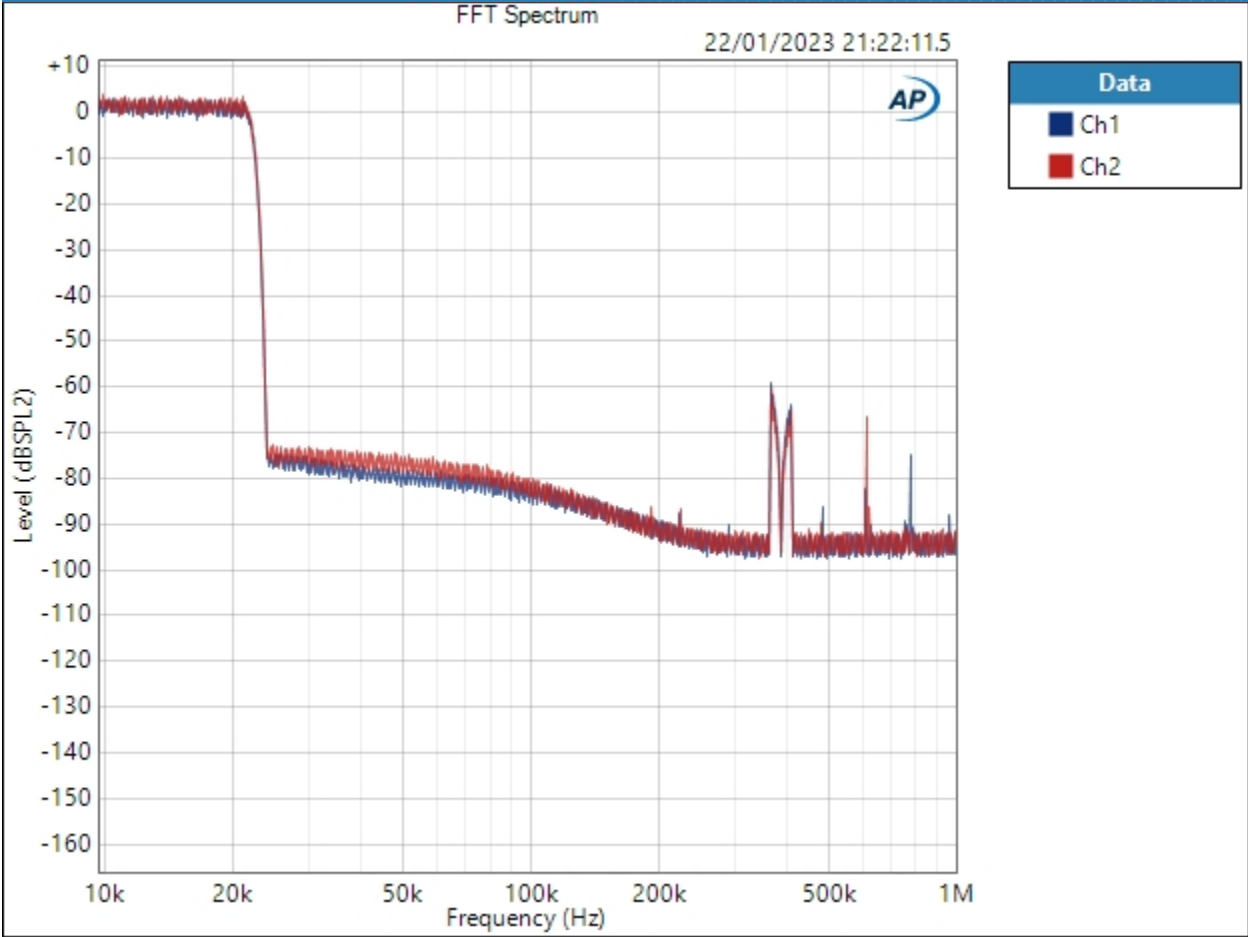

Result: PASSED



## Sequence Report



SIG 1.5 - Scope Views (44.1kHz) : 1Mhz RMS Noise Level

Waveform: None  
High-pass Filter: Elliptic  
High-pass Frequency: 20 Hz  
Low-pass Filter: Signal Path  
Weighting Filter: Signal Path  
Acquisition Time: 250.0 ms  
Delay Time: 300.0 ms

Noise Level (22/01/2023 21:22:13.341)

Ch1 55.69 uVrms

Ch2 55.25 uVrms



## Sequence Report



### SIG 2 - Main Measurements (44.1kHz) : Signal Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	44.1000 kHz
Output Latency:	Auto
Buffer Size:	1024
Clock Source:	Big Ben
Input 1:	Analog Balanced
Measure:	Auto
Channels:	Auto (2 Channels)
Ch1	Data from Ch1, Sensitivity = 0.00 dB, Gain = 0.00 dB
Ch2	Data from Ch2, Sensitivity = 0.00 dB, Gain = 0.00 dB
Input Bandwidth:	AC (<10 Hz) - AES17 (20 kHz)
Input EQ:	None
Termination:	200 kohm
High Performance Sine Analyzer:	Enabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	4.001 Vrms
dBrB:	4.001 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	3.000 dB
dB SPL1:	4.001 Vrms
dB SPL2:	4.001 Vrms
dB SPL1 Calibrator Level:	60.000 dB SPL
dB SPL2 Calibrator Level:	50.000 dB SPL



## Sequence Report



dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising

### SIG 2 - Main Measurements (44.1khz) : Output Level (Vrms)

Waveform:	Sine
Generator Level:	-0.000 dBFS
DC Offset:	0.000 D
Frequency:	1.00000 kHz
Low-pass Filter:	Signal Path

### RMS Level (22/01/2023 21:22:18.398)

Ch1	3.999 Vrms
Ch2	4.215 Vrms



## Sequence Report




### SIG 2 - Main Measurements (44.1kHz) : Frequency Response (Audible Band)

Start Frequency:	20.0000 Hz
Stop Frequency:	22.0500 kHz
Generator Level:	-0.000 dBFS
DC Offset:	0.000 D
EQ:	None
Pre-Sweep:	50.00 ms
Sweep:	5.000 s
Extend Acquisition By:	50.00 ms
Secondary Source:	None
Measured 1	22/01/2023 21:22:30

RMS Level (22/01/2023 21:22:30.008)



# Sequence Report AP

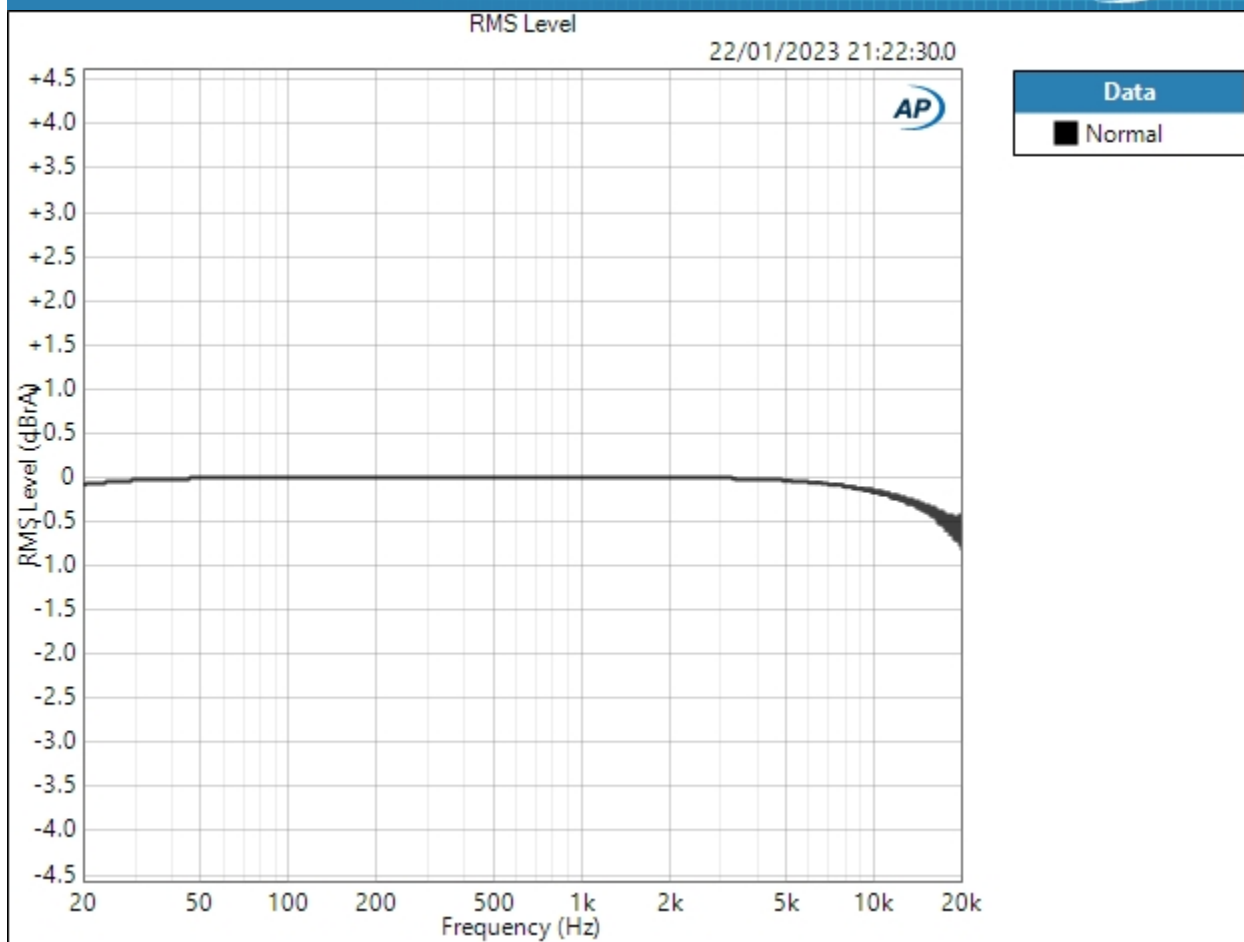

Result: ✔ PASSED

Deviation (20.0000 Hz - 4.00000 kHz) (22/01/2023 21:22:30.008)

Ch1  $\pm 0.046$  dB

Ch2  $\pm 0.048$  dB

Deviation (20.0000 Hz - 4.00000 kHz) Parameters

Min: 20.0000 Hz

Max: 4.00000 kHz

1/22/2023 9:43 PM





## Sequence Report



### SIG 2 - Main Measurements (44.1kHz) : 20hz-20khz Noise RMS Level

Waveform:	None
High-pass Filter:	Elliptic
High-pass Frequency:	20 Hz
Low-pass Filter:	Elliptic
Low-pass Frequency:	20 kHz
Weighting Filter:	Signal Path
Acquisition Time:	250.0 ms
Delay Time:	300.0 ms

### Noise Level (22/01/2023 21:22:34.203)

Ch1 11.83 uVrms  
Ch2 12.52 uVrms



## Sequence Report




### SIG 2 - Main Measurements (44.1kHz) : Idle Noise FFT

Waveform: Sine  
Generator Level:  $-\infty$  dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1: 22/01/2023 21:22:59  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 500.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 4  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:22:59.753)



# Sequence Report

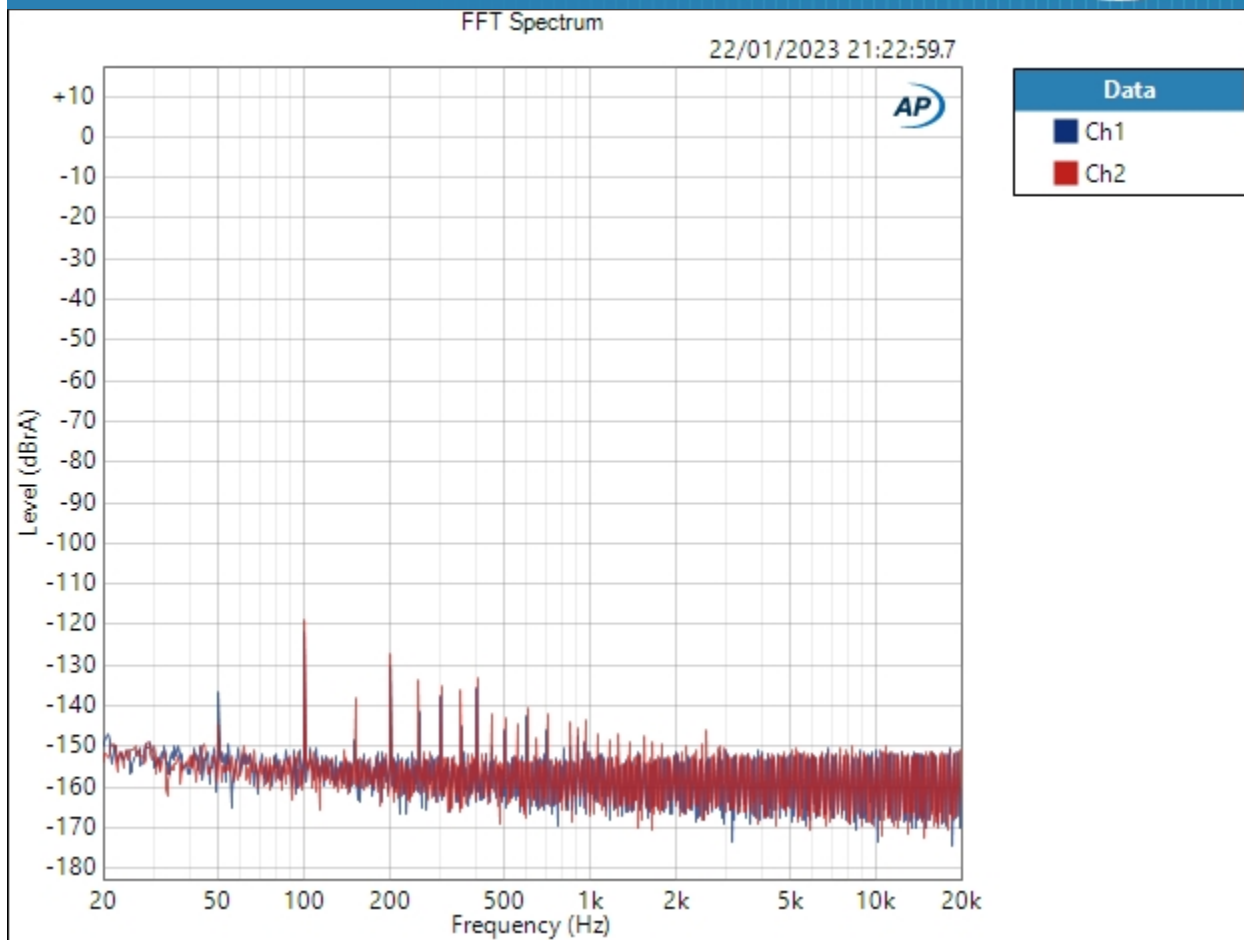

Result: PASSED



## Sequence Report




### SIG 2 - Main Measurements (44.1kHz) : 1kHz FFT (0dbfs)

Waveform: Sine  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 22/01/2023 21:23:25  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 500.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 4  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

### FFT Spectrum (22/01/2023 21:23:25.485)



# Sequence Report AP

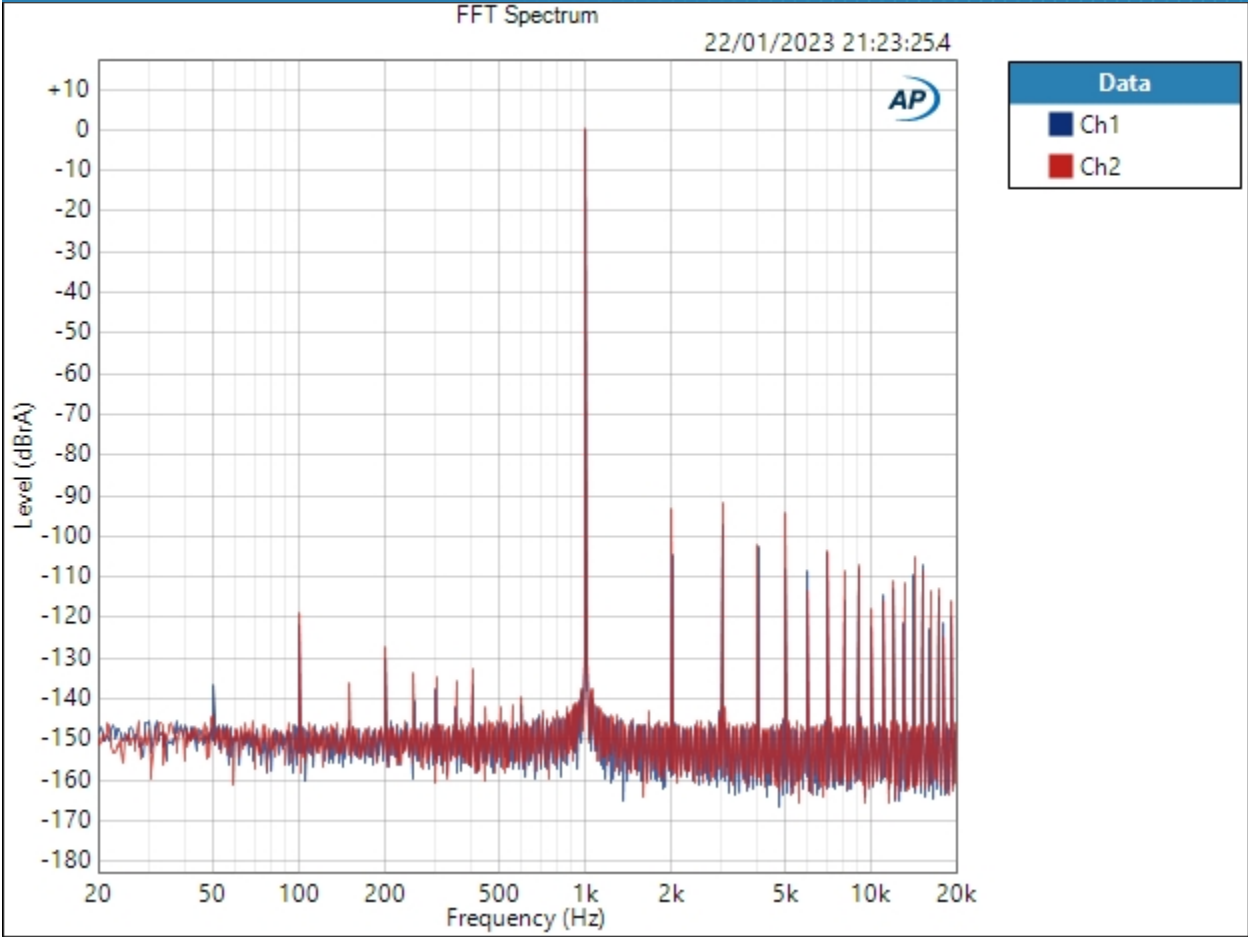

Result: ✔ PASSED



## Sequence Report




### SIG 2 - Main Measurements (44.1kHz) : 1kHz FFT (-3dbfs)

Waveform: Sine  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 22/01/2023 21:23:51  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 500.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 4  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

### FFT Spectrum (22/01/2023 21:23:51.399)



# Sequence Report

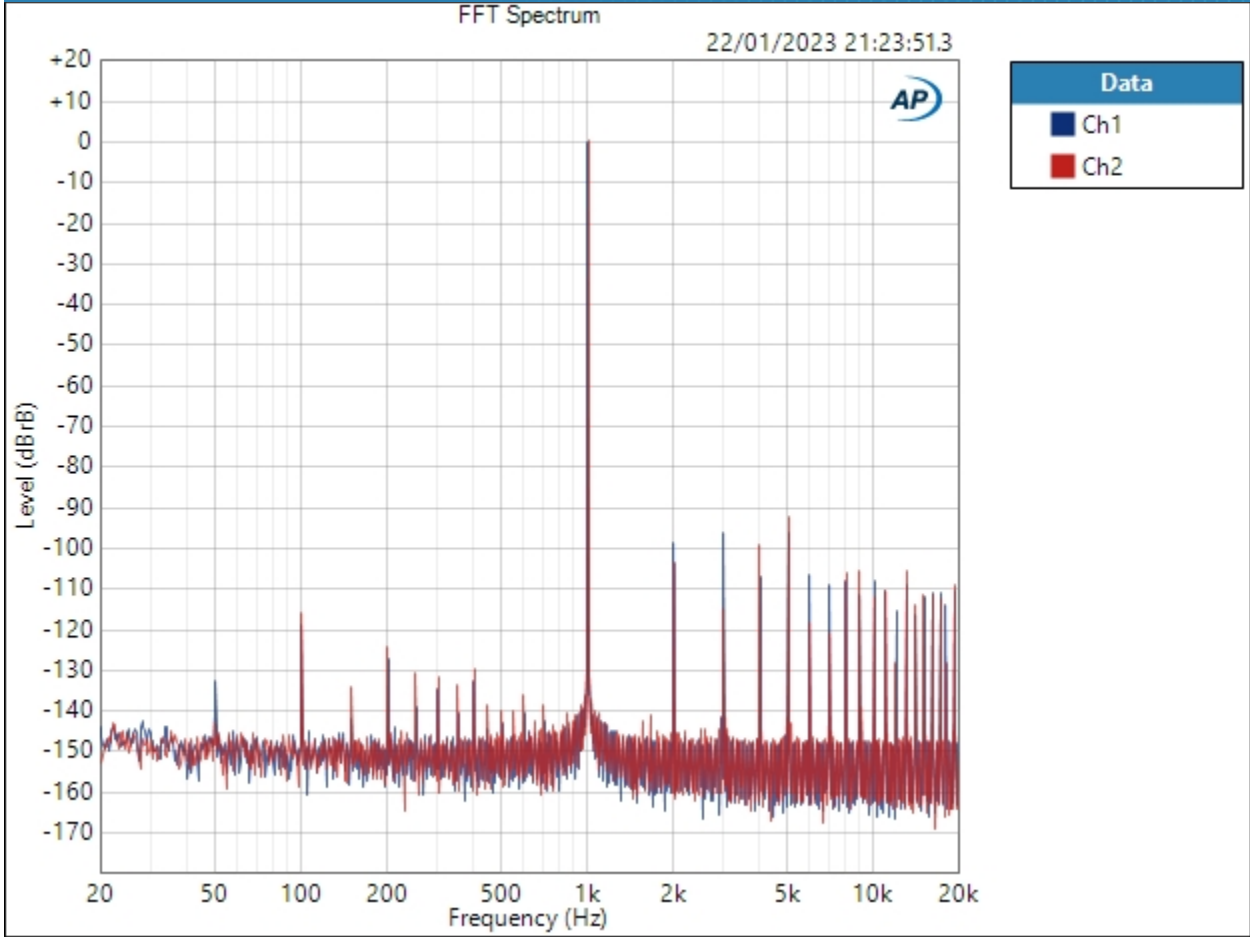

Result: PASSED



## Sequence Report



### SIG 2 - Main Measurements (44.1kHz) : 50kHz FFT (0dbfs)


Waveform: Sine  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 50.0000 Hz  
Secondary Source: None  
Measured 1 22/01/2023 21:24:17  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 500.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 4  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:24:17.169)





# Sequence Report AP

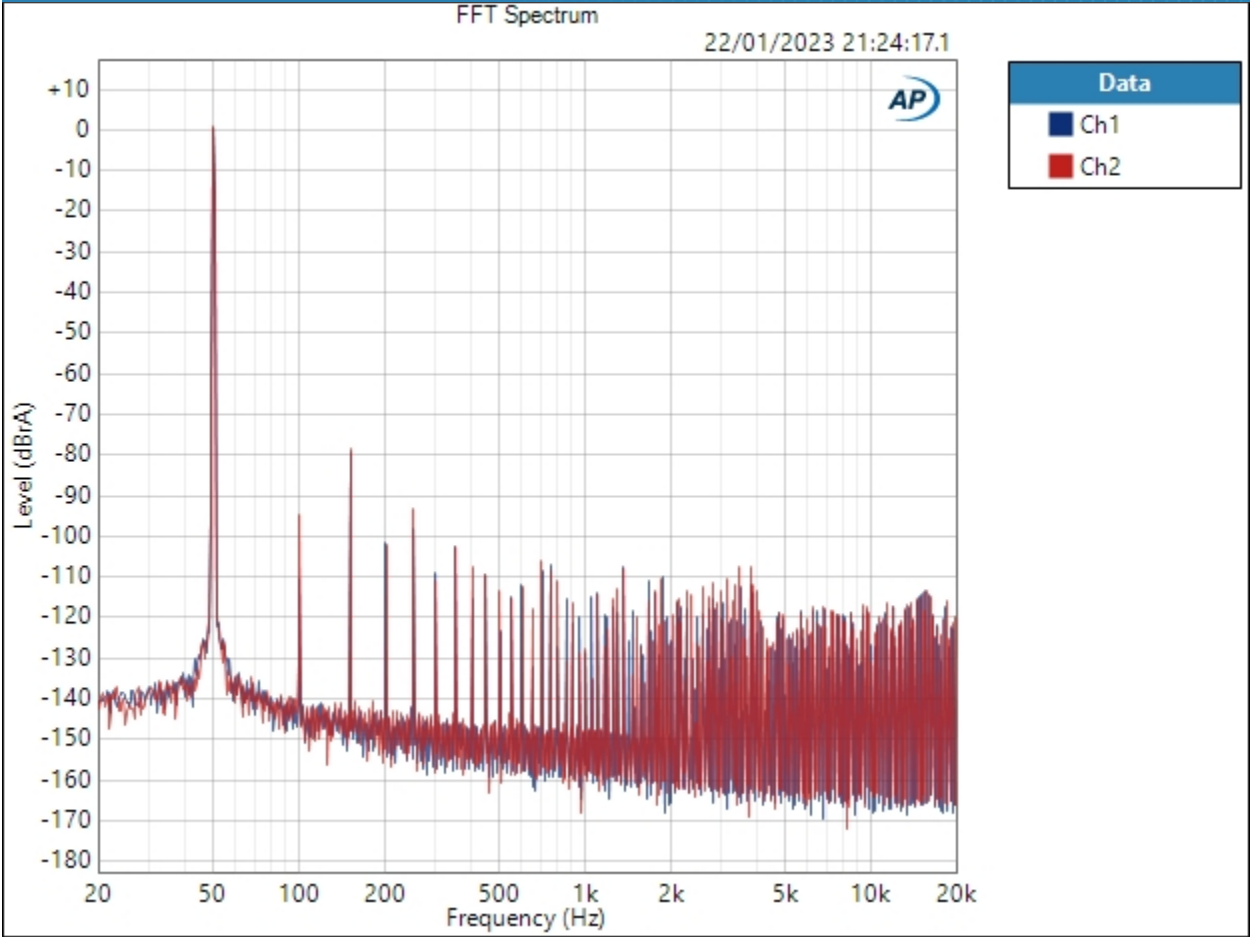

Result: ✔ PASSED



## Sequence Report




### SIG 2 - Main Measurements (44.1kHz) : 50hz FFT (-3dbfs)

Waveform: Sine  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Frequency: 50.0000 Hz  
Secondary Source: None  
Measured 1 22/01/2023 21:24:41  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 4  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

### FFT Spectrum (22/01/2023 21:24:41.927)



# Sequence Report

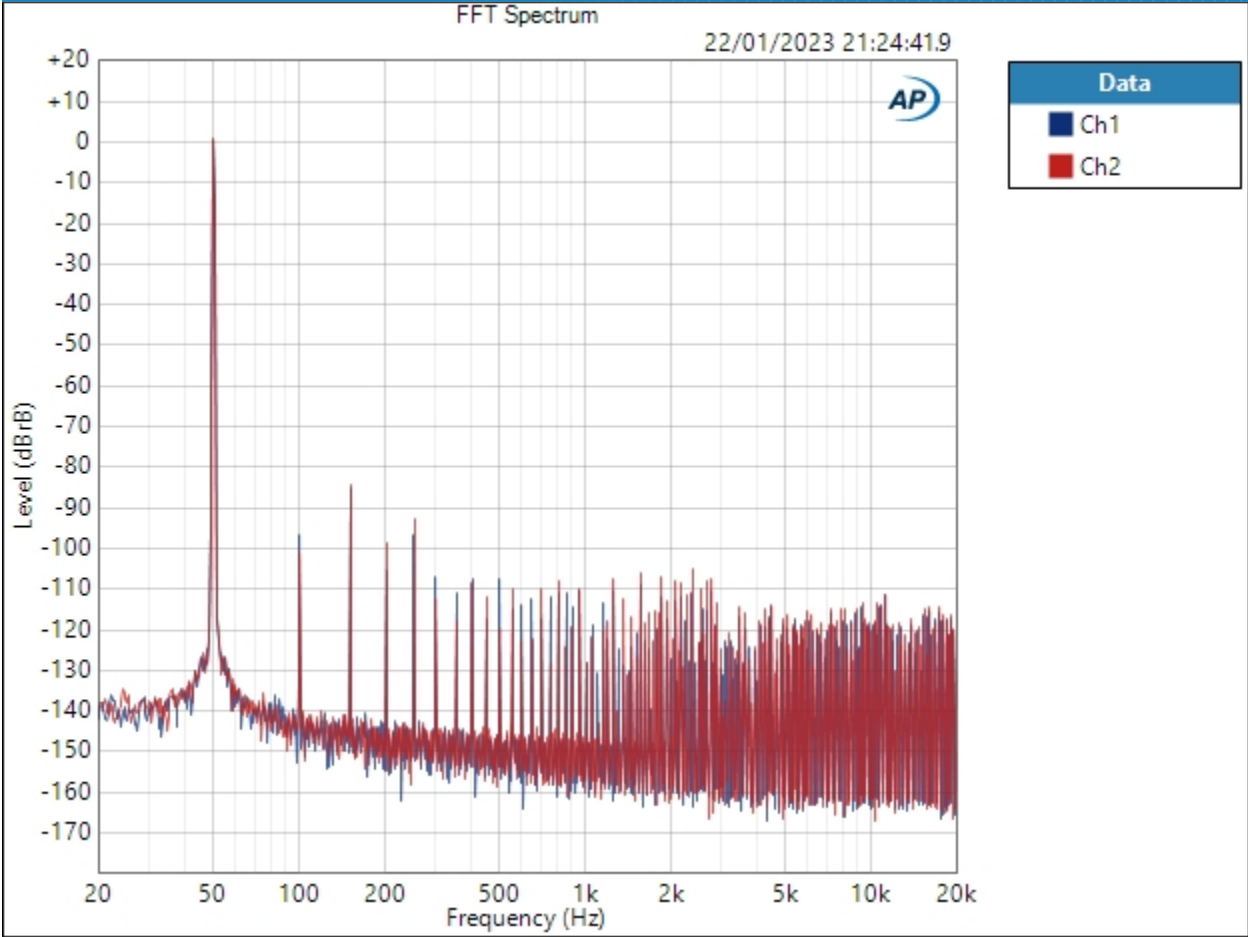

Result: PASSED



## Sequence Report



### SIG 2 - Main Measurements (44.1kHz) : Effective Number of Bits 0dbfs

Waveform: Sine (1 kHz)  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
High-pass Filter: Elliptic  
High-pass Frequency: 20 Hz  
Low-pass Filter: Elliptic  
Low-pass Frequency: 20 kHz  
Weighting Filter: Signal Path  
Notch Tuning Mode: Measured Frequency

ENOB (22/01/2023 21:24:44.983)

Ch1 15.3  
Ch2 14.3

### SIG 2 - Main Measurements (44.1kHz) : Effective Number of Bits -3dbfs

Waveform: Sine (1 kHz)  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
High-pass Filter: Elliptic  
High-pass Frequency: 20 Hz  
Low-pass Filter: Elliptic  
Low-pass Frequency: 20 kHz  
Weighting Filter: Signal Path  
Notch Tuning Mode: Measured Frequency

ENOB (22/01/2023 21:24:47.016)

Ch1 14.8  
Ch2 14.8



## Sequence Report



### SIG 2 - Main Measurements (44.1kHz) : THD+N 0dbfs

Waveform: Sine  
 Generator Level: -0.000 dBFS  
 DC Offset: 0.000 D  
 Frequency: 1.00000 kHz  
 High-pass Filter: Elliptic  
 High-pass Frequency: 20 Hz  
 Low-pass Filter: Elliptic  
 Low-pass Frequency: 20 kHz  
 Weighting Filter: Signal Path  
 Notch Tuning Mode: Measured Frequency

#### THD+N Ratio (22/01/2023 21:24:49.799)

Ch1 0.002096 %  
 Ch2 0.003971 %

#### THD+N Level (22/01/2023 21:24:49.799)

Ch1 -93.569 dBrA  
 Ch2 -87.565 dBrA

#### Noise Level (22/01/2023 21:24:49.799)

Ch1 15.51 uVrms  
 Ch2 17.19 uVrms

#### Distortion Product Ratio (22/01/2023 21:24:49.799)

Channel	F	H2	H3	H4	H5	H6	H7	H8	H9	H10
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch1	-0.00	-104.11	-97.25	-102.55	-108.30	-108.51	-104.48	-115.89	-108.18	-121.83
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch2	-0.00	-93.61	-92.06	-102.22	-95.23	-114.09	-104.59	-108.92	-107.54	-117.58

#### Distortion Product Ratio Parameters

Frequency Unit: Hz  
 Ratio Unit: dB  
 Channel: Ch1



## Sequence Report



### SIG 2 - Main Measurements (44.1kHz) : THD+N -3dbfs

Waveform: Sine  
 Generator Level: -3.000 dBFS  
 DC Offset: 0.000 D  
 Frequency: 1.00000 kHz  
 High-pass Filter: Elliptic  
 High-pass Frequency: 20 Hz  
 Low-pass Filter: Elliptic  
 Low-pass Frequency: 20 kHz  
 Weighting Filter: Signal Path  
 Notch Tuning Mode: Measured Frequency

#### THD+N Ratio (22/01/2023 21:24:53.133)

Ch1 0.002840 %  
 Ch2 0.002994 %

#### THD+N Level (22/01/2023 21:24:53.133)

Ch1 -90.932 dBrB  
 Ch2 -90.019 dBrB

#### Noise Level (22/01/2023 21:24:53.133)

Ch1 13.79 uVrms  
 Ch2 15.35 uVrms

#### Distortion Product Ratio (22/01/2023 21:24:53.133)

Channel	F	H2	H3	H4	H5	H6	H7	H8	H9	H10
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch1	-0.00	-98.41	-96.28	-106.82	-96.30	-106.90	-107.55	-108.35	-109.49	-108.16
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch2	-0.00	-104.15	-113.49	-99.31	-92.41	-116.35	-115.28	-106.83	-104.11	-112.21

#### Distortion Product Ratio Parameters

Frequency Unit: Hz  
 Ratio Unit: dB  
 Channel: Ch1



## Sequence Report




### SIG 2 - Main Measurements (44.1kHz) : THD+N/Frequency

Waveform:	Sine
Generator Level:	-3.000 dBFS
DC Offset:	0.000 D
EQ:	None
Start Frequency:	20.0000 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	64
High-pass Filter:	Elliptic
High-pass Frequency:	20 Hz
Low-pass Filter:	Signal Path
Weighting Filter:	Signal Path
Phase Ref Channel:	Ch1
Measured 1	22/01/2023 21:26:08

THD+N Ratio (22/01/2023 21:26:08.202)



# Sequence Report

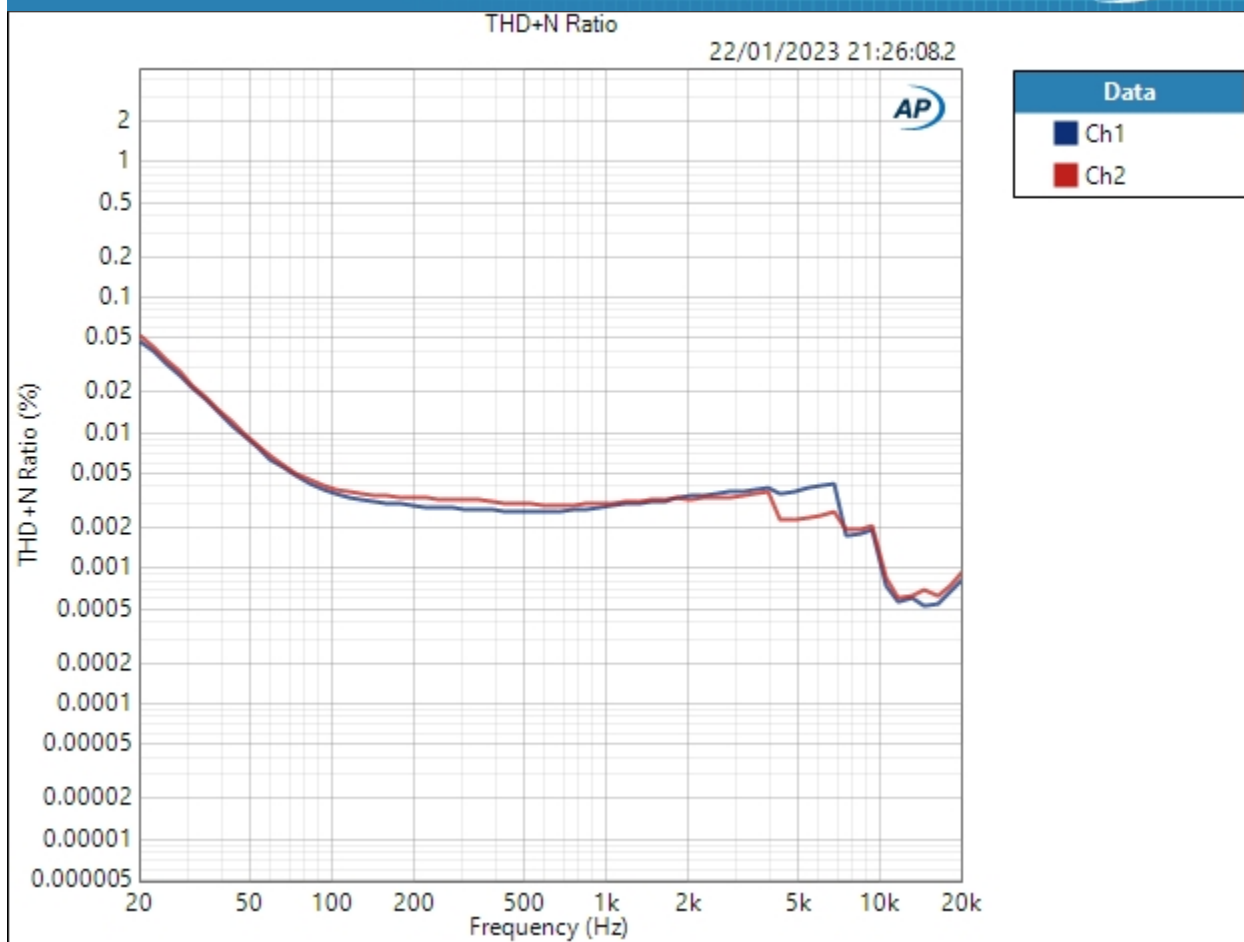

Result: ✔ PASSED





## Sequence Report



### SIG 2 - Main Measurements (44.1kHz) : Dynamic Range - AES17

Waveform: Sine  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 0.99700 kHz  
Level Ratio: -60.000 dB  
High-pass Filter: Signal Path  
Low-pass Filter: Elliptic  
Low-pass Frequency: 20 kHz  
Weighting Filter: CCIR-2k

### Dynamic Range - AES17 (22/01/2023 21:26:15.831)

Ch1 99.632 dB  
Ch2 106.775 dB

### SIG 2 - Main Measurements (44.1kHz) : Signal to Noise Ratio

Waveform: Sine  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
High-pass Filter: Elliptic  
High-pass Frequency: 20 Hz  
Low-pass Filter: Elliptic  
Low-pass Frequency: 20 kHz  
Weighting Filter: Signal Path

### Signal to Noise Ratio (22/01/2023 21:26:19.179)

Ch1 110.512 dB  
Ch2 110.512 dB



## Sequence Report



### SIG 2 - Main Measurements (44.1kHz) : IMD ( SMPTE )

IMD Type: SMPTE  
Waveform: IMD  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency 1: 60.0000 Hz  
Frequency 2: 7.00000 kHz  
Frequency Ratio: 4:1  
IMD Split: False

### SMPTE Ratio (22/01/2023 21:26:21.091)

Ch1 -81.008 dB

Ch2 -77.210 dB

### SMPTE Distortion Product Ratio (22/01/2023 21:26:21.091)

Channel	f1	d5	d4	d3	d2	f2	d2	d3	d4	d5
	60.00	6.760k	6.820k	6.880k	6.940k	7.000k	7.060k	7.120k	7.180k	7.240k
Ch1	12.11	-100.11	-93.99	-88.42	-101.87	0.00	-102.83	-86.36	-93.68	-100.17
	60.00	6.760k	6.820k	6.880k	6.940k	7.000k	7.060k	7.120k	7.180k	7.240k
Ch2	12.11	-88.32	-94.90	-88.58	-91.41	0.00	-91.78	-86.65	-94.37	-88.52

### SMPTE Distortion Product Ratio Parameters

Frequency Unit: Hz  
Ratio Unit: dB  
Channel: Ch1



## Sequence Report




SIG 2 - Main Measurements (44.1kHz) : 50hz/7khz IMD SMPTE FFT

Waveform: Sine, Dual  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 50.0000 Hz  
Frequency B: 7.00000 kHz  
IMD Split: No  
FB:FA Ratio: 1.000 x/y  
Secondary Source: None  
Measured 1 22/01/2023 21:26:46  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 500.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 4  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:26:46.800)



# Sequence Report

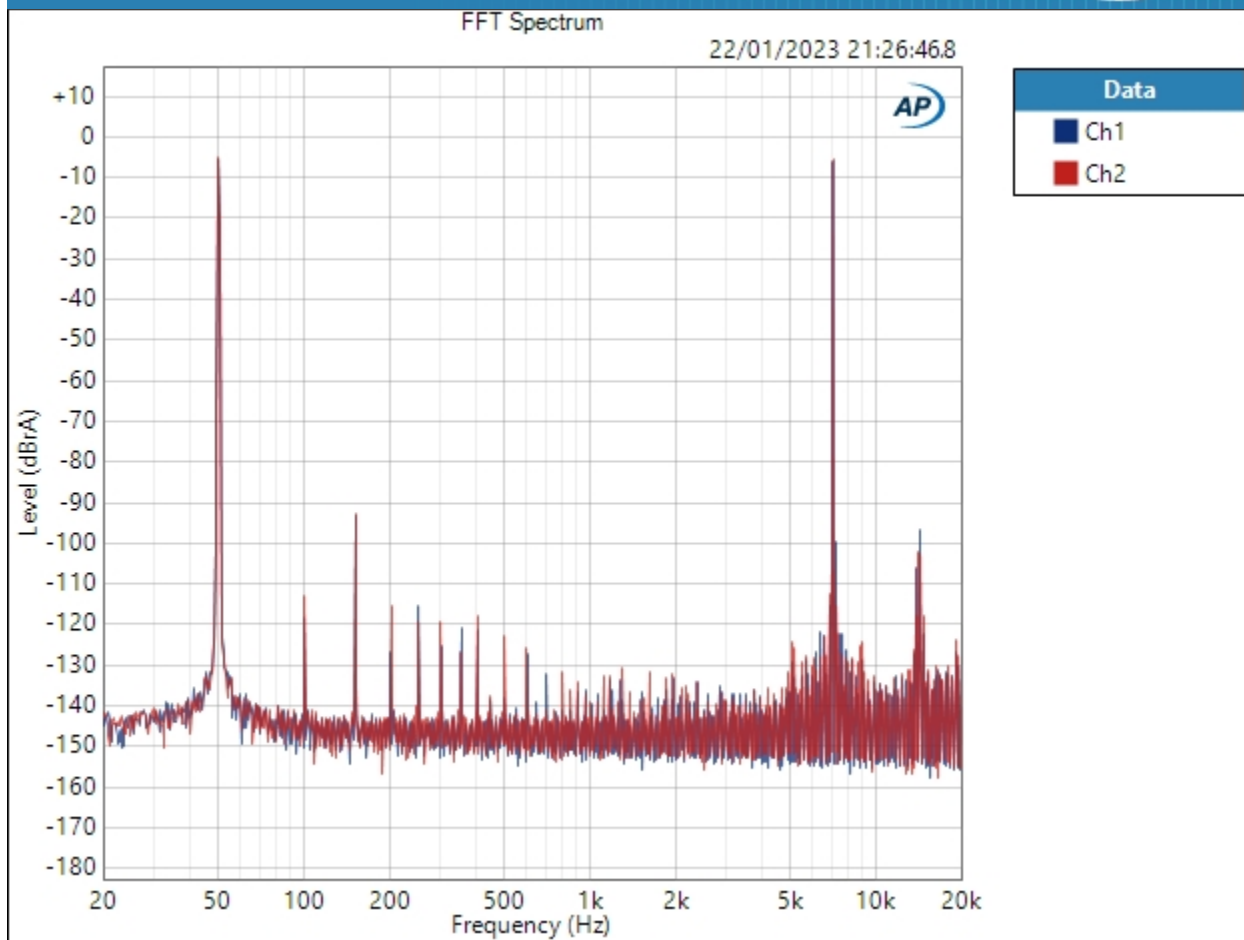

Result: PASSED



## Sequence Report




### SIG 2 - Main Measurements (44.1kHz) : IMD Level Sweep ( SMPTE )

IMD Type:	SMPTE
Frequency 1:	60.0000 Hz
Frequency 2:	7.00000 kHz
Frequency Ratio:	4:1
IMD Split:	False
Start Level:	-60.000 dBFS
Stop Level:	-0.000 dBFS
Step Type:	Linear
Number of Points:	124
Step Size:	+0.488 dBFS
Measured 1	22/01/2023 21:28:50

SMPTE Ratio (22/01/2023 21:28:50.149)



## Sequence Report

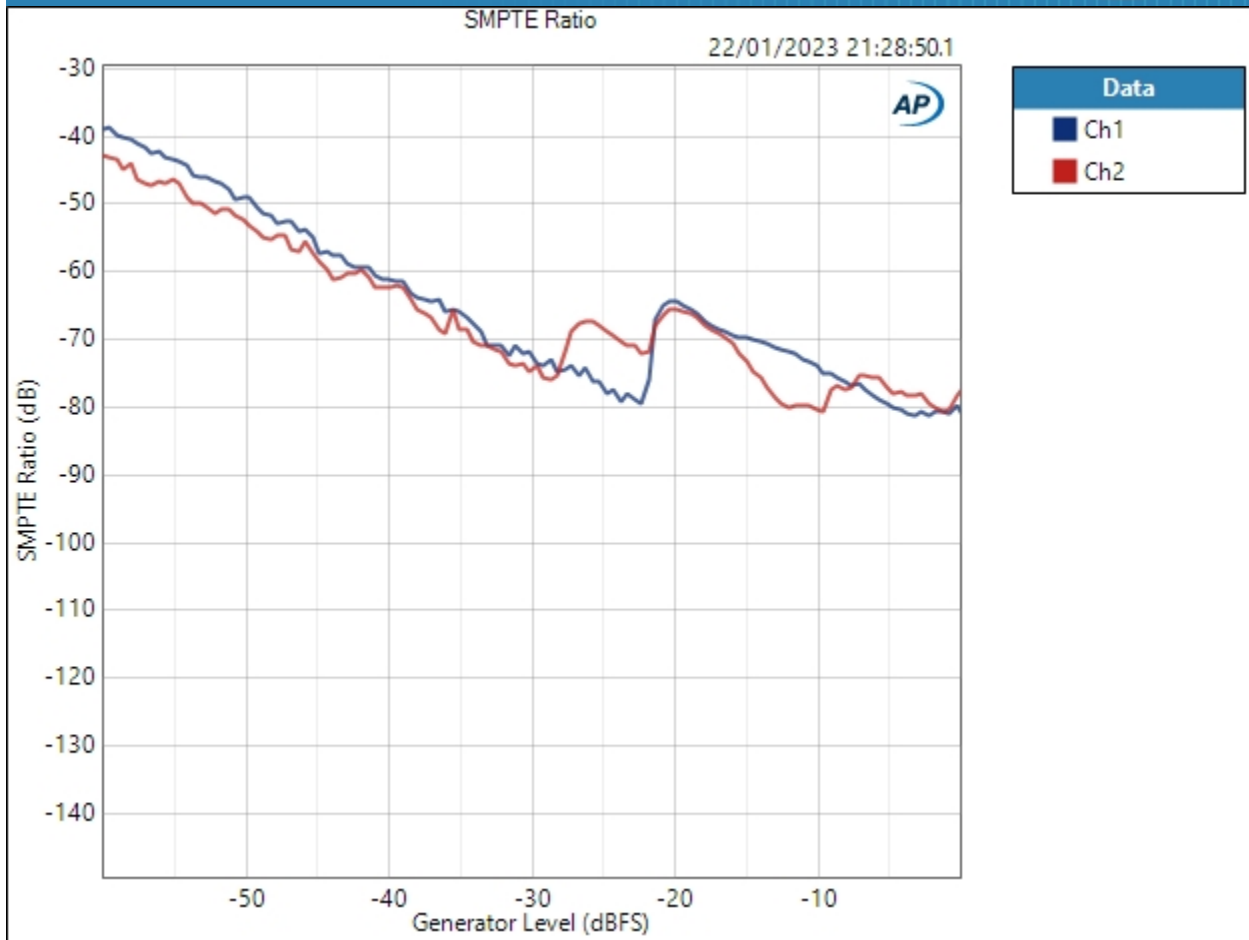


Result: PASSED

SMPTE Ratio vs Measured Level (22/01/2023 21:28:50.149)



## Sequence Report

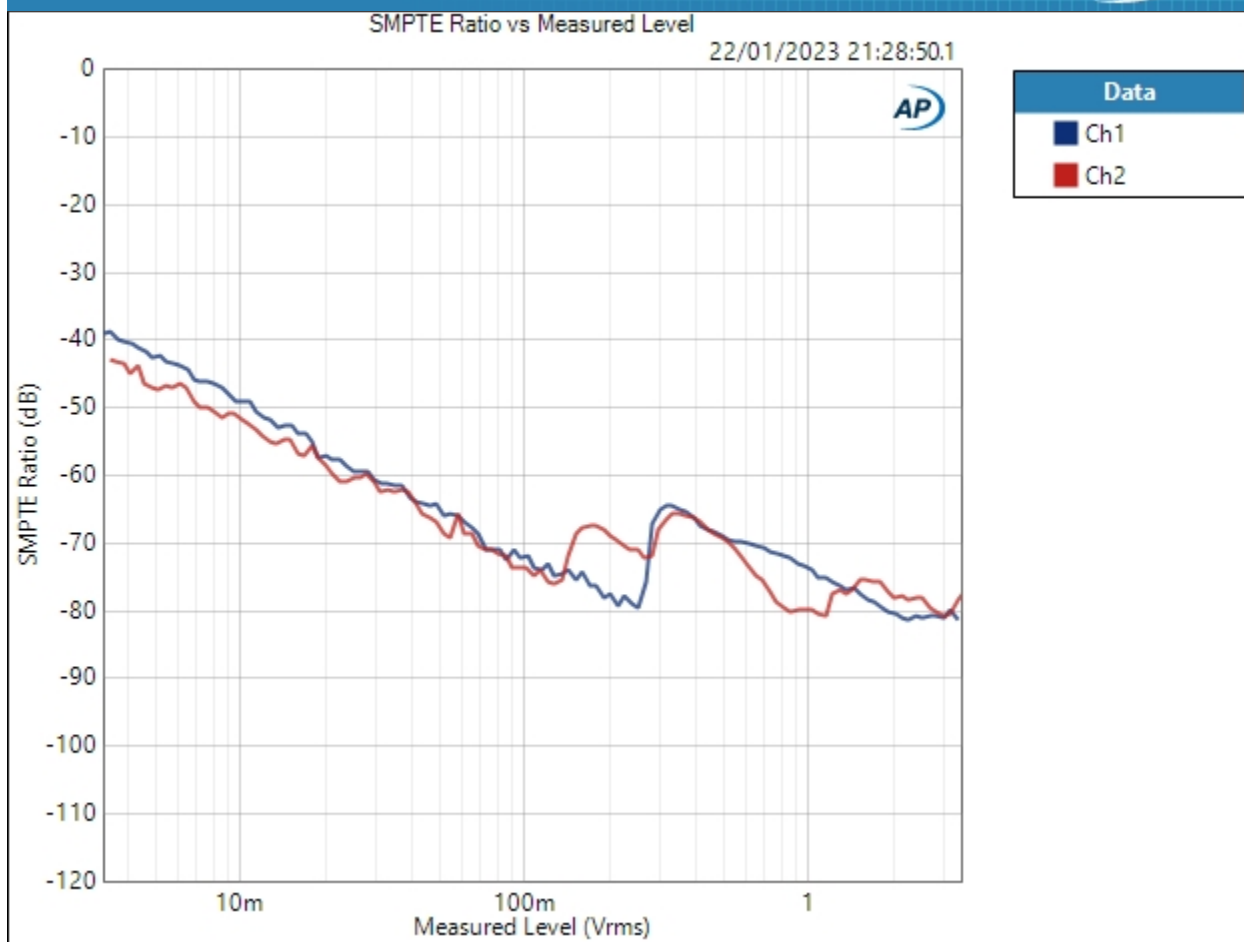

Result: PASSED



## Sequence Report



### SIG 2 - Main Measurements (44.1kHz) : Linearity


Waveform:	Sine
Frequency:	1.00000 kHz
Start Level:	-120.000 dBFS
Stop Level:	-0.000 dBFS
Step Type:	Linear
Number of Points:	124
Step Size:	+0.976 dBFS
Offset:	0.000 D
Selectivity:	1/24 octave
Bandpass Tuning Mode:	Generator Frequency
Measured 1	22/01/2023 21:31:59

Linearity (-20.000 dBFS) (22/01/2023 21:31:59.127)





## Sequence Report

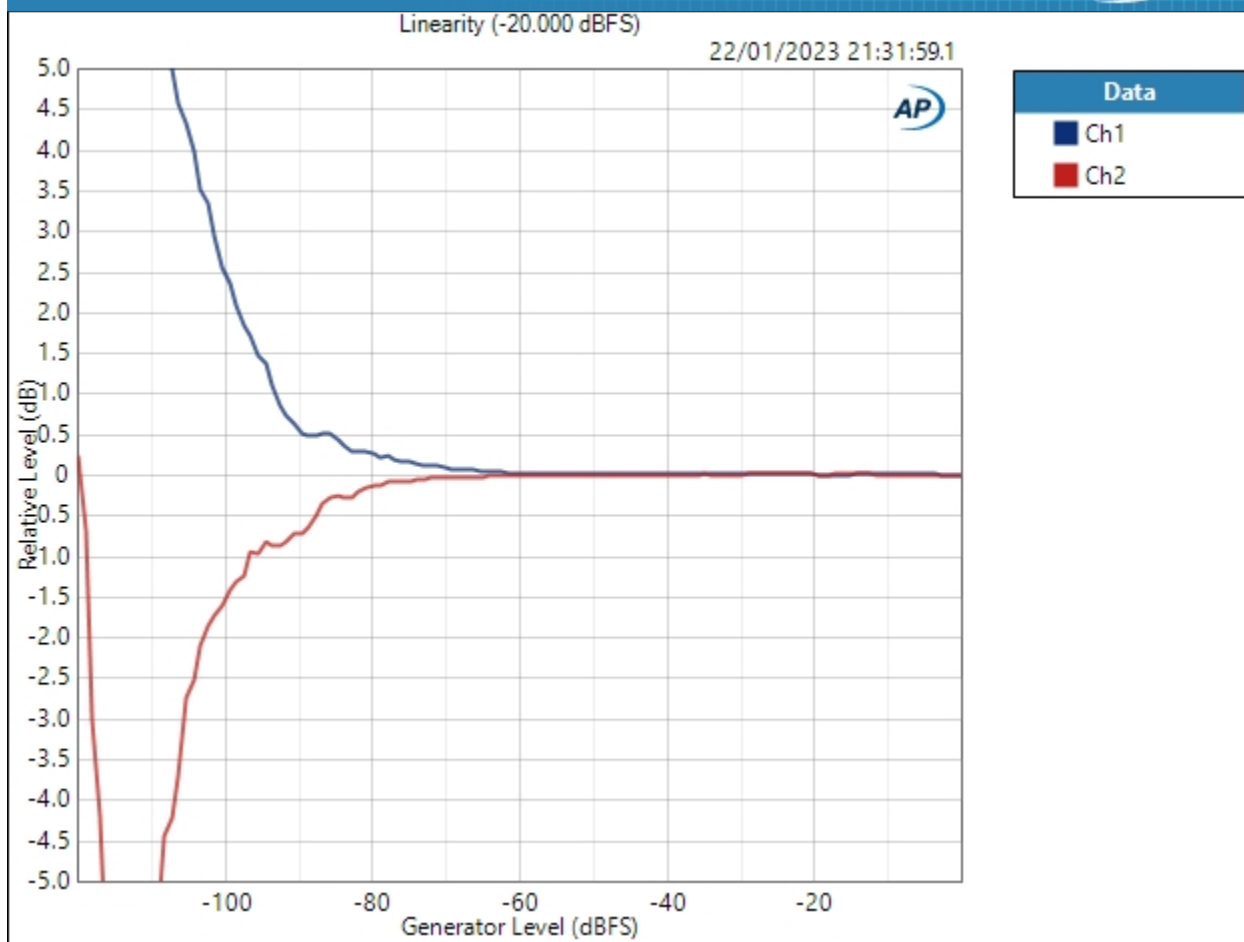

### Linearity (-20.000 dBFS) Parameters

Mode: Normalized at Reference

Relative Level: -20.000 dBFS

Result: PASSED



## Sequence Report




### SIG 2 - Main Measurements (44.1kHz) : Linearity (No Bandpass)

Waveform:	Sine
Frequency:	1.00000 kHz
Start Level:	-120.000 dBFS
Stop Level:	-0.000 dBFS
Step Type:	Linear
Number of Points:	124
Step Size:	+0.976 dBFS
Offset:	0.000 D
High-pass Filter:	Elliptic
High-pass Frequency:	20 Hz
Low-pass Filter:	Elliptic
Low-pass Frequency:	20 kHz
Weighting Filter:	Signal Path
Notch Tuning Mode:	Generator Frequency
Measured 1	22/01/2023 21:34:21

Linearity (-20.000 dBFS) (22/01/2023 21:34:21.821)



## Sequence Report

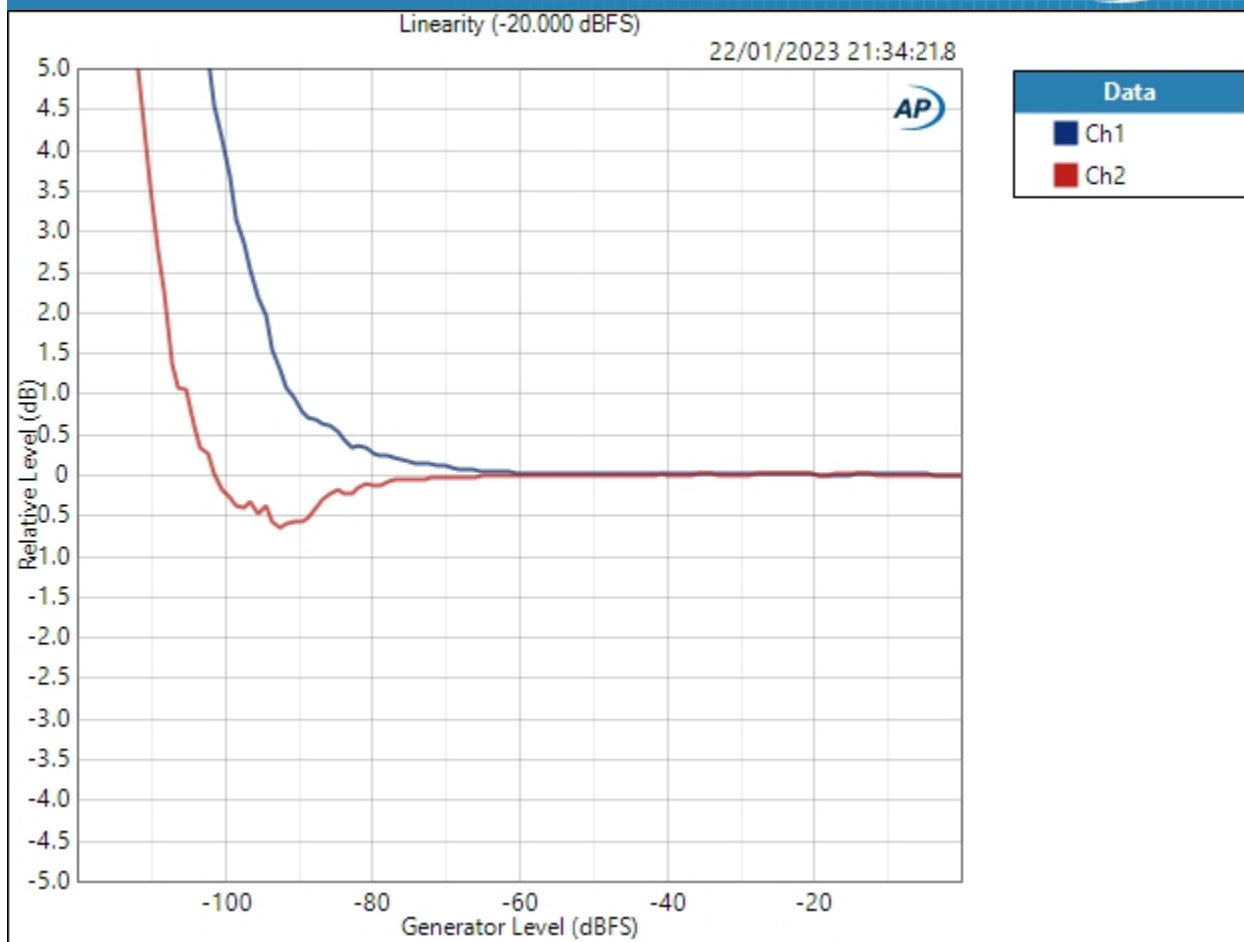

### Linearity (-20.000 dBFS) Parameters

Mode: Normalized at Reference


Relative Level: -20.000 dBFS

Result: ✔ PASSED

THD+N Ratio (22/01/2023 21:34:21.821)



# Sequence Report

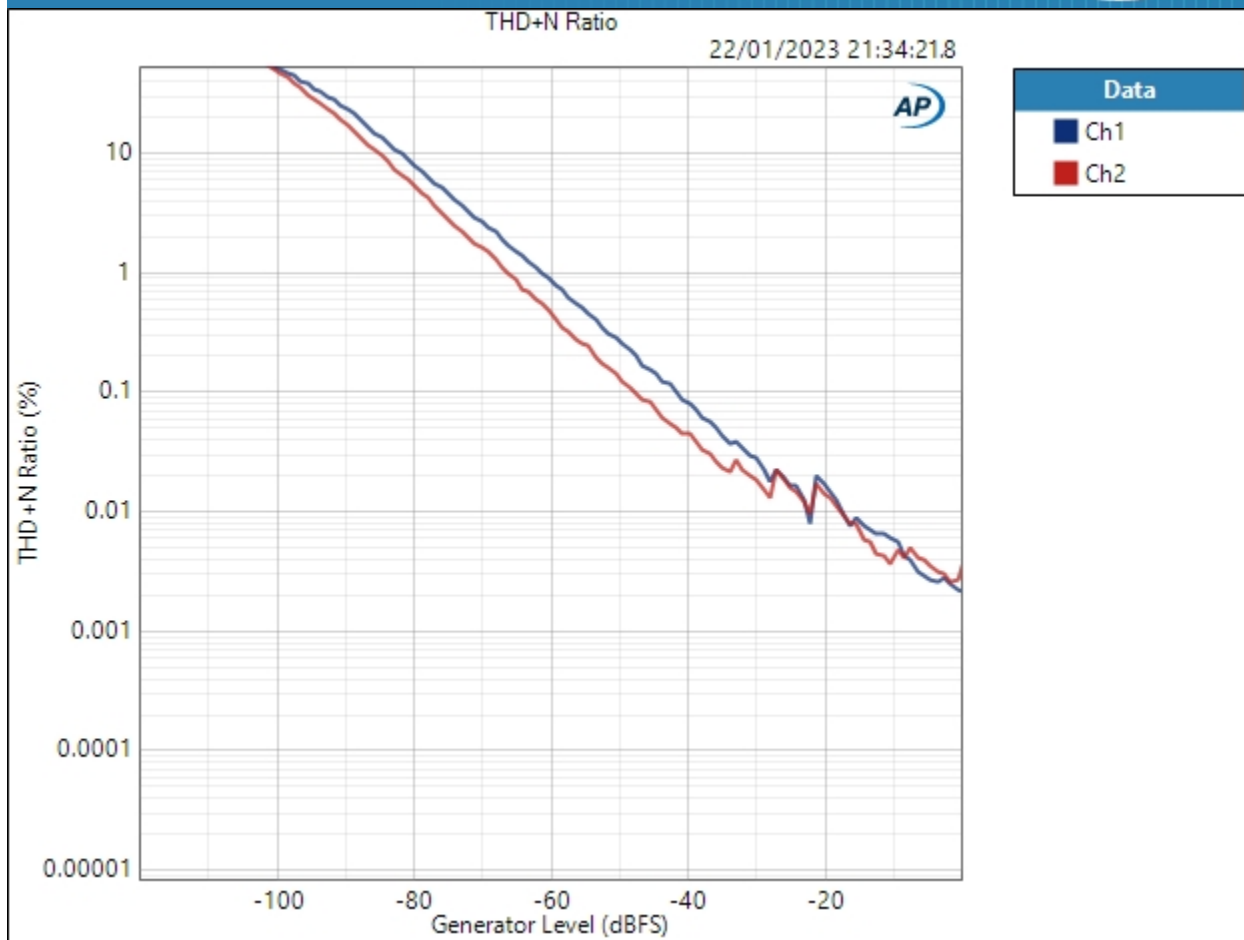


Result: PASSED

SINAD (22/01/2023 21:34:21.821)



## Sequence Report

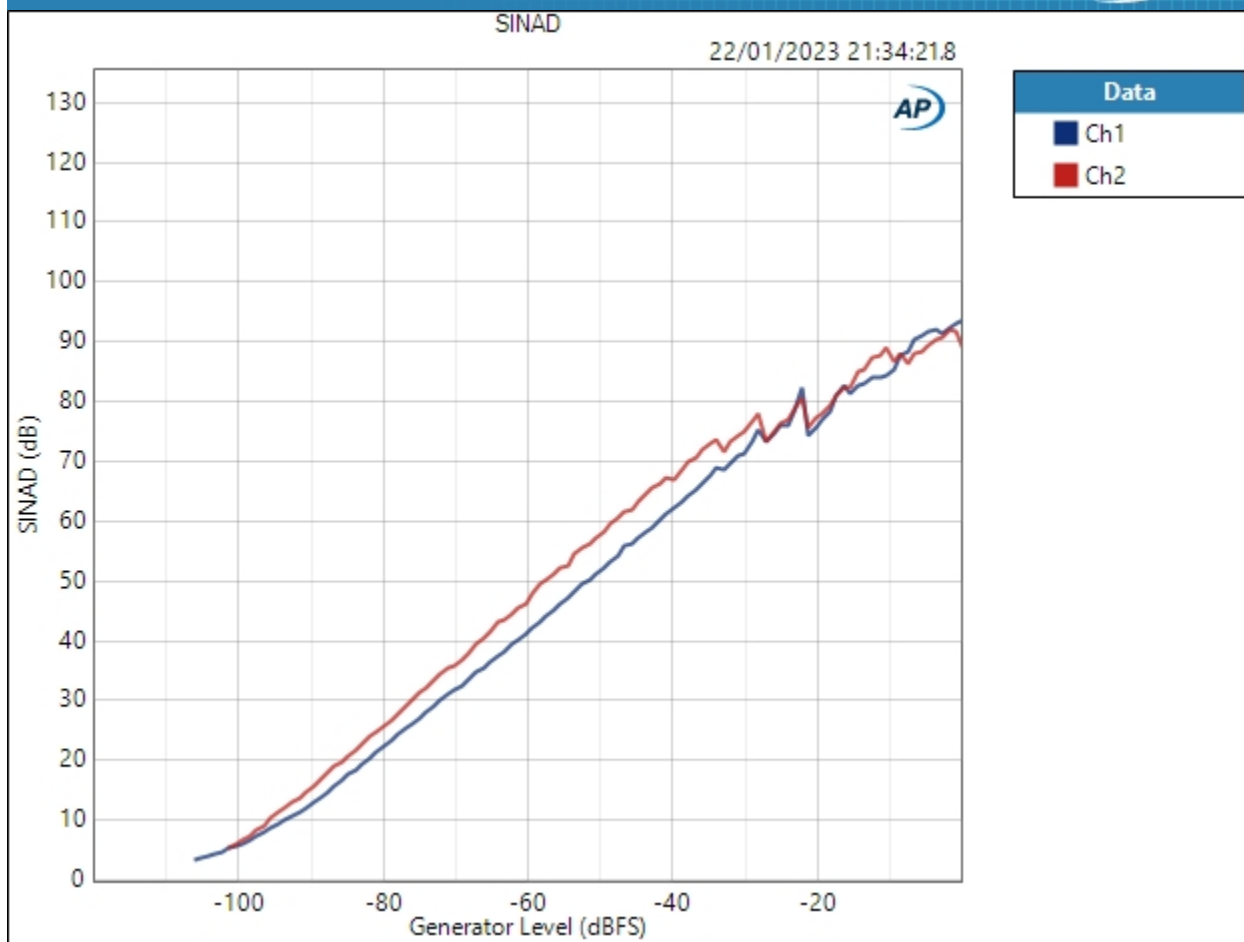


Result: PASSED

SINAD vs Measured Level (22/01/2023 21:34:21.821)



## Sequence Report

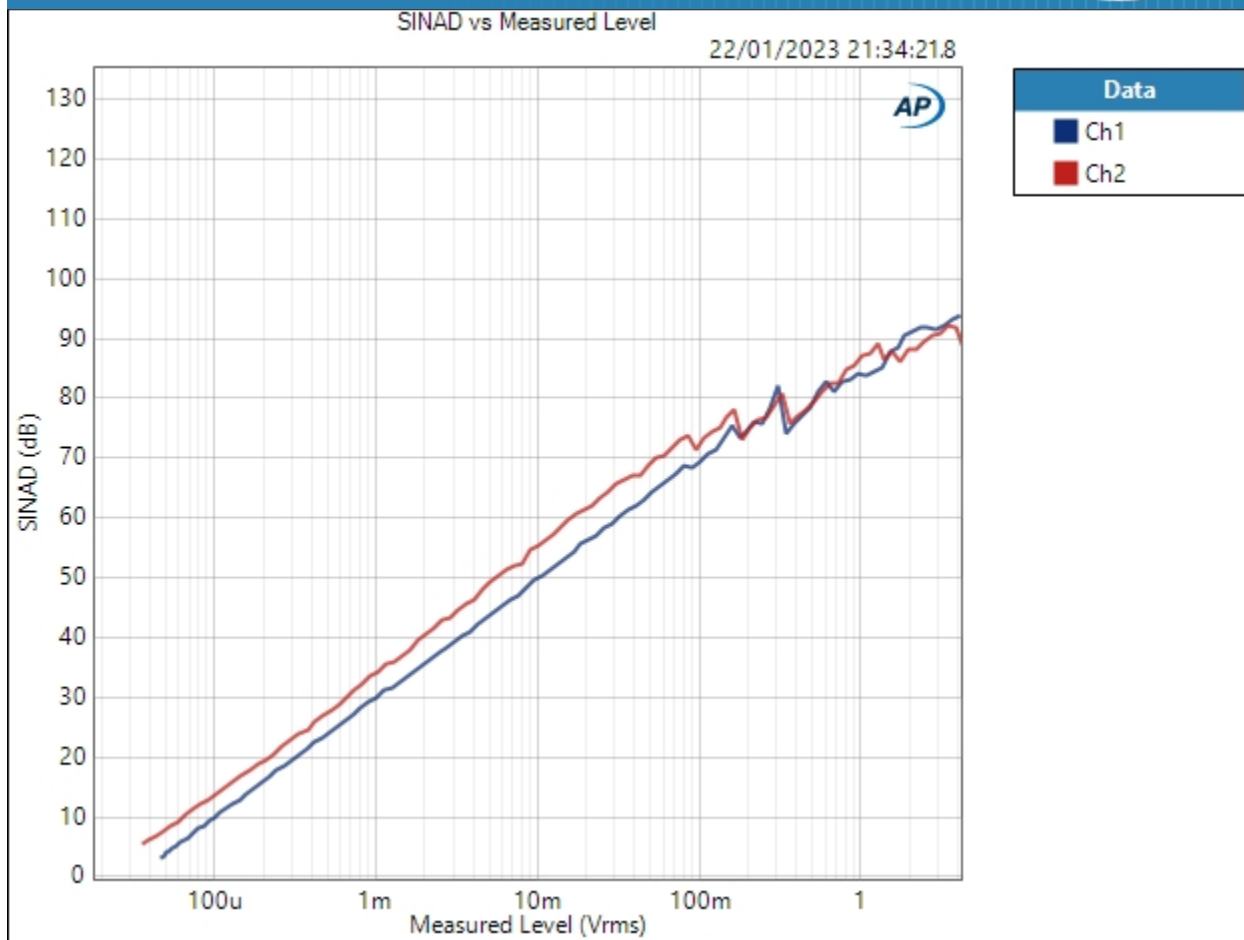

Result: PASSED



## Sequence Report



SIG 2 - Main Measurements (44.1kHz) : Crosstalk Sweep, One Channel Driven

Generator Level: -0.000 dBFS

DC Offset: 0.000 D

Start Frequency: 20.0000 kHz


Stop Frequency: 20.0000 Hz

Step Type: Logarithmic

Number of Points: 32

Measured 1 22/01/2023 21:35:56

Crosstalk (22/01/2023 21:35:56.811)

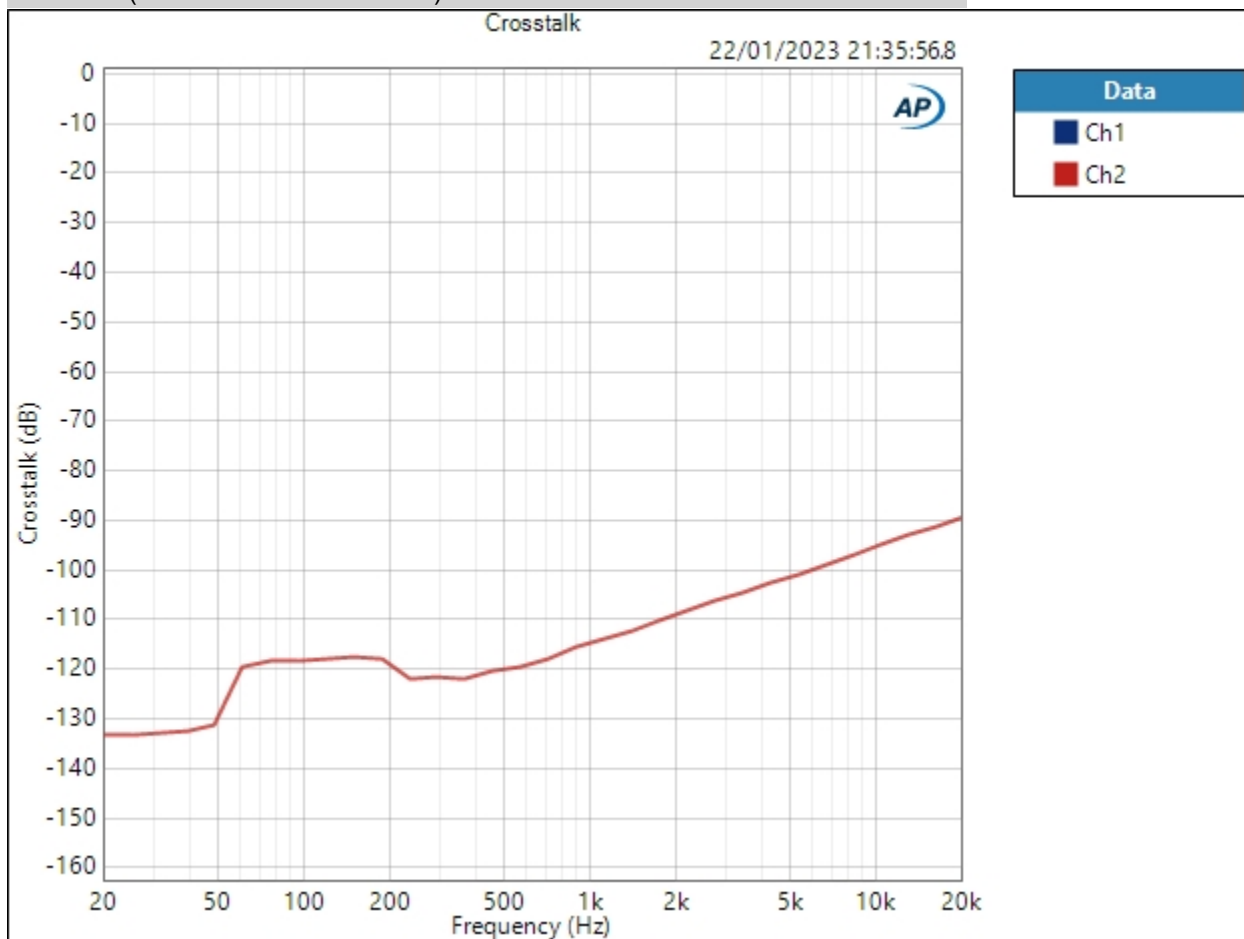



## Sequence Report



### Crosstalk Parameters

Source: Ch1

Result:  PASSED

### SIG 2 - Main Measurements (44.1khz) : DC Offset (active)

Waveform: Sine  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Delay Time: 400.0 ms  
Acquisition Time: 333.0 ms

### DC Level (22/01/2023 21:37:45.568)

Ch1 -223.4 uV  
Ch2 5.053 mV

### SIG 2 - Main Measurements (44.1khz) : DC Offset (idle)

Waveform: Sine  
Generator Level:  $-\infty$  dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Delay Time: 100.0 ms  
Acquisition Time: 333.0 ms

### DC Level (22/01/2023 21:37:51.868)

Ch1 -449.7 uV  
Ch2 4.910 mV





## Sequence Report



### SIG 3 - 44.1kHz Jitter : Signap Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	44.1000 kHz
Output Latency:	Auto
Buffer Size:	1024
Clock Source:	Big Ben
Input 1:	Analog Balanced
Measure:	Auto
Channels:	Auto (2 Channels)
Ch1	Data from Ch1, Sensitivity = 0.00 dB, Gain = 0.00 dB
Ch2	Data from Ch2, Sensitivity = 0.00 dB, Gain = 0.00 dB
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Input EQ:	None
Termination:	200 kohm
High Performance Sine Analyzer:	Disabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	4.001 Vrms
dBrB:	4.001 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	3.000 dB
dB SPL1:	4.001 Vrms
dB SPL2:	4.001 Vrms
dB SPL1 Calibrator Level:	60.000 dB SPL
dB SPL2 Calibrator Level:	50.000 dB SPL



## Sequence Report



dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising



## Sequence Report



SIG 3 - 44.1kHz Jitter : 44.1kHz J-Test (Jitter)

Waveform: J-test\_44k\_PCM24\_LR.wav

Bit Exact: True

Start Offset (sec): 0.000 s

Secondary Source: None

Measured 1 22/01/2023 21:38:55

Acquisition Type: Auto

Trigger: Free Run

Delay Time: 500.0 ms

Input Bandwidth: Use Signal Path

FFT Length: 1248000

Averaging: Power

Averages: 8

Window: AP-Equiripple


Record Acquisition: False

Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:38:55.455)



# Sequence Report

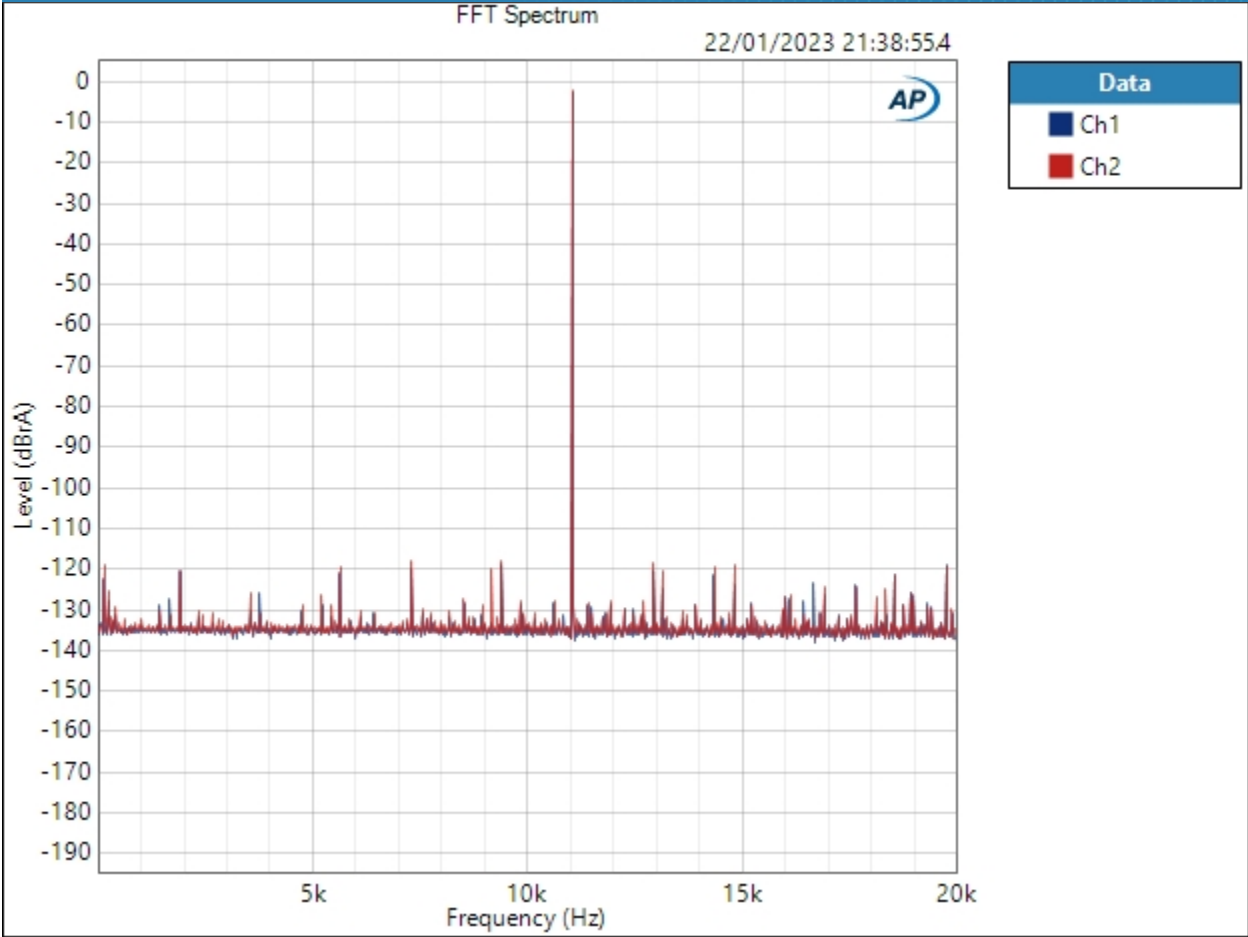

Result: PASSED



## Sequence Report



### SIG 4 - 48khz Jitter : Signap Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	48.0000 kHz
Output Latency:	Auto
Buffer Size:	2048
Clock Source:	Big Ben
Input 1:	Analog Balanced
Measure:	Auto
Channels:	Auto (2 Channels)
Ch1	Data from Ch1, Sensitivity = 0.00 dB, Gain = 0.00 dB
Ch2	Data from Ch2, Sensitivity = 0.00 dB, Gain = 0.00 dB
Input Bandwidth:	AC (<10 Hz) - AES17 (20 kHz)
Input EQ:	None
Termination:	200 kohm
High Performance Sine Analyzer:	Disabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	4.001 Vrms
dBrB:	4.001 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	3.000 dB
dB SPL1:	4.001 Vrms
dB SPL2:	4.001 Vrms
dB SPL1 Calibrator Level:	60.000 dB SPL
dB SPL2 Calibrator Level:	50.000 dB SPL



## Sequence Report



dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising



## Sequence Report



SIG 4 - 48khz Jitter : 48khz J-Test (Jitter)

Waveform: J-test\_48k\_PCM24\_LR.wav

Bit Exact: True

Start Offset (sec): 0.000 s

Secondary Source: None

Measured 1 22/01/2023 21:40:22

Acquisition Type: Auto

Trigger: Free Run

Delay Time: 500.0 ms

Input Bandwidth: Use Signal Path

FFT Length: 1248000

Averaging: Power

Averages: 3

Window: AP-Equiripple


Record Acquisition: False

Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:40:22.611)



## Sequence Report

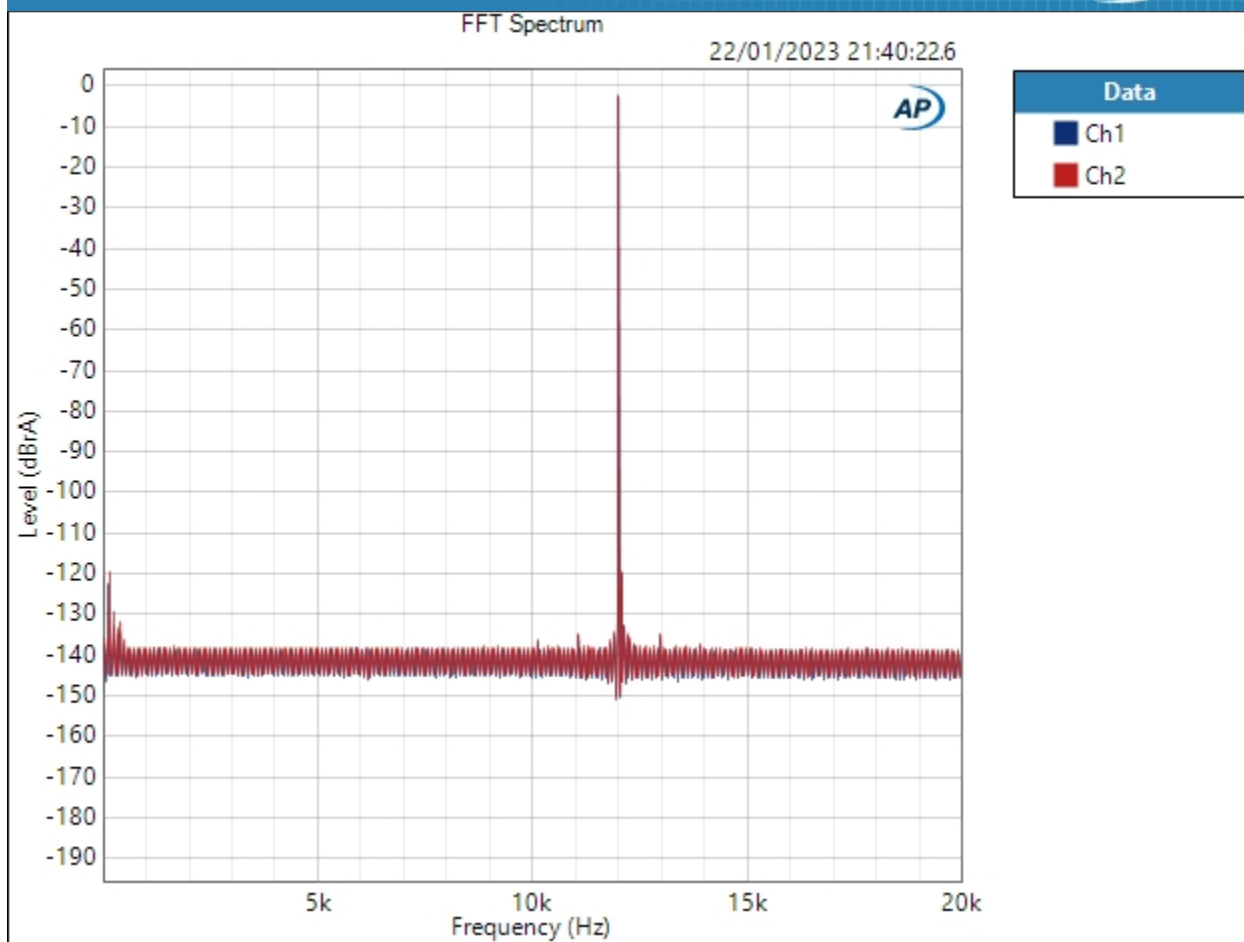

Result: ✔ PASSED





## Sequence Report



### SIG 5 - Bandwidth (192kHz) : Signal Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	192.000 kHz
Output Latency:	Auto
Buffer Size:	2048
Clock Source:	Big Ben
Input 1:	Analog Balanced
Measure:	Auto
Channels:	Custom (2 Channels)
Ch1	Data from Ch1, Sensitivity = 0.00 dB, Gain = 0.00 dB
Ch2	Data from Ch2, Sensitivity = 0.00 dB, Gain = 0.00 dB
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Input EQ:	None
Termination:	200 kohm
High Performance Sine Analyzer:	Enabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	4.001 Vrms
dBrB:	4.001 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	3.000 dB
dB SPL1:	4.001 Vrms
dB SPL2:	4.001 Vrms
dB SPL1 Calibrator Level:	60.000 dB SPL
dB SPL2 Calibrator Level:	50.000 dB SPL



## Sequence Report



dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising



## Sequence Report



SIG 5 - Bandwidth (192khz) : 90khz Bandwidth

Start Frequency: 20.0000 Hz

Stop Frequency: 90.0000 kHz

Generator Level: -3.000 dBFS

DC Offset: 0.000 D

EQ: None

Pre-Sweep: 500.0 ms

Sweep: 5.000 s

Extend Acquisition By: 500.0 ms


Secondary Source: None

Measured 1 22/01/2023 21:40:39

RMS Level (22/01/2023 21:40:39.922)



# Sequence Report

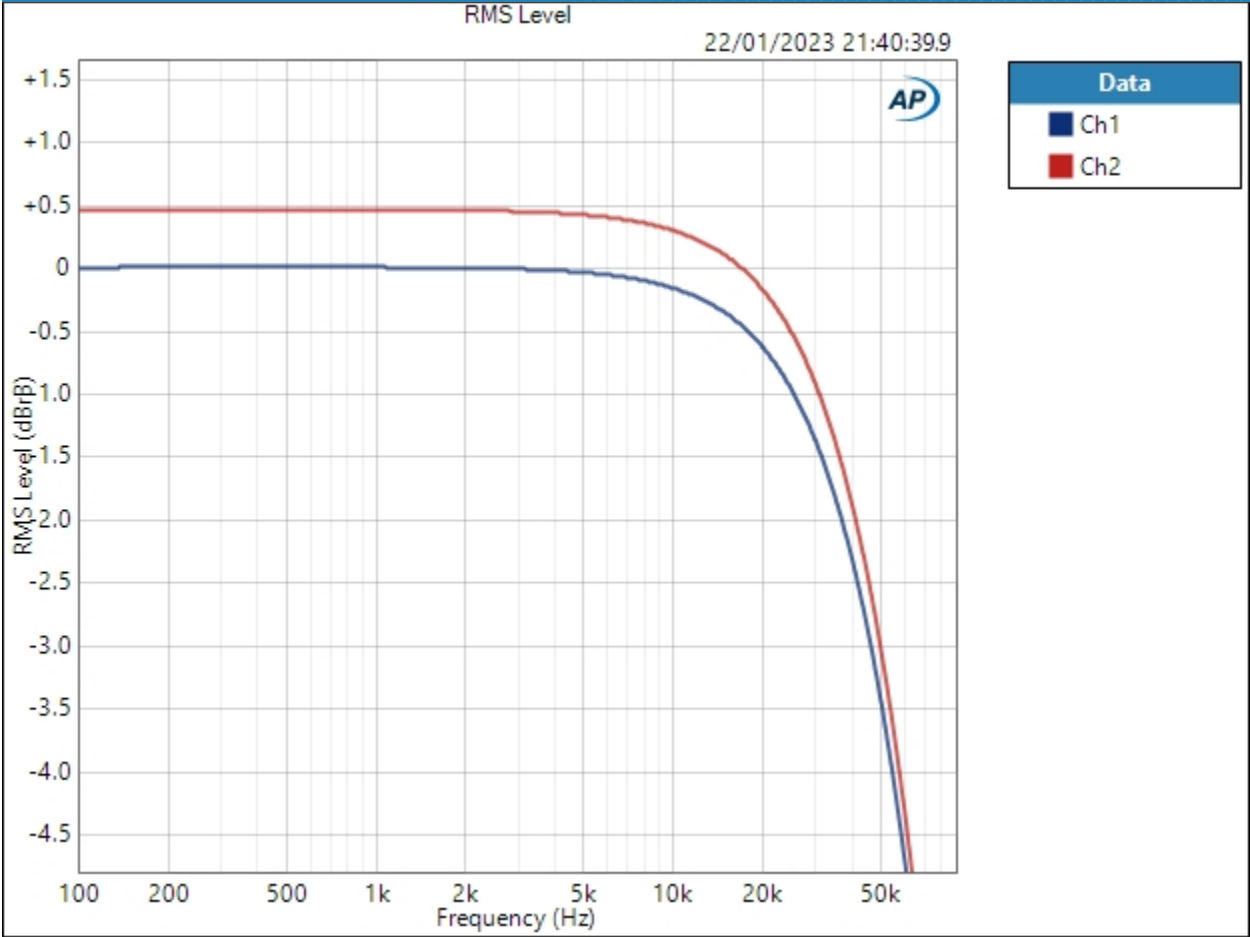

Result: PASSED



## Sequence Report



### SIG 6 - THD and Phase vs Frequency : Signal Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	44.1000 kHz
Output Latency:	Auto
Buffer Size:	2048
Clock Source:	Big Ben
Input 1:	Analog Balanced
Measure:	Auto
Channels:	Custom (2 Channels)
Ch1	Data from Ch1, Sensitivity = 0.00 dB, Gain = 0.00 dB
Ch2	Data from Ch2, Sensitivity = 0.00 dB, Gain = 0.00 dB
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Input EQ:	None
Termination:	200 kohm
High Performance Sine Analyzer:	Enabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	4.001 Vrms
dBrB:	4.001 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	3.000 dB
dB SPL1:	4.001 Vrms
dB SPL2:	4.001 Vrms
dB SPL1 Calibrator Level:	60.000 dB SPL
dB SPL2 Calibrator Level:	50.000 dB SPL



## Sequence Report



dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising




## Sequence Report



SIG 6 - THD and Phase vs Frequency : THD+N vs frequency (AES 40kHz filter)

Waveform:	Sine
Generator Level:	-0.000 dBFS
DC Offset:	0.000 D
EQ:	None
Start Frequency:	22.0059 kHz
Stop Frequency:	20.0000 Hz
Step Type:	Logarithmic
Number of Points:	64
High-pass Filter:	Elliptic
High-pass Frequency:	20 Hz
Low-pass Filter:	Signal Path
Weighting Filter:	Signal Path
Phase Ref Channel:	Ch1
Measured 1	22/01/2023 21:41:24

THD+N Ratio (22/01/2023 21:41:24.599)

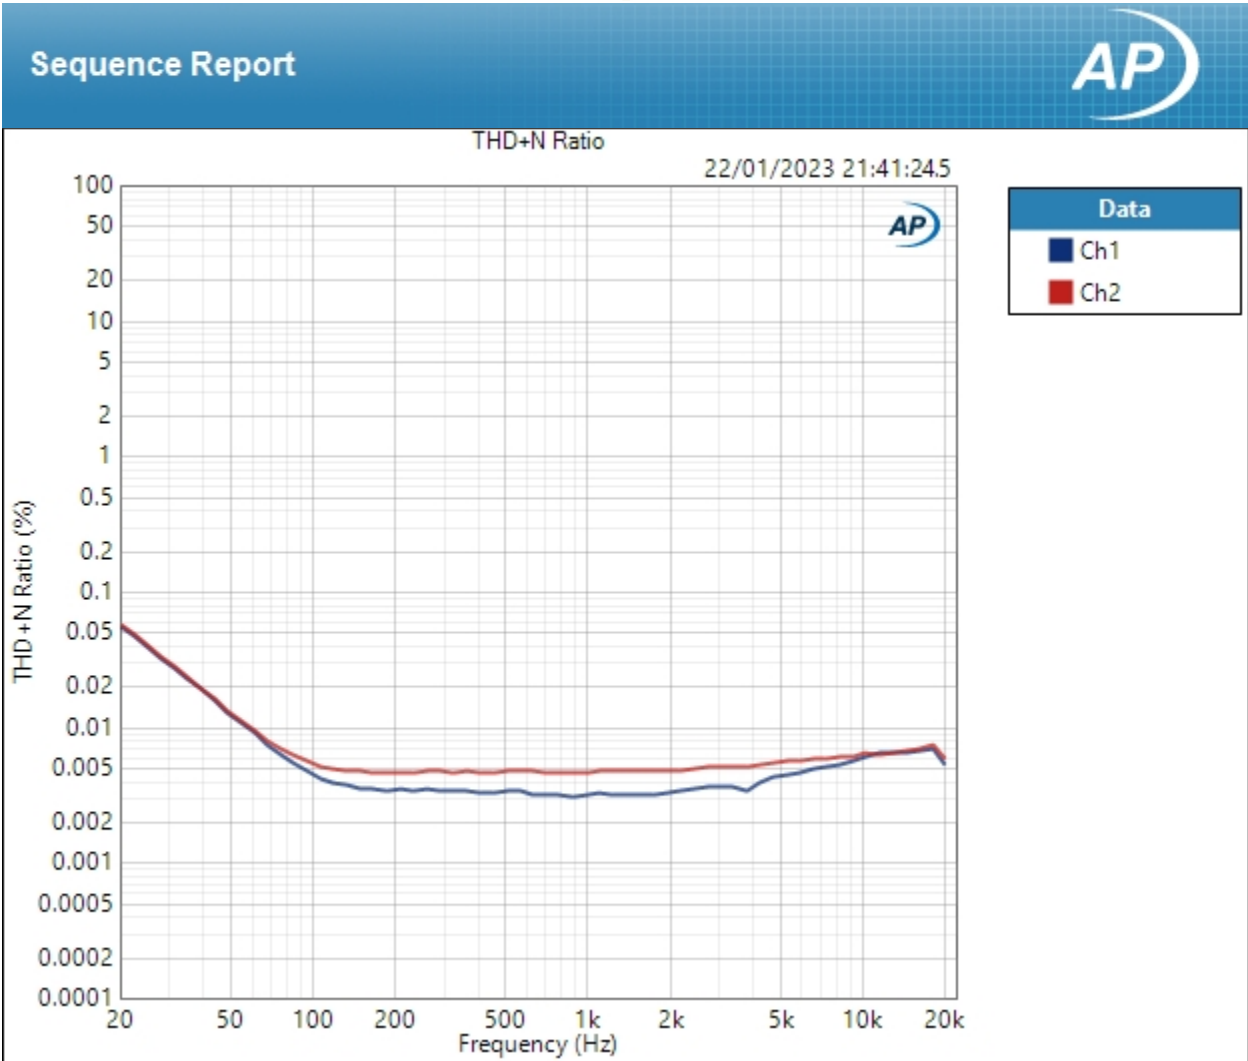

Result: PASSED





## Sequence Report




SIG 6 - THD and Phase vs Frequency : Interchannel Phase and Group Delay

Start Frequency: 20.0000 Hz  
Stop Frequency: 20.0000 kHz  
Generator Level: -20.000 dBFS  
DC Offset: 0.000 D  
EQ: None  
Pre-Sweep: 0.000 s  
Sweep: 350.0 ms  
Measured 1 22/01/2023 21:41:27  
Step Type: Log Chirp  
Extend Acquisition By: 50.00 ms  
Crosstalk Type: High speed  
Secondary Source: None

Phase (22/01/2023 21:41:27.389)



## Sequence Report

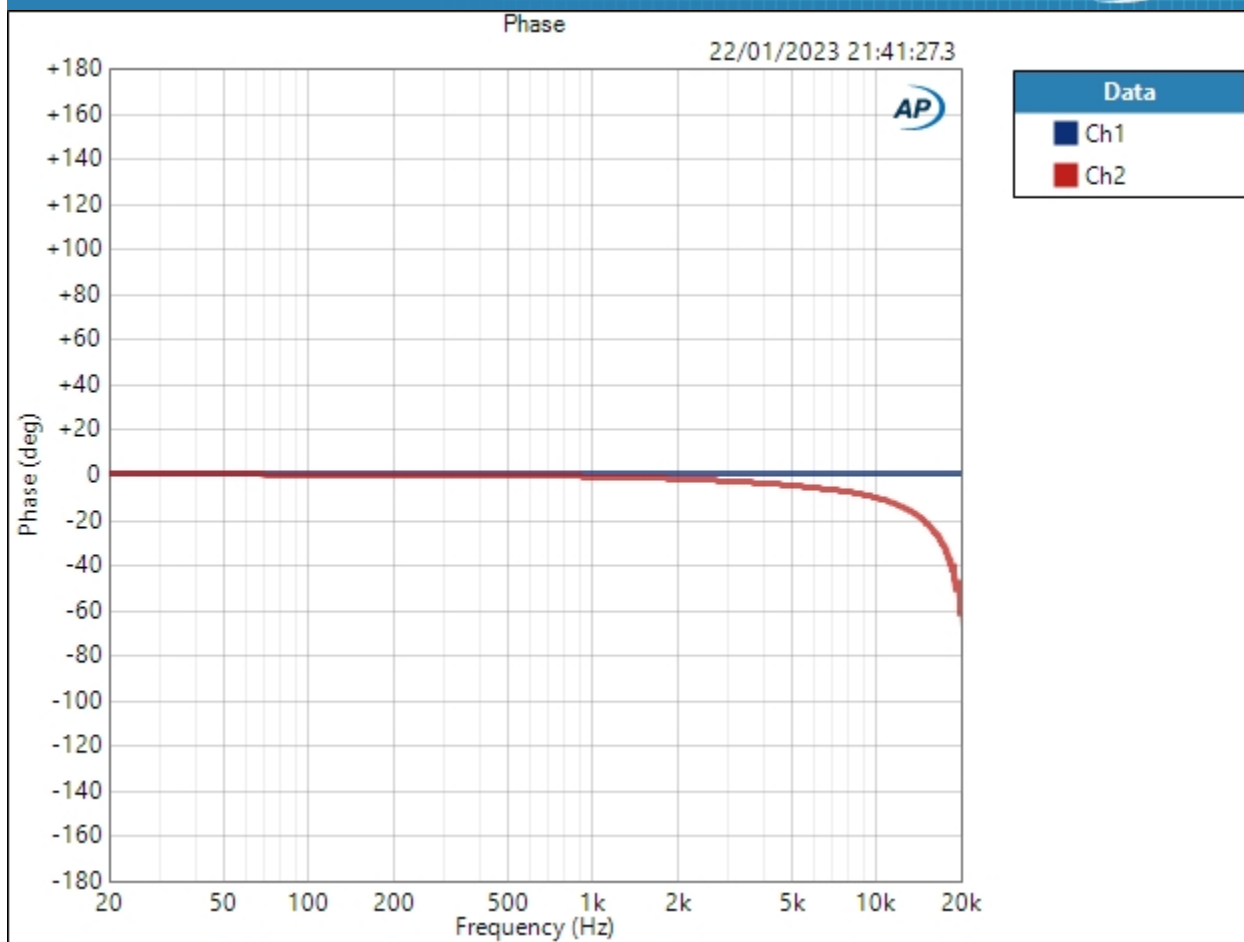

### Phase Parameters


Mode: Relative to Ch1

Result: ✔ PASSED

Group Delay (22/01/2023 21:41:27.389)



## Sequence Report

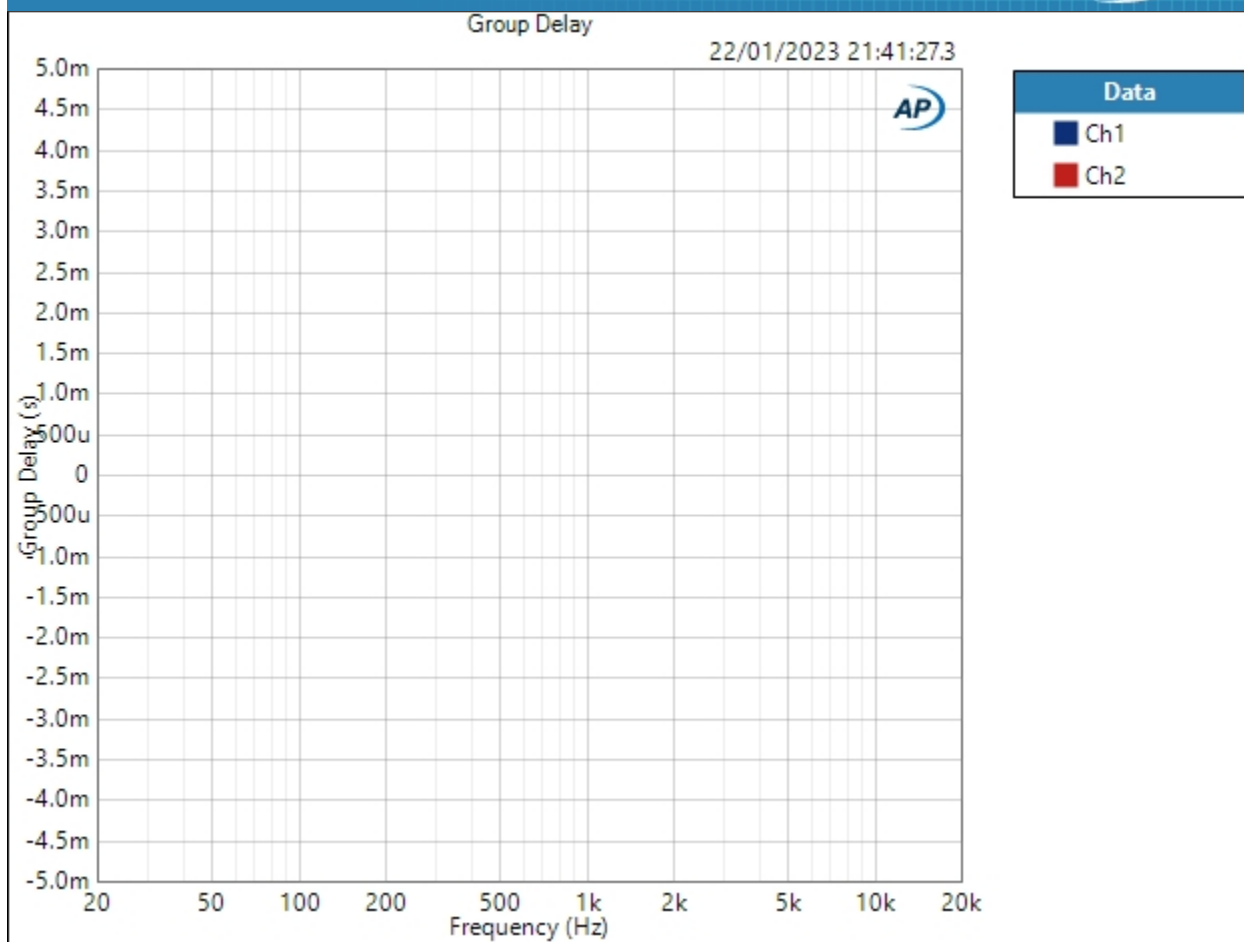

Result: PASSED



## Sequence Report



### SIG 7 - Wideband and Intersample Overs : Signal Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	44.1000 kHz
Output Latency:	Auto
Buffer Size:	2048
Clock Source:	Big Ben
Input 1:	Analog Balanced
Measure:	Auto
Channels:	Auto (2 Channels)
Ch1	Data from Ch1, Sensitivity = 0.00 dB, Gain = 0.00 dB
Ch2	Data from Ch2, Sensitivity = 0.00 dB, Gain = 0.00 dB
Input Bandwidth:	AC (<10 Hz) - 1M (2.496 MHz SR)
Input EQ:	None
Termination:	200 kohm
High Performance Sine Analyzer:	Disabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	4.001 Vrms
dBrB:	4.001 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	3.000 dB
dB SPL1:	4.001 Vrms
dB SPL2:	4.001 Vrms
dB SPL1 Calibrator Level:	60.000 dB SPL
dB SPL2 Calibrator Level:	50.000 dB SPL



## Sequence Report



dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising



## Sequence Report




SIG 7 - Wideband and Intersample Overs : Wideband idle noise

Waveform: Sine  
Generator Level:  $-\infty$  dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1: 22/01/2023 21:41:39  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 1248000  
Averaging: Power  
Averages: 6  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:41:39.016)



# Sequence Report

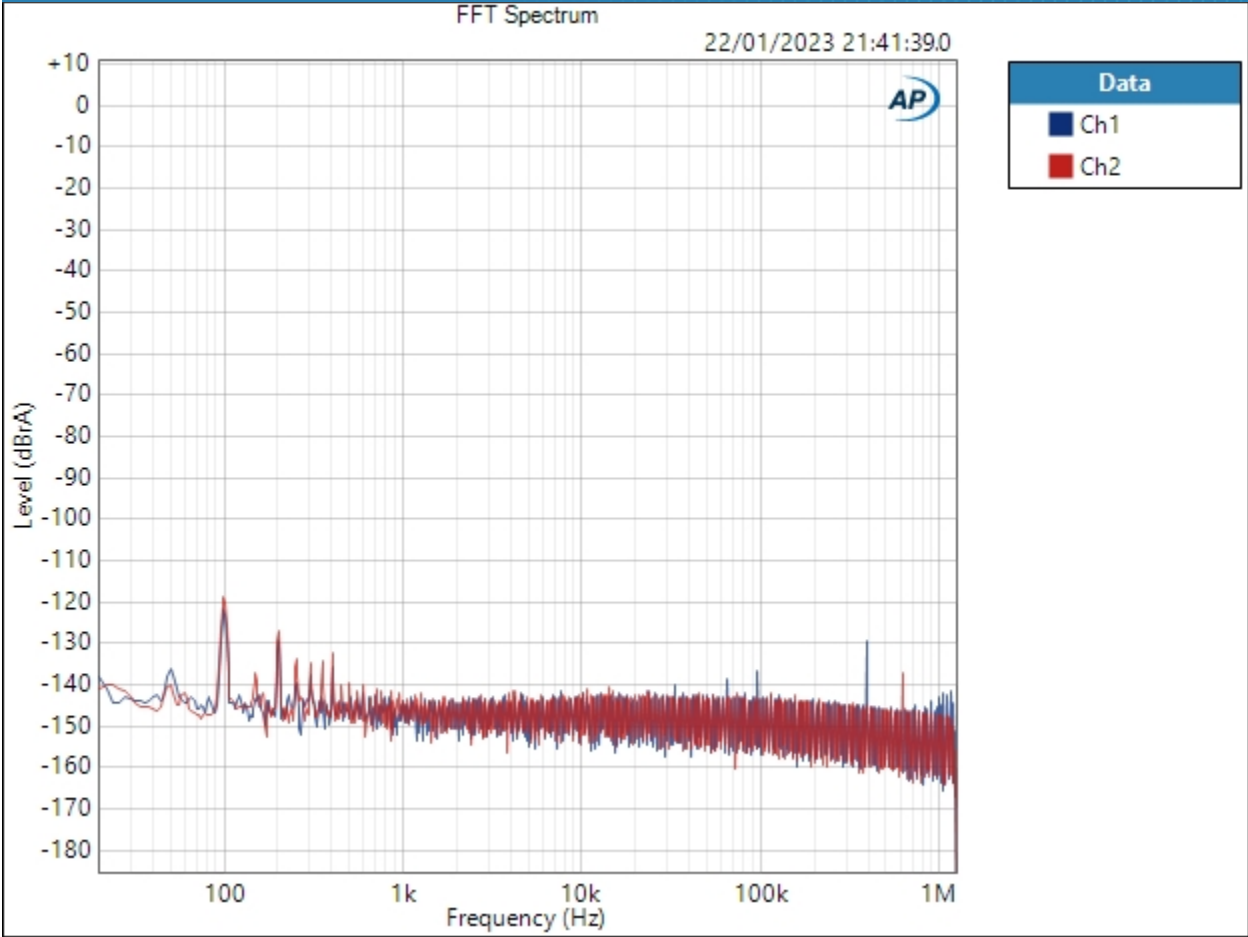

Result: PASSED



## Sequence Report



SIG 7 - Wideband and Intersample Overs : 1khz 0dbfs wideband


Waveform: Sine  
Generator Level: -0.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 22/01/2023 21:41:48  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 1248000  
Averaging: Power  
Averages: 6  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:41:48.898)





# Sequence Report AP

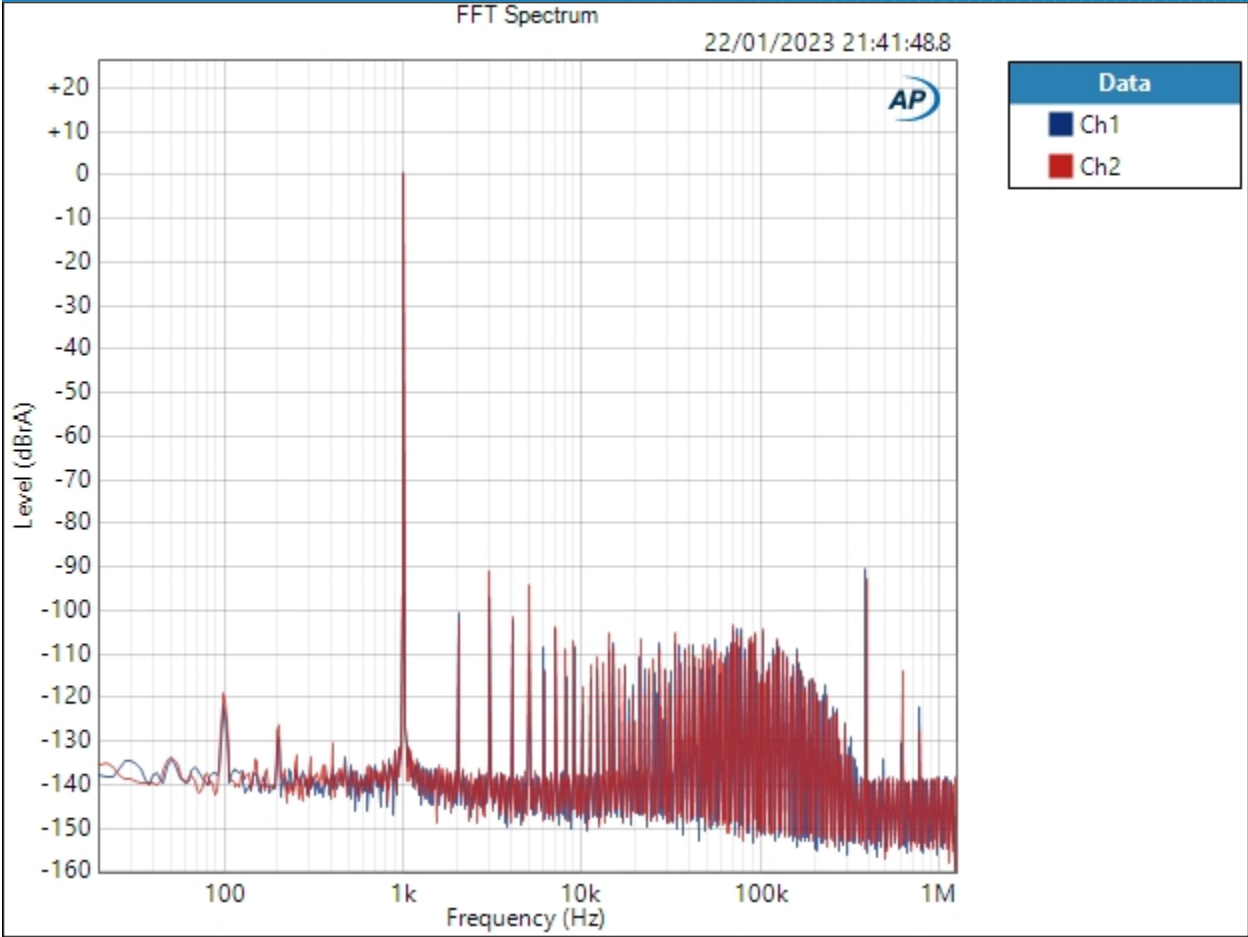

Result: ✔ PASSED



## Sequence Report




SIG 7 - Wideband and Intersample Overs : 1khz -3dbfs wideband

Waveform: Sine  
Generator Level: -3.000 dBFS  
DC Offset: 0.000 D  
Frequency: 1.00000 kHz  
Secondary Source: None  
Measured 1 22/01/2023 21:41:58  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 1248000  
Averaging: Power  
Averages: 6  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:41:58.773)



# Sequence Report

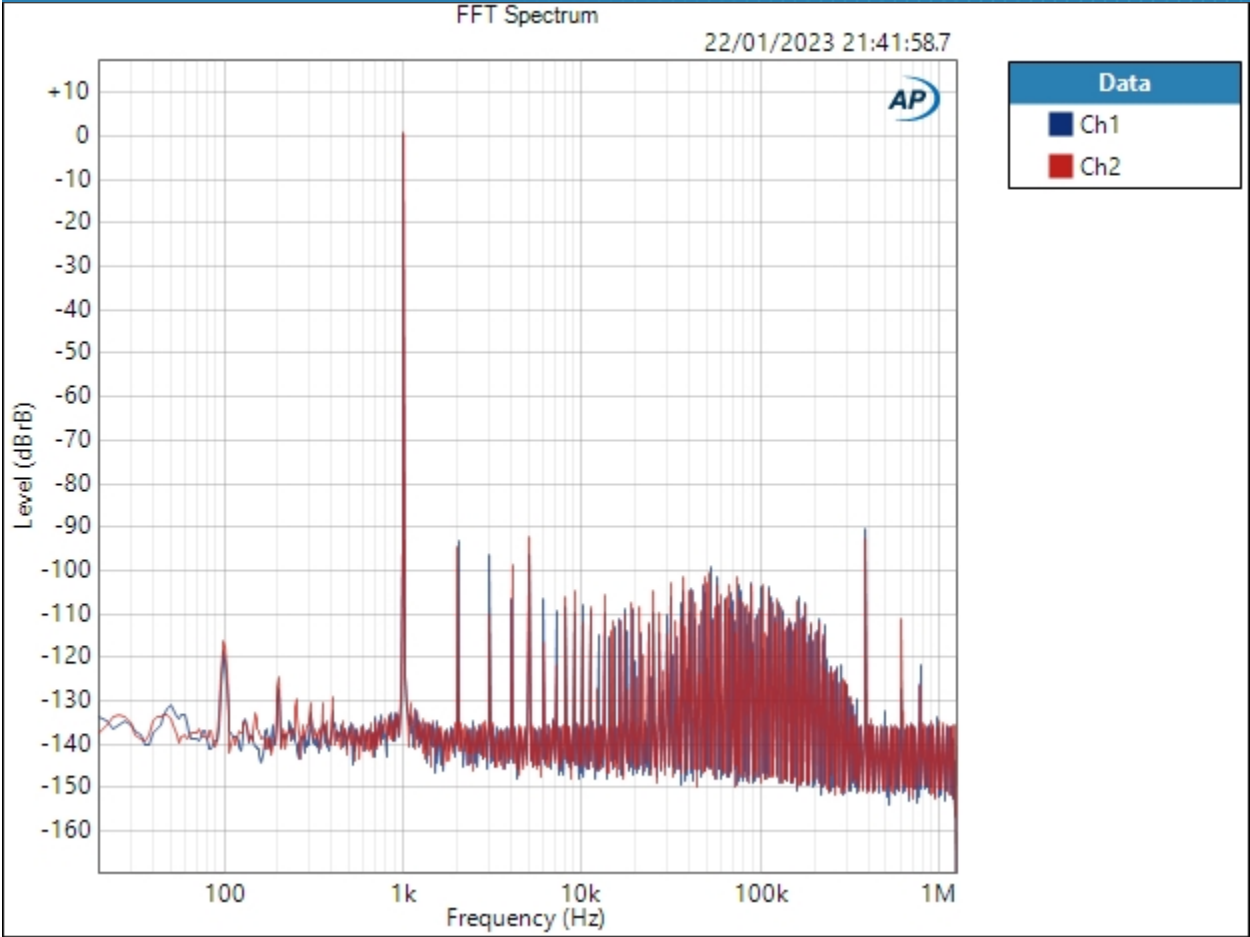

Result: PASSED



## Sequence Report




SIG 7 - Wideband and Intersample Overs : Intersample Overs (+3dB)

Waveform: Intersample overs +3dB.wav  
Bit Exact: True  
Start Offset (sec): 0.000 s  
Secondary Source: None  
Measured 1: 22/01/2023 21:42:07  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 1.000 s  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 4  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:42:07.607)



# Sequence Report

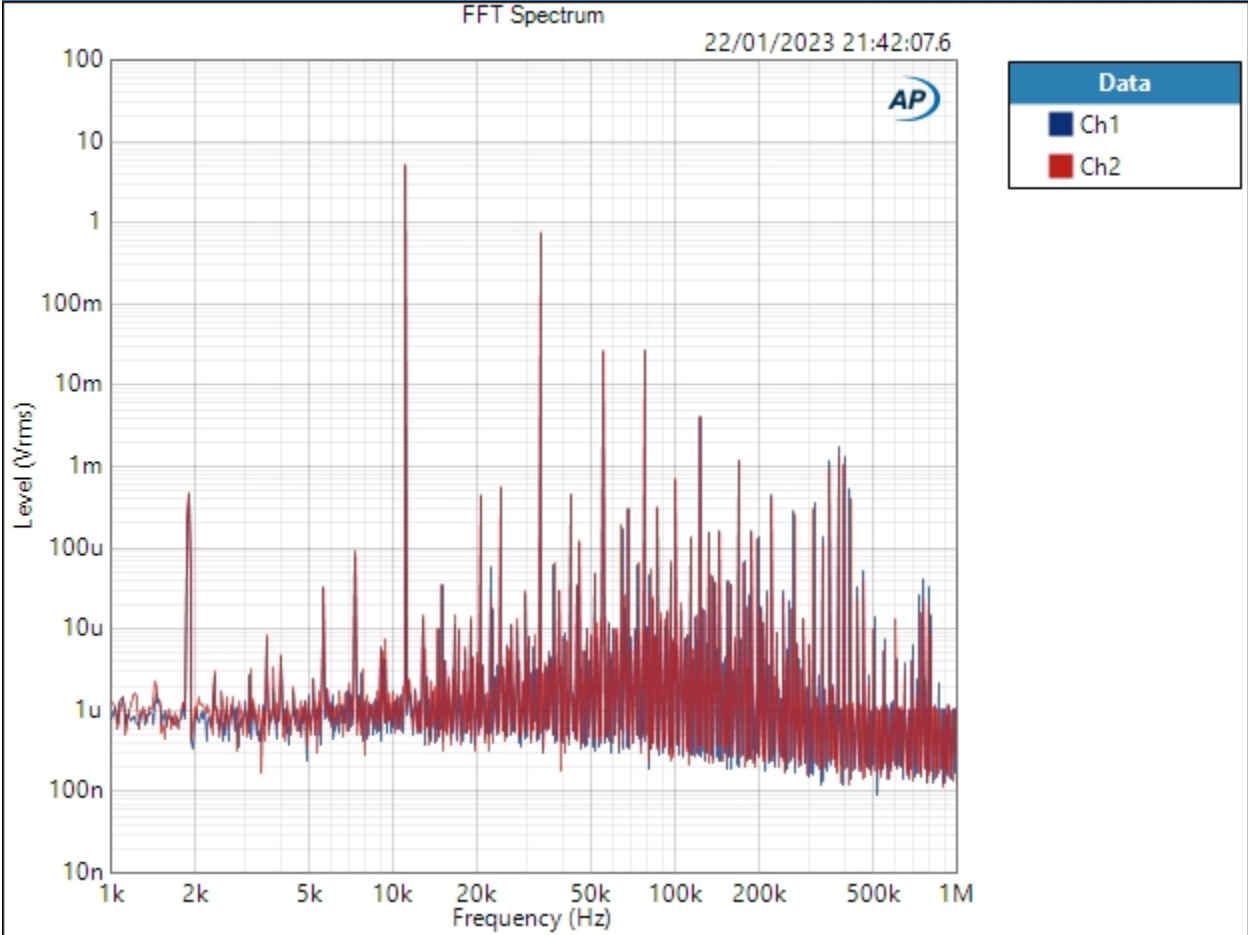


Result: ✔ PASSED

Scope (22/01/2023 21:42:07.607)



## Sequence Report

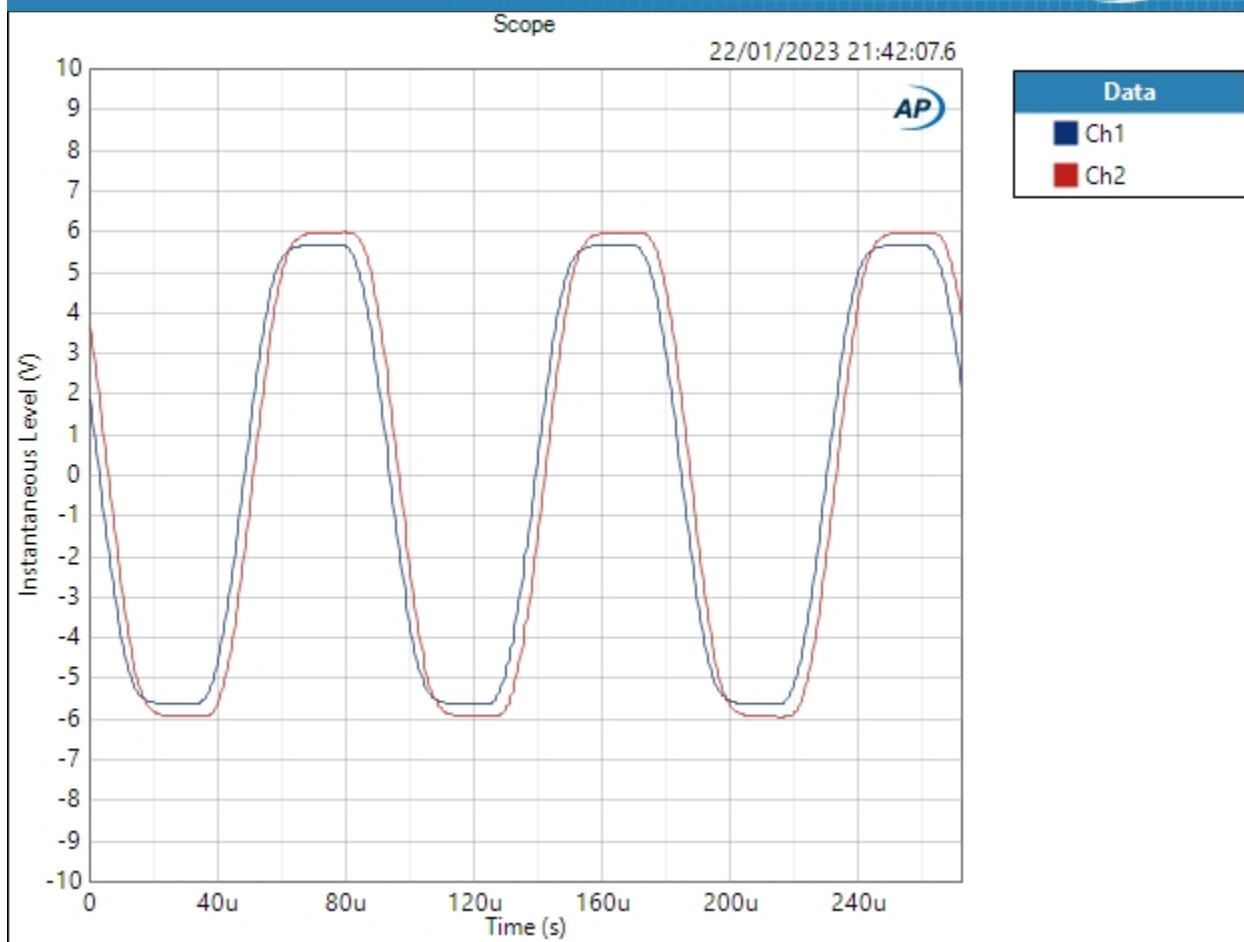

Scope Parameters

Interpolated: On

Result: PASSED



## Sequence Report




SIG 7 - Wideband and Intersample Overs : Intersample Overs (+1dB)

Waveform: Intersample Overs +1dB.wav  
Bit Exact: True  
Start Offset (sec): 0.000 s  
Secondary Source: None  
Measured 1: 22/01/2023 21:42:16  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 1.000 s  
Input Bandwidth: Use Signal Path  
FFT Length: 262144  
Averaging: Power  
Averages: 4  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:42:16.244)



# Sequence Report AP

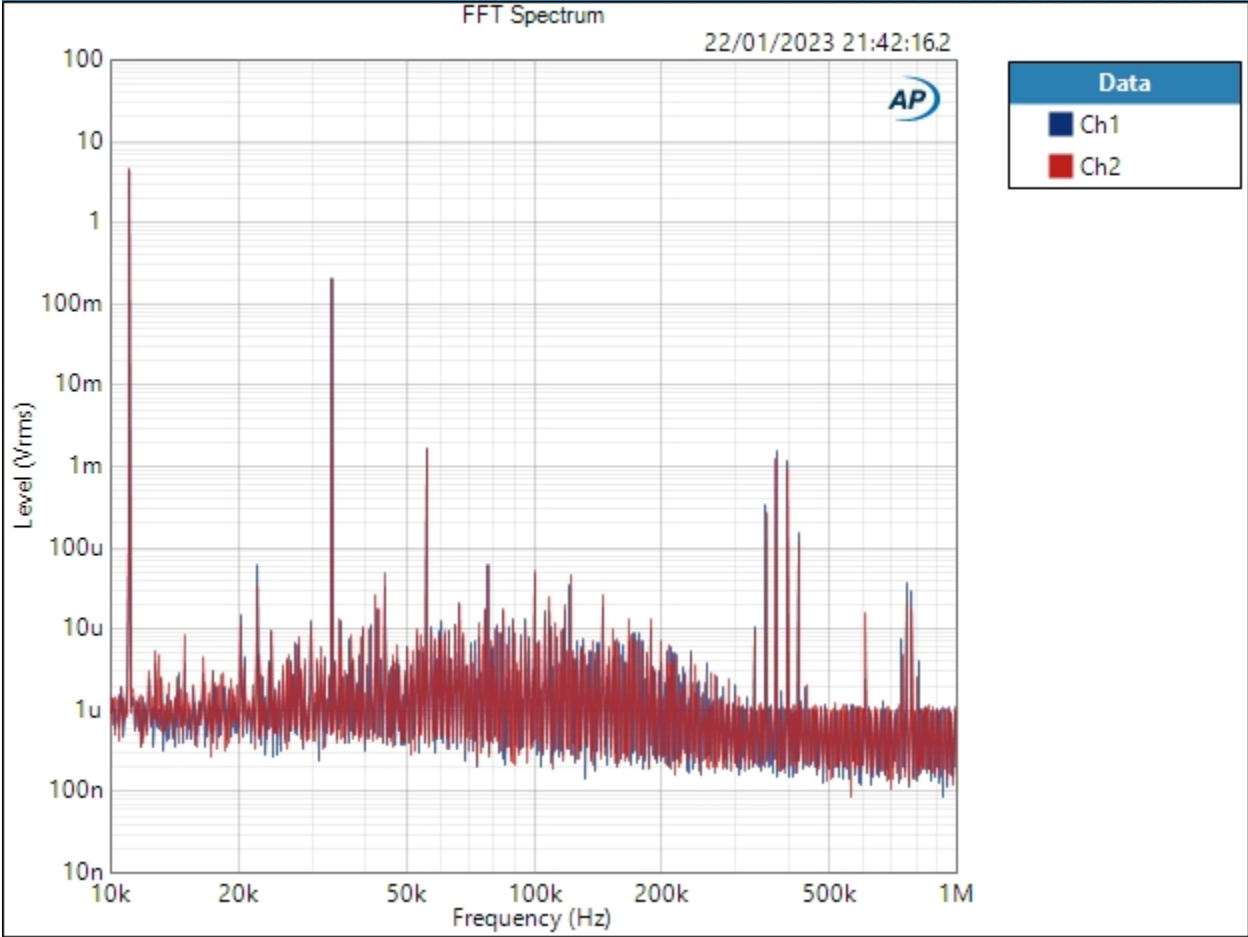


Result: ✔ PASSED

Scope (22/01/2023 21:42:16.244)





## Sequence Report

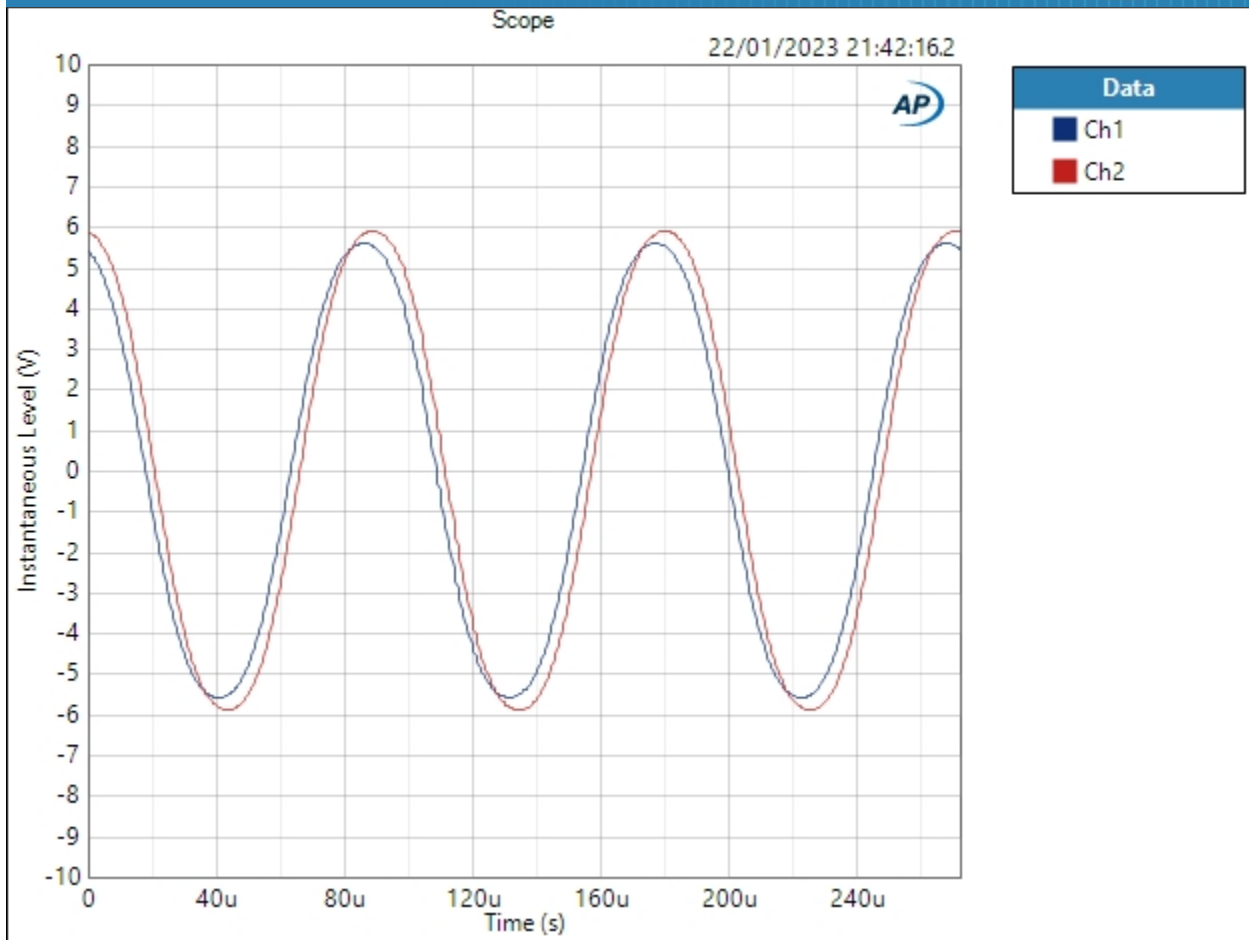

Scope Parameters

Interpolated: On

Result: PASSED



## Sequence Report



### SIG 8 - Multitone : Signal Path Setup

Output Connector:	ASIO
Asio Device:	ASIO4ALL v2
Scaling Mode:	Digital
Output Sample Rate:	192.000 kHz
Output Latency:	Auto
Buffer Size:	2048
Clock Source:	Big Ben
Input 1:	Analog Balanced
Measure:	Auto
Channels:	Custom (2 Channels)
Ch1	Data from Ch1, Sensitivity = 0.00 dB, Gain = 0.00 dB
Ch2	Data from Ch2, Sensitivity = 0.00 dB, Gain = 0.00 dB
Input Bandwidth:	AC (<10 Hz) - 90k (192 kHz SR)
Input EQ:	None
Termination:	200 kohm
High Performance Sine Analyzer:	Enabled
Input 2:	None
Device Delay:	0.000 s
• References	
dBr G:	-20.000 dBFS
Shared Frequency Reference:	1.00000 kHz
Analog Input	
dBrA:	4.160 Vrms
dBrB:	4.160 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	3.000 dB
dB SPL1:	4.160 Vrms
dB SPL2:	4.000 Vrms
dB SPL1 Calibrator Level:	60.000 dB SPL
dB SPL2 Calibrator Level:	21.500 dB SPL



## Sequence Report



dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm
• DCX	
DCX is not detected.	
• Clocks	
Output Rate:	Track Output SR
Sync Out Level:	3.300 V
Sync Out Polarity:	Normal
Timebase Reference:	Internal
Jitter:	Disabled
• Triggers	
Source:	Off
Input Logic Level:	3.300 V
Edge:	Rising



## Sequence Report




### SIG 8 - Multitone : 32 Tone Test

Waveform: APx555 Multitone 32 192 khz 24 bit.wav  
Bit Exact: True  
Start Offset (sec): 0.000 s  
Secondary Source: None  
Measured 1: 22/01/2023 21:43:50  
Acquisition Type: Auto  
Trigger: Free Run  
Delay Time: 250.0 ms  
Input Bandwidth: Use Signal Path  
FFT Length: 1248000  
Averaging: Power  
Averages: 3  
Window: AP-Equiripple  
Record Acquisition: False  
Recording Type: Multiple Mono PCM (.wav)

FFT Spectrum (22/01/2023 21:43:50.593)



## Sequence Report

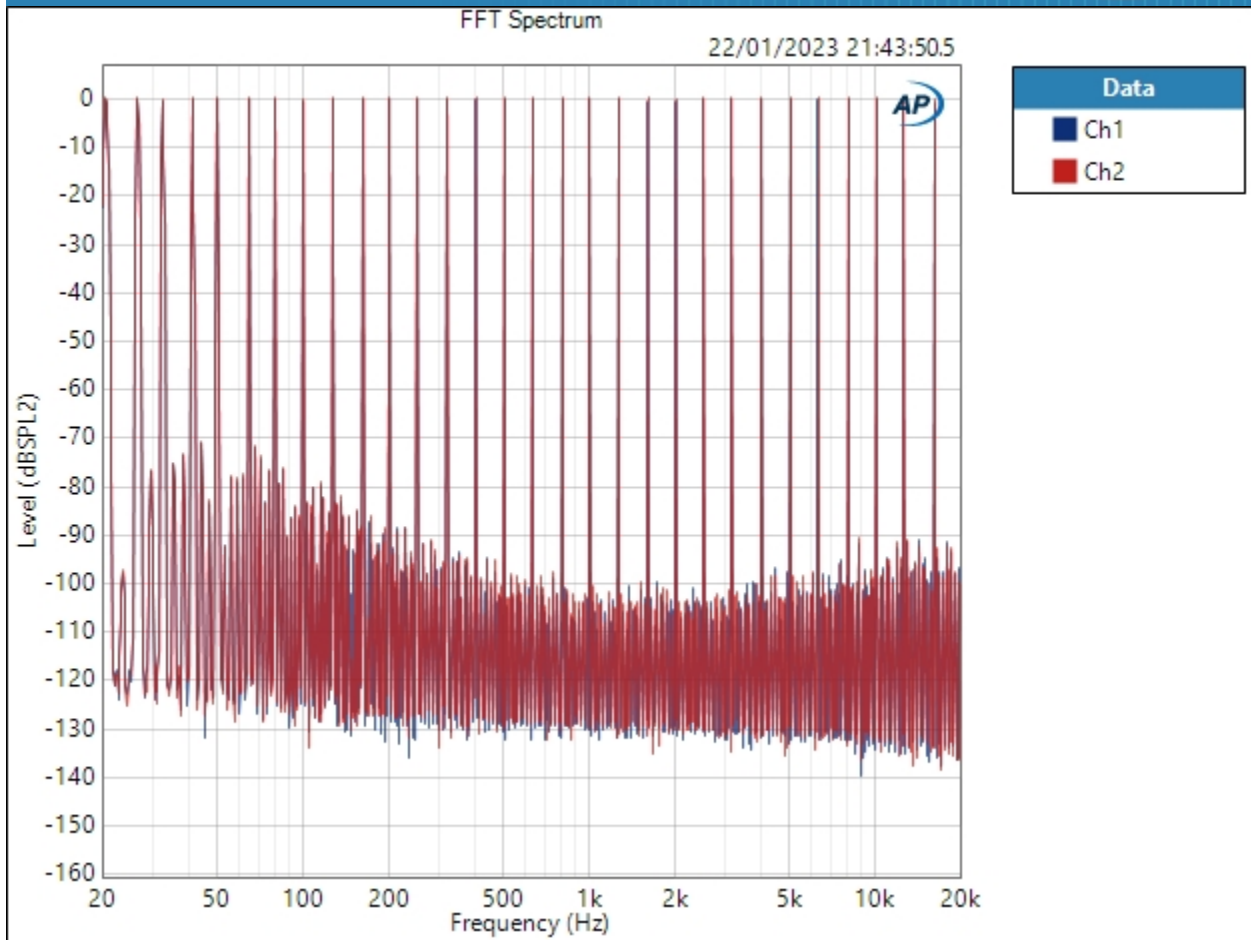


Result: ✔ PASSED

Scope (22/01/2023 21:43:50.593)



# Sequence Report AP

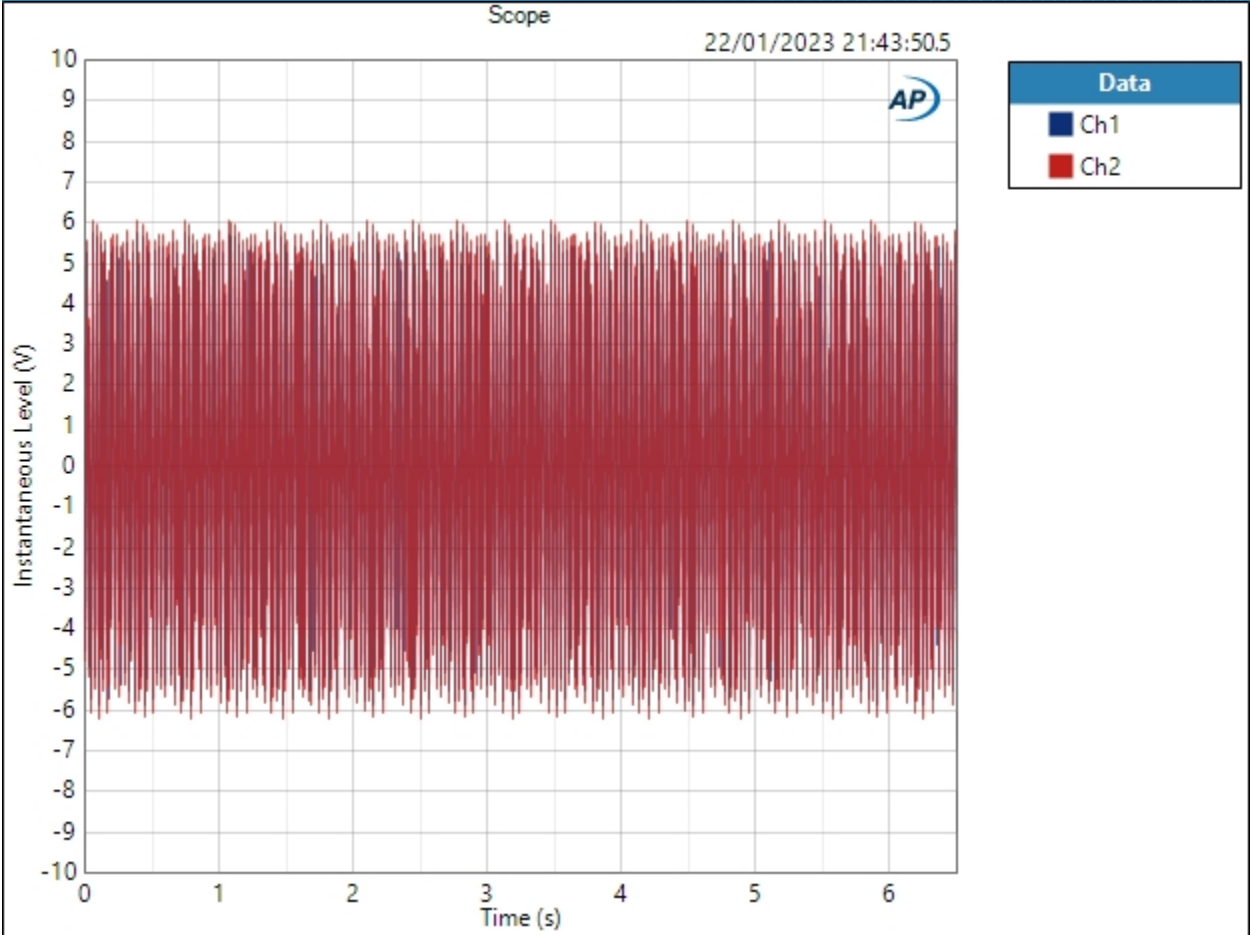

Scope Parameters


Interpolated: On

Result: ✔ PASSED

Amplitude Spectral Density (22/01/2023 21:43:50.593)



## Sequence Report

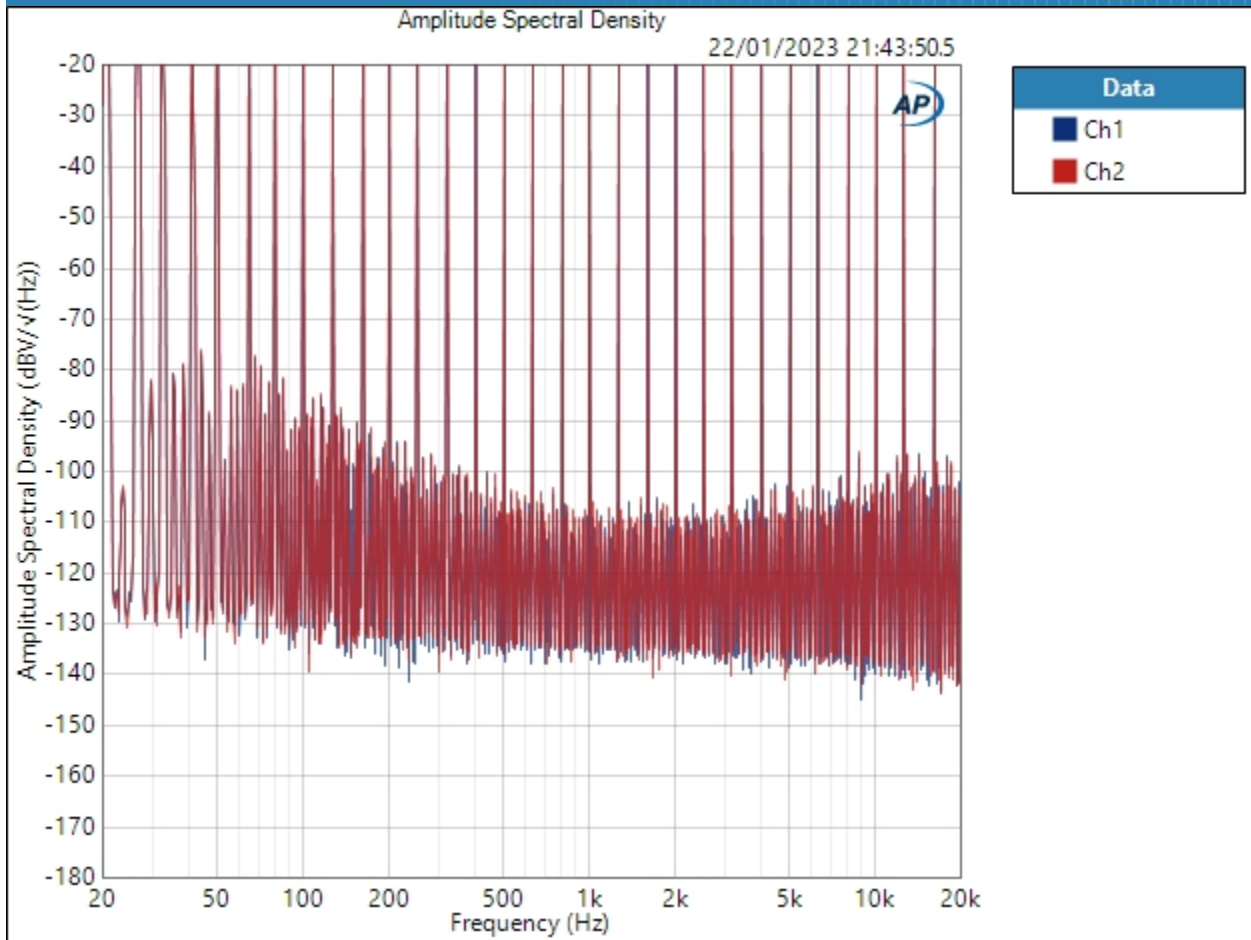


Result: ✔ PASSED

Power Spectral Density (22/01/2023 21:43:50.593)



# Sequence Report

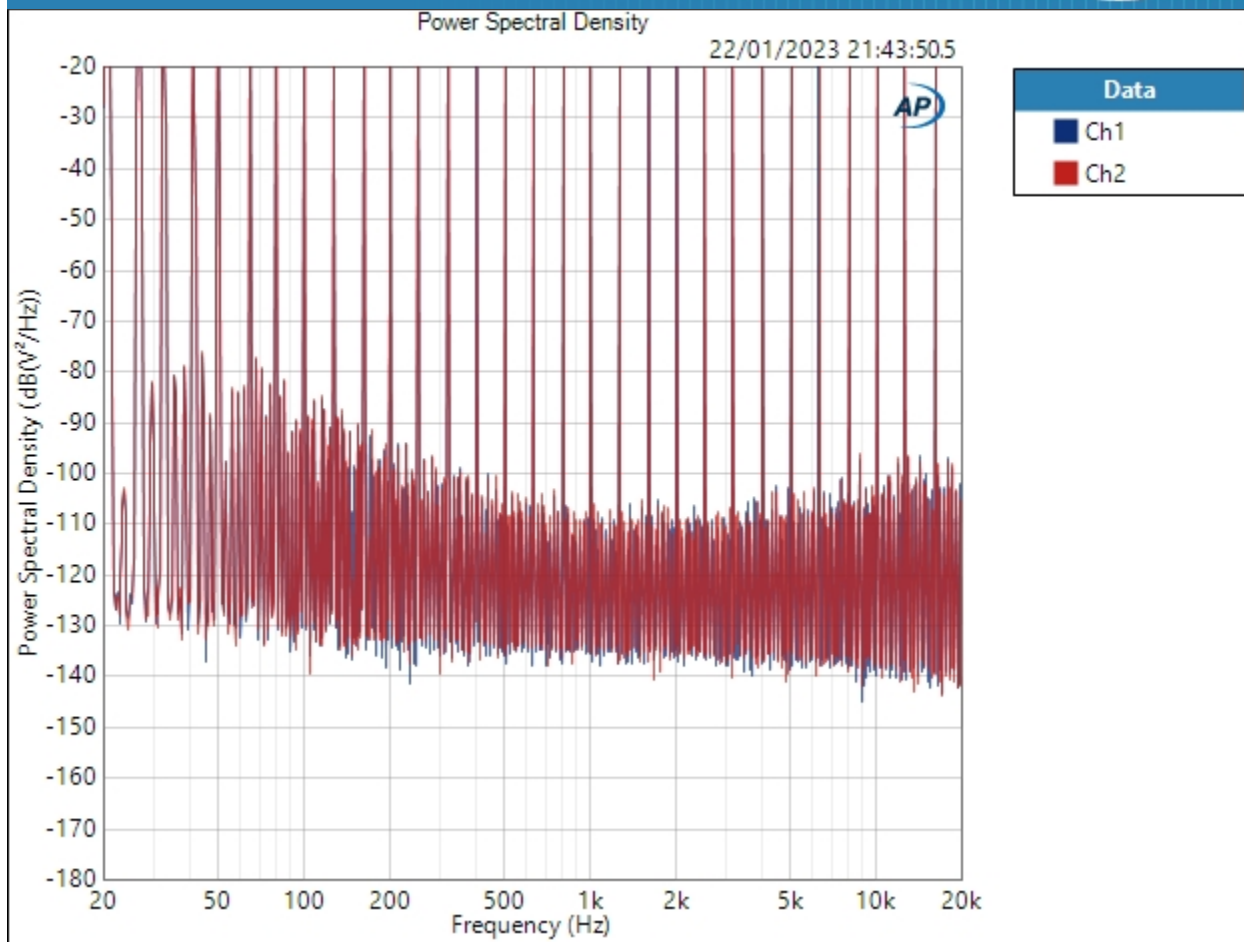

Result: PASSED