

## High Temperature (HT) Sensors

Get better control of your suspended solids, control your losses, control product change, control concentration, control dosing - accurately and repeatedly.

- Available in both Immersion and Hygiene designs with Tri-clover fittings.
- HT sensors cover similar ranges to the equivalent S Series Sensors and are used in similar applications
- All product contact areas are manufactured from PVDF.
- Max working temp 105 °C
- Hygienic Sensors are 3" Tr-Clover
- Concentration information same as standard S Series.




S10HT-3HY




S20HT-3HY

# Sensor Dimensions

## S10HT-3HY

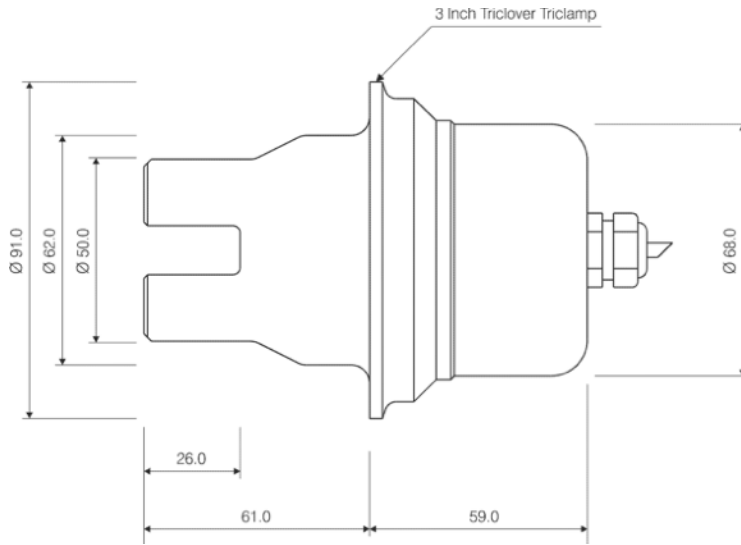

## S20HT-3HY

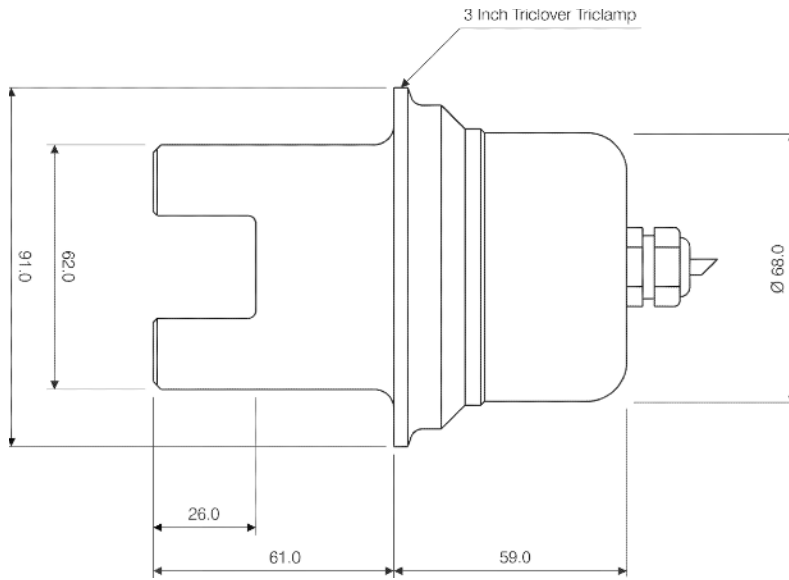

## S20HT-IMM

