


# How to Apply?

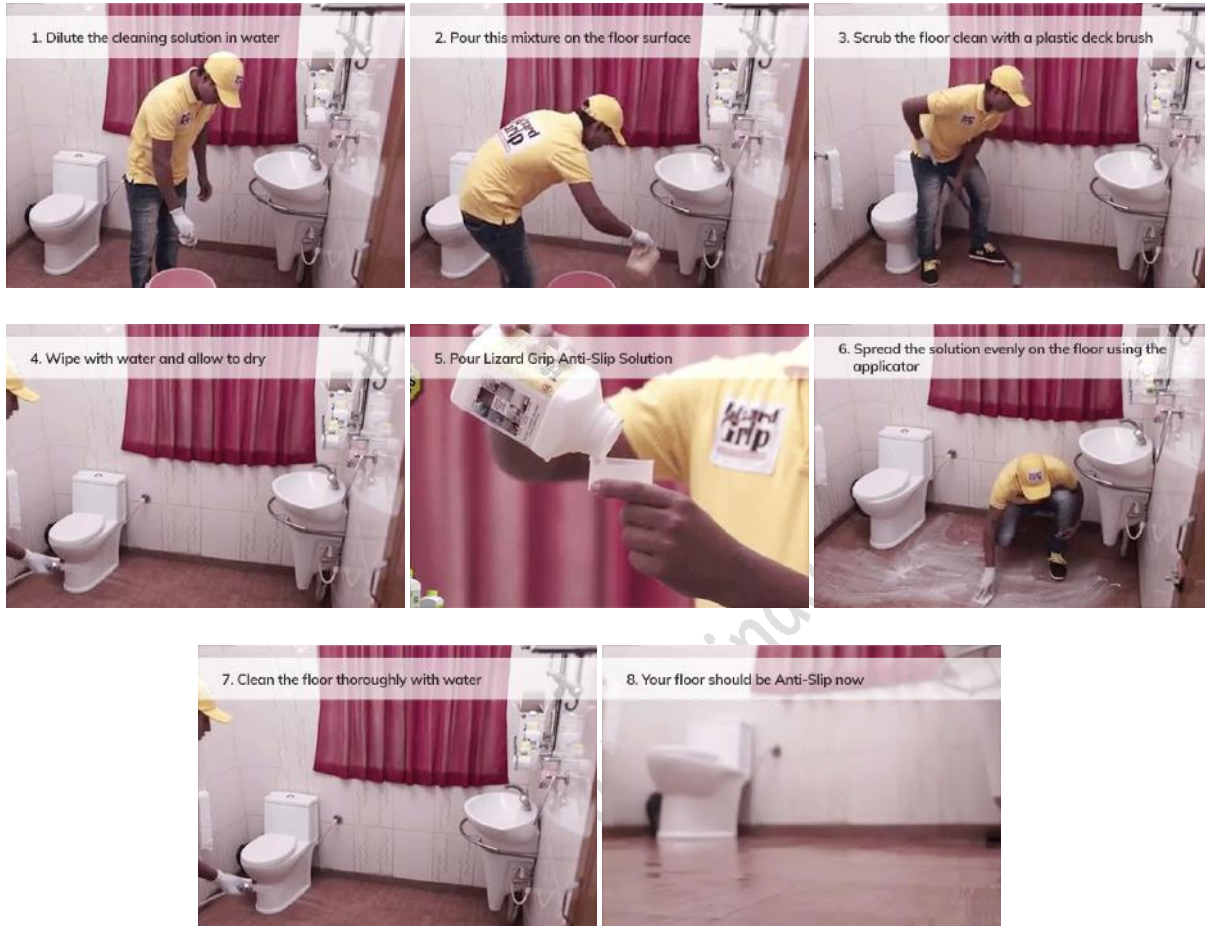

## STEP - 1:PREPARING THE FLOOR

- Dilute the non-abrasive PH Neutral Floor Degreaser provided in the kit, by adding 200 ml water
- Spread this mixture on the floor surface and leave for 10 minutes
- After 10 minutes, scrub the floor clean to get rid of all kinds of dirt (Use a deck brush with plastic bristles for scrubbing)

## STEP - 2:CLEANING THE FLOOR

- Wipe with water and allow the floor to dry completely with no trace of water

## STEP - 3:APPLYING THE SOLUTION

- Once the floor is completely dry, pour Lizard Grip Anti Slip Floor Solution (3 ml per sq. ft.) and spread it on the floor using the non-abrasive applicator included in the kit. Apply in successive vertical and horizontal movements

- Let the solution dry for around 3 minutes
- After 3 minutes, continue the vertical and horizontal movements to spread the solution evenly
- Allow the floor to dry for another 15-20 minutes

#### **STEP - 4:REPEATING THE PROCESS**

- For a second coat, pour Lizard Grip Anti Slip Solution (2 ml/sq.ft.)
- Rub the floor with the applicator as done in STEP 3
- Allow the floor to dry for 20-30 minutes

#### **STEP - 5:FINAL STEP**

- Once the floor is dry, pour plain water and scrub the floor clean using the non-abrasive pad given in the package
- Clean the floor thoroughly with enough water. Your floor should be anti-slip now.

#### **Confirm the results**

- Try sliding your feet with enough pressure (full body weight) and compare it with an untreated surface. The weight should be similar to when you stand on the floor. Please note that the anti-slip properties come into effect when the full body weight falls on the floor just like under normal conditions. If you run your palm or finger lightly on the floor you will not feel the anti-slip property.
- Try sliding your feet with enough pressure (full body weight) and compare it with an untreated surface. The weight should be similar to when you stand on the floor. Please note that the anti-slip properties come into effect when the full body weight falls on the floor just like under normal conditions. If you run your palm or finger lightly on the floor you will not feel the anti-slip property.
- Pour water with oil or soap and you will find the friction after sliding for a couple of inches. The sliding property has been deliberately engineered into the solution so as to avoid a sudden braking effect and prevent a person from falling on his/her face.

---

#### **REMEMBER**

- Please test the solution in a small test area before applying
- Use gloves and footwear during application
- You may repeat the application process from steps 5 to 8 for better results
- Do not apply in direct sunlight and provide enough ventilation

- Do not use any electronic dryer for drying the floor after application
- Ensure that all water sources are closed during application until the floor is completely dry
- Keep out of reach of children
- Do not use the floor during the time of treatment

Uploaded by heyzindagi.in