


PURE-UQ INWALL PAN


CODE
INTERIORS



PAN SPECS:

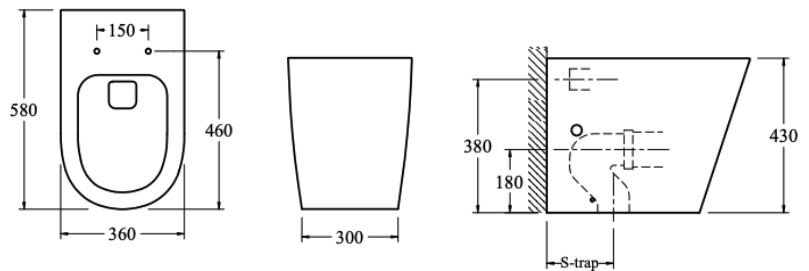

CISTERN INWALL SPECS:

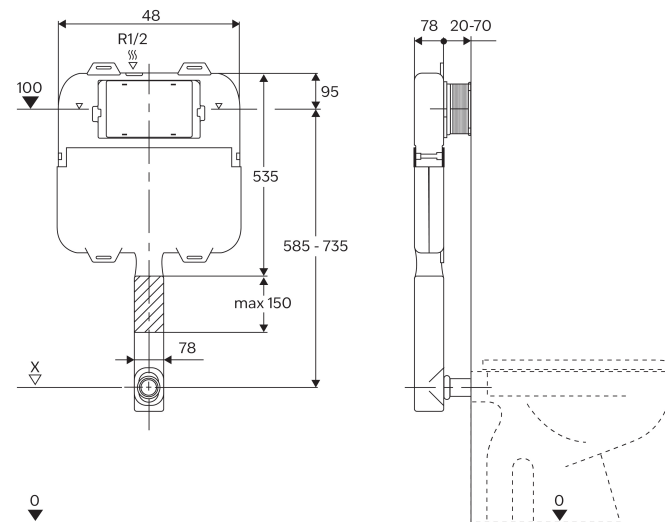

* Min. recommended wall cavity thickness: 90mm

SPECIFICATIONS:

On floor pan only

Flushing system: Ultra Quiet

Size: 580x360x430mm

Vitreous China

P trap: 180mm

OPTIONAL EXTRAS:

S-trap: 60-90mm
(Code: Connector A)

S-trap: 95-115mm
(Code: Connector B)

