



## TRAMPOLINES DOWN UNDER™

Thank you for your purchase! We hope your family Enjoys our products as much as we do!

Our Patented Ground Level Trampoline Products have been engineered with safety, durability, and performance in mind. Please Read this information thoroughly before installation, and be sure to visit us online for more installation tips and videos.

### VENTED SAFETY PAD PARTS LIST

- Vented Pad with Mesh/Vinyl cover
- (8) Buckle Straps




### Installation Instructions

1. Open the vented Pad box and remove contents. (\* buckle straps should already be attached to the buckle sewn to the pad)




2. Un-clip all 8 Buckle Straps from the Pad, and secure them to the Frame of the Trampoline.

\*\*TIP Secure all straps to the left or right of each Trampoline Leg joint on the top frame, to ensure the straps will line up with the buckles on the pad.

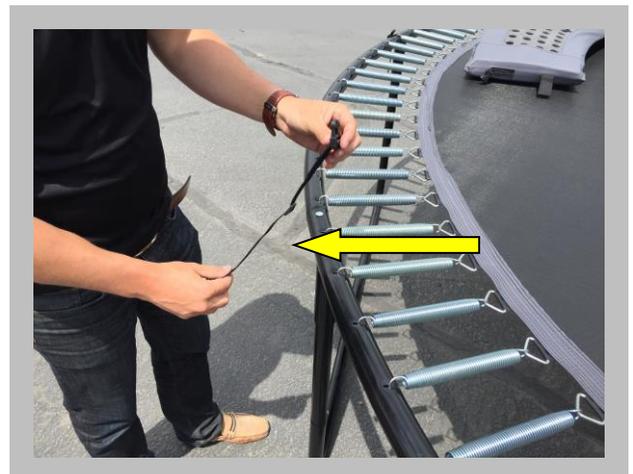


**Figure 3**

3. Start by wrapping the strap around the Trampoline Top frame tubing (directly to the right or left of the leg joint).

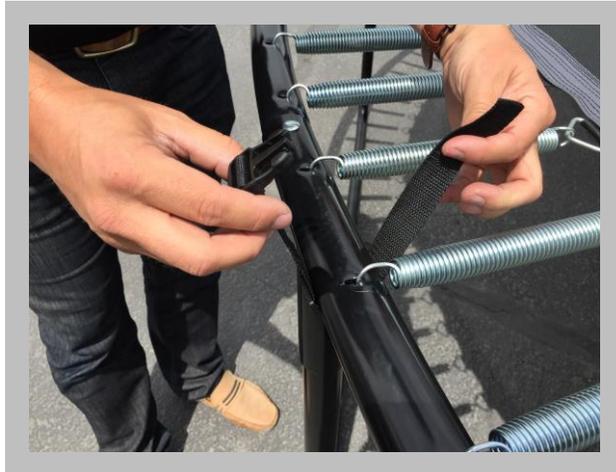



**\*\*NOTE:** Ensure that the Buckle is facing towards the interior of the Trampoline frame as show above.

4. Take the strap end and thread it through the top slot of the buckle (directly below the clip portion) and back through the lower slot of the buckle. See figure 5

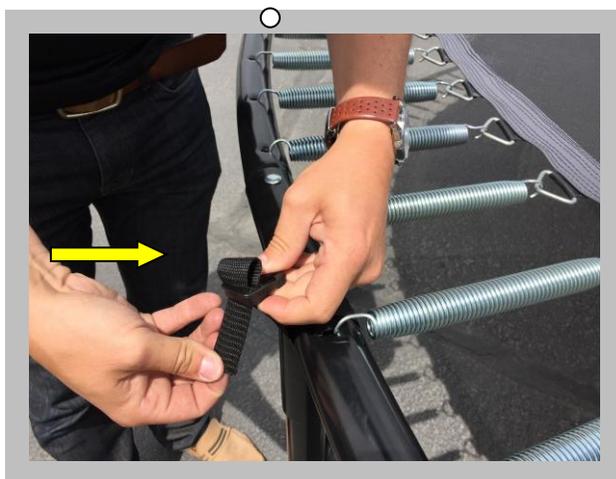

**Figure 5.**

5. Once threaded through the buckle slots, synch the strap tight to the frame, and thread through the strap clasp.

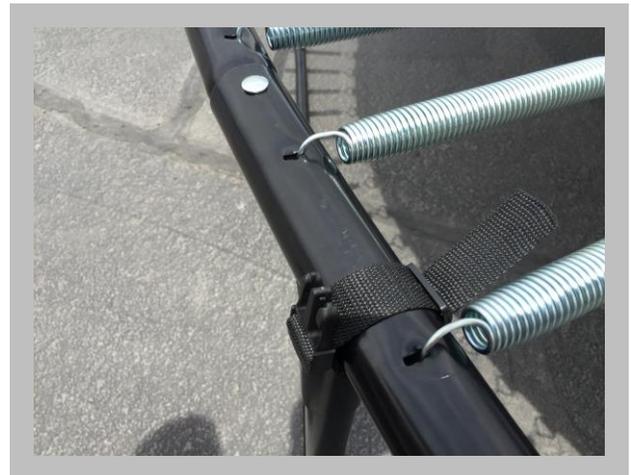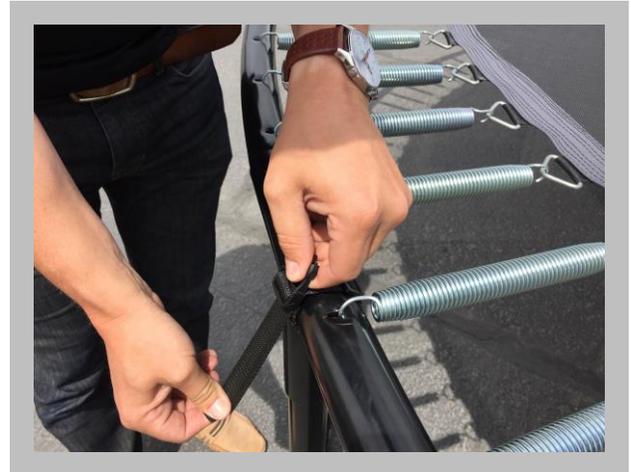

**\*\*TIP:** Placing the clasp to the inside of the frame allows the excess strap end to be out of the way for a more concealed installation. Ensure the buckle is synched Snug, and facing towards the interior of the Trampoline.

6. With all 8 Buckle Straps securely fastened to the Frame of the trampoline, lay out the Vented pad over the springs and line up the buckles with the Straps (do not secure the buckles at this point).

7. Now that the Pad is aligned with the buckle straps that were just installed on the trampoline frame- lift the pad and locate the Spring loops that are mounted under the pad in the center of each pad, and at each seam joint. Remove the spring that is closest to the location of each loop and thread the spring through the loop. Re-attach the springs to the frame. **Note: There are 8 seam joint loops and 8 center loops)**



**Figure 9**



**\*\*TIP:** additional video and installation tips or images are available to view or download online- [www.trampolinesdownunder.com](http://www.trampolinesdownunder.com)

8. With all Spring Loops secured with aligning springs, the final step is to secure all 8 buckles with the previously installed buckle straps. (see figure 9)

#### **Installation of the TDU Weather Cover:**

9. If you have purchased the optional TDU Weather cover- installation simply consists of un-clipping the 8 buckles on the Vented pad, laying out the Weather cover, and clipping the Strap End secured to the frame of the trampoline to the receiving buckle end sewn onto the TDU weather Cover. **\*\* Please note** Previous generation pads may not have compatible buckles- If this is the case- utilize the straps included with the cover- and install the buckles as shown above.

