


TYPICAL MF6 METER

MF6 ENCLOSURE

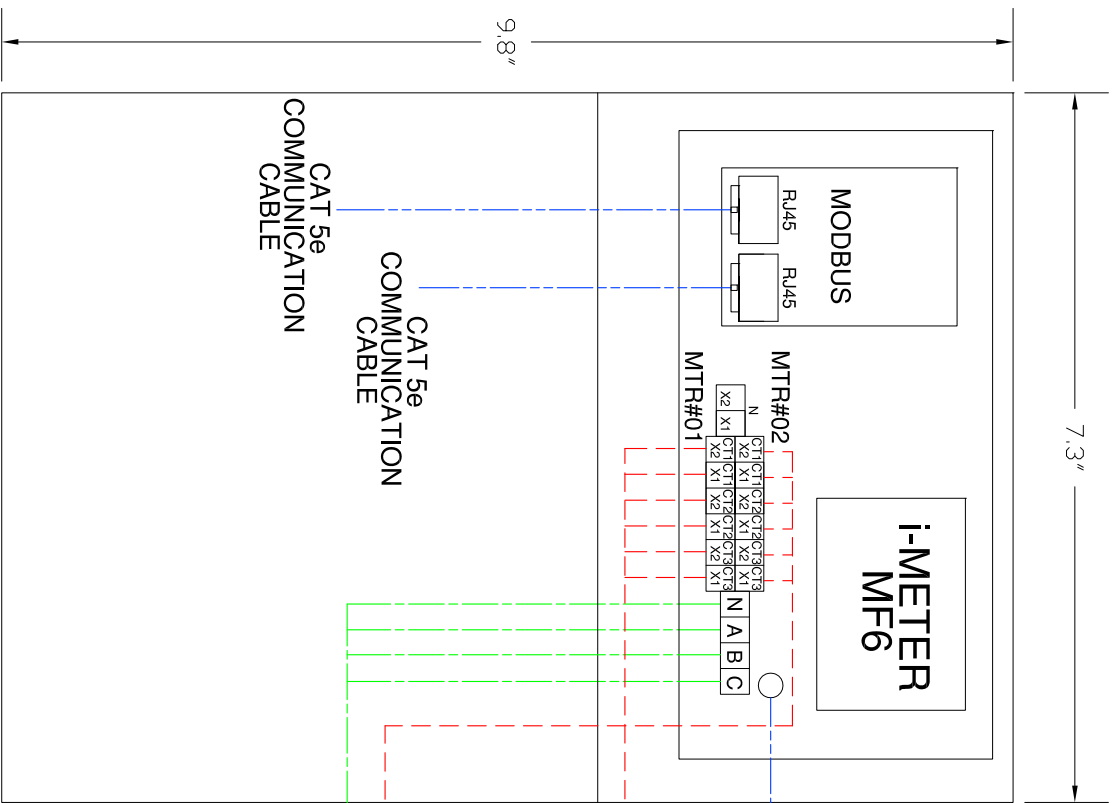

3#18
TWISTED PAIR
SHIELDED

PULSE OUTPUT
TO PTRACKER
PANEL

Red: Pulse-1
White: Pulse-2
Black: Com.

METER CENTER REFERENCE	Autorangeing 120V-347V L-N 3Ø,4W										METER CENTER REFERENCE
METER ND.	BRK. AMP.	NO. OF POLES	PHASE	BREAKER NO.	BREAKER NO.	PHASE	NO. OF POLES	BRK. AMP.	METER ND.	CT NO.	
01	METER 1	200A	3P	A 01	02	A	3P	200A	METER 2	04	
02				B 03	04	B	3P	200A		05	
03				C 05	06	C	3P	15A		06	
				A 07	08	A					
				B 09	10	B					
				C 11	12	C					

15A 3P BREAKER
NEEDED FOR
VOLTAGE REFERENCE

NEUTRAL

i-meter MF6

SUITE NO.	METER NO.
IS METERED BY	METER#01
IS METERED BY	METER#02

- Legend:
- CT Lead (Red) - - - - -
 - Voltage reference (Green) - - - - -
 - Communication (Blue) - - - - -

intellimeter
CANADA INC.
Innovative Metering Solutions

1125 Squires Beach Road
Pickering, Ontario L1W 3T9
Phone: (905) 839-9199
Fax: (905) 839-9198
intellimeter.on.ca

Distributor: _____

Engineer: _____

P.O.# _____

Contractor: _____

Date: _____	Rev. _____
Project #: _____	_____

Drawing #: _____

Drawn: H.P.

Checked: H.P.

Drawing: _____