

2x4FT 50W Ultra Thin LED Troffer Light



Description

Hykology's specifically designed, innovative ultra-thin LED troffer Light is a design based on the ideal replacement of fluorescent troffer. The TR22/24 accepts 120-277VAC, and have a high lumen efficiency up to 125-130Lm/W. With well-distributed soft light, no any dark spot and special ultra-thin design. This Luminaries is regarded as the leading of greening Lighting for commercial and industrial uses.

Features:

- 1 **ENERGY SAVING** - Energy Savings of up to 80% over our product's lifespan. Rated over 50,000 hours of use, that's about 23 years @ 6 hours/ day.
- 2 **QUICK AND EASY INSTALLATION** - The sturdy frame is easy to handle and installs directly into a grid ceiling with the built-in T-bar clips.
- 3 **HIGH PERFORMANCE** - A smooth PMMA cover allows for uniform light output at a stunning 6500 lumens to replace old fluorescent tube fixtures.
- 4 **DIMMABLE** - Our lights high quality driver allows our light to dim without any unwanted flickering, flashing or humming noise.
- 5 **DLC PREMIUM** - Hykology LED Troffer lights are DLC Premium qualified and thus eligible for state and nationwide rebate programs.


Specifications

Part No.	TFP24-50W4/5K-2/4
Power	50W
Lumen(±10%)	6500lm
Working Voltage	100-277VAC
Safety Certification	ETL&DLC Premium
Dimming Type	0-10V Dimming
PF	>0.95
Total Harmonic Distortion	Distortion:8.5%
Cdor Temperature	4000K/5000K
Lamp's Luminous	125lm/W
Cdor Rendering	Ra>80
Environment Location	Indoor,damp location
Life-Span	≥50000H
Lens	Frosted
Mounting	Recessed
Operating Temperature Range	-20℃ to 50℃
Warranty	5 years

Dimensions



Optical Properties

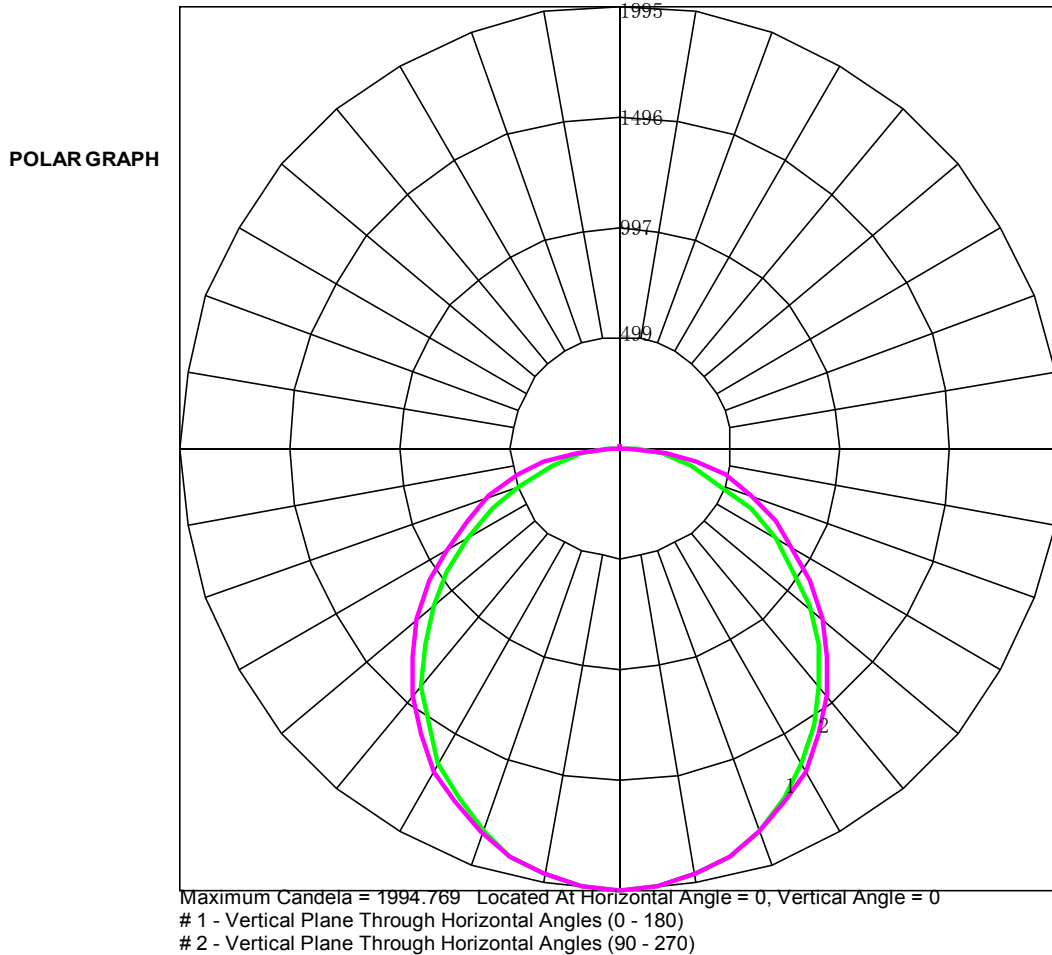

Applications

Application of LED Troffer Panel Light



Packing/weight

Part NO.	Out Carton Size(inch)	Qty/Carton(pcs)	Net Weight (lbs)	Gross Weight (lbs)
TFP24-50W4/5K-2	51.18*25.98*3.94	2	29.66	31.97
TFP24-50W4/5K-4	51.18*27.16*9.06	4	63.94	66.15