

· Standard:

Comply with ANSI/EIA RS-310-D, IEC297-2, DIN41494, PART1.Part7. DIN41941 standard

• Feature:

Peature:
Supplied as a flat pack-easy to assemble, only 1/3 of orignal assembled voume, reduce your Shipping and storage cost Galvanized back panel
Cables can be entered from top and bottom
Cooling fans can be installed on top cover and bottom panel
Toughened glass front door with over 180 turning degrees

Loading Capacity:

Static loading:60kg

Degree Of Protection: IP20


• Material:


Back panel:0.8mm galvanized plate Others: SPCC cold rolled steel. Thickness:frames,mounting profile:1.5mm; front door border:1.2mm;others:0.8mm

Surface Finish:

Degreasing, pickling, phosphoric, powder coated



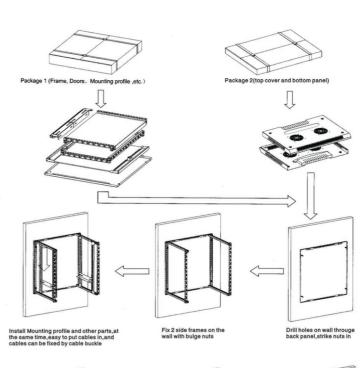



Install side panel

Install top cover

Install front door, finish assembling