


Siren Marine: Wiring Cable 2 (*Harness 2*)

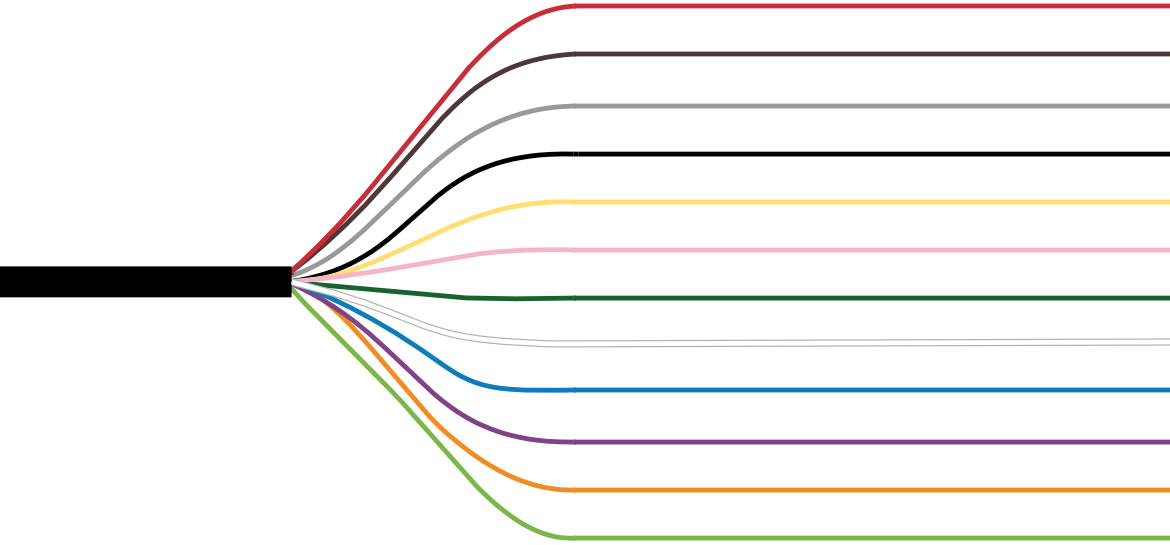

Wire Color	Input/Output	Function
Red	Output	RS422 TX+
Brown	Output	RS422 TX-
Gray	Input	RS422 RX+
Black	Input	RS422 RX-
Yellow	Input	High Water 2
Pink	Input	Security 2
Dark Green	Input	Accessory Ground
White	Output	Relay Control 3
Blue	Output	Relay Control 4
Purple	Output	Satellite Modem TX (RS232)
Orange	Input	Satellite Modem RX (RS232)
Light Green	Input	Security 3

Installation Instructions:

1. Unscrew the wiring cable connector cap on the Siren 3 Pro device to expose the cable connector (this will be labelled *Harness 2* on the back of the device).
2. Attach the wiring cable connector and device connector by matching the 12-PINs, then screw together tightly.
3. Connect selected wired sensors using Posi-Tap™ connectors, terminal block, or other connection type.