

Gfp 300 Series Top Heat Laminators

Fully featured, professional quality, affordably priced.



Sign shops and digital printers now have an affordable option for pressure-sensitive applications. The **Gfp 300 Series** laminators deliver labor-saving features, rugged construction and high quality output in an entry level machine. Building off of the 255C Cold Laminator, the **300 Series** adds **top heat** for better overlamination, mounting and board coating results. To make production easier and more efficient, they feature new 3" aluminum tube **Quick-grip film shafts** with width measurements for easy loading and alignment, **Integrated Top Liner and Rear Output Rewinds** for roll-to-roll applications, and new **Metal Alloy Tubular Heaters** to reduce breakage.

- √ Roller diameter 5"
- √ 55" and 63" widths
- √ Speed and temperature controls
- √ Foot pedal
- √ 2 Unwind supply shafts
- √ Top and rear take-up mandrels
- √ Swing up feed table
- √ Integrated top liner rewind
- √ Integrated rear rewind

- √ Variable roller gap to 1"
- √ Metal Alloy heater
- √ 3" Aluminum Quick-Grip shafts
- √ Chain drive rewinds
- √ Single pressure adjustment
- √ Machine stand with casters
- √ 38" table height output
- √ 120 volt service
- √ cTUVus safety approved




**Remington
laminations
Incorporated**

The Profitable Source for Finishing Products

Graphic Finishing Partners LLC P.O. Box 1097 Maryland Heights, MO 63043 www.gfpartnersllc.com

Choose the 300 Series Top Heat Laminators for *Overlamination Mounting Board pre-coating*

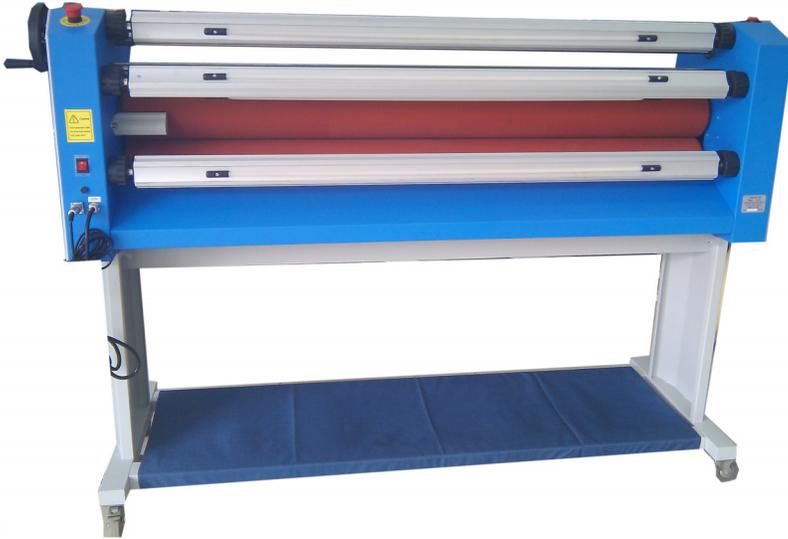

Integrated rear rewind for roll-to-roll applications



Aluminum Quick-grip shafts for easy loading and alignment

Applications

*Signs
Banners
Trade show displays
Point-of-purchase displays
Dry-erase boards
Floor graphics
Graphic mounting
Photo mounting
Window graphics
Vehicle graphics*



| <i>Specifications</i> | <i>355TH</i> | <i>363TH</i> |
|-------------------------|---------------------|-----------------|
| Laminating Width | 55" | 63" |
| Roller diameter | 5" | 5" |
| Roller gap | 1" | 1" |
| Rear rewind | Included | Included |
| Max temperature | 122° F | 122° F |
| Laminating speed | 20 ft/min | 20 ft/min |
| Unwinds | Top/Bottom | Top/Bottom |
| Liner rewind | Chain drive | Chain drive |
| Pressure adjustment | Hand wheel | Hand wheel |
| Tension adjustment | Single knob | Single knob |
| Heat method | Metal Alloy | Metal Alloy |
| Max. Roll diameter | 6" OD | 6" OD |
| Power supply | 120v 12a | 120v 13a |
| Power consumption | 1200 W | 1400 W |
| Foot pedal | Included | Included |
| Stand with casters | Included | Included |
| Net weight w/ stand | 321 lbs | 376 lbs |
| Dimensions | 72" x 23.5" x 48.5" | 80" x 23" x 48" |
| Shipping weight machine | 436 lbs | 507 lbs |
| Shipping dim. machine | 79" x 26" x 31" | 87" x 26" x 31" |
| Safety agency approval | cTUVus | cTUVus |



**Remington
laminations
Incorporated**

The Ultimate Bond and Protection!

Remington Laminations, Inc P.O. Box 3559 Grapevine, TX 76099
www.remingtonlaminations.com email: remi-sales@remingtonlaminations.com
Tel: 877-317-1716 Fax: 817-488-8770