

# XTREME POWER CONVERSION A60

Standby UPS // 120VAC

For more information, visit [www.xpcc.com/a60](http://www.xpcc.com/a60)



## Affordable, reliable power protection for valuable home and small business electronics

Power and protect your critical electronics and maintain your internet connection during power outages. Xtreme Power A60 UPS keep you connected by providing battery backup so you can continue phone calls, checking emails, and maintain home automation and security systems.

In addition, the A60-850 includes a USB charging port to charge and power your mobile devices during power outages.

For Lithium Ion UPS reference the J60 at [www.xpcc.com/j60](http://www.xpcc.com/j60)

### PRODUCT SNAPSHOT

- › Available models: 550VA, 850VA
- › Compact size and lightweight design
- › Floor, desk, or wall mount
- › UL, cUL, Energy Star, TAA Compliant
- › 3 years electronics, 3 years battery warranty (USA and Canada)

### FEATURES

**Compact design**—allows for horizontal or vertical placement; keyholes enable this lightweight UPS to be conveniently mounted on a wall

**Surge Protection** —guard your electronics against lightning, surges and spikes

**Auto restart**—after full battery discharge, the A60 automatically restarts when utility power returns

**USB Communications**—USB port enables plug and play communications between servers, desktops, and the UPS

**Touch LCD** — provides vital monitoring and precise information (850VA)

**USB Charging Port** — USB port allow you to charge your mobile devices during power outage

**\$25,000 load protection policy**—protection against damaged connected equipment

# MODEL SELECTION GUIDE


For more information, visit [www.xpcc.com/a60](http://www.xpcc.com/a60)

MODEL NUMBER		A60-550	A60-850
CAPACITY	Power rating	550VA (330W)	850VA (500W)
INPUT	Voltage	110/120VAC	
	Frequency	50/60Hz auto-sensing	
OUTPUT	Voltage	110/120VAC	
	Waveform	Simulated sine wave	
	Frequency	50Hz ± 1Hz or 60Hz	
	Transfer time	2–6ms	
BATTERY	Battery type	Sealed, maintenance free lead acid	
	Battery quantity and size	(1) 12V 4.5AH	(1) 12V 5AH
	Recharge	8 hours to 90% capacity	
PHYSICAL	UPS dimensions (W x D x H)	6.2 x 12 x 3.7 in	
	UPS weight	5.7 lbs	6.4 lbs
	Line cord	6 ft, 5-15P	
	Receptacles	(10) NEMA 5-15R receptacles (5 battery back up + 5 surge only)	
	USB charging port	N/A	USB A-type 5V, 2.4A
ENVIRONMENT	Operating temperature	32–104°F (0–40°C)	
	Humidity	0–90%	
	Altitude	11,500 ft above sea level	
INDICATORS & ALARMS	Display	3 LED's	Touch LCD
	Data Line Protection	N/A	RJ45
APPROVALS		UL, cUL, RoHS, TAA	
WARRANTY		3 years electronics, 3 years battery (USA and Canada)	
COMMUNICATIONS INTERFACE		USB and Cable	
INCLUDED IN BOX		USB Cable and User Manual	

## BATTERY RUNTIMES

System Load	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
A60-550	60	27	15	10	8	6	4.5	3	2.2	<1
A60-850	45	20	12	7.3	6	4	2.5	2	1	<1

(Runtimes are shown in minutes and will vary based on battery age and site conditions.)

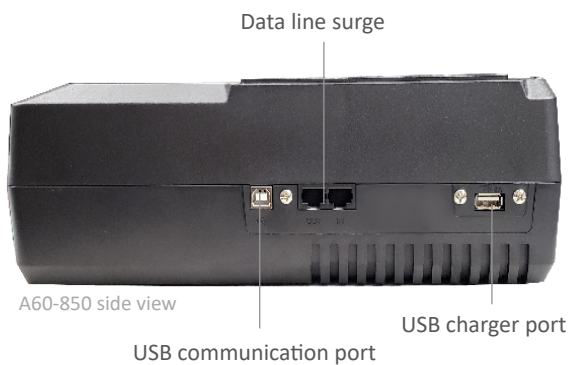

**XTREME**  
Power Conversion®

Protect your business.

XPC USA / Denver, CO / sales@xpcc.com

XPC EMEA / Rotterdam, NL / emea@xpcc.com

[www.xpcc.com](http://www.xpcc.com)

©2020 Xtreme Power Conversion Corporation. All Rights Reserved. XST.01U (Rev 3/22/21)