

Source Unit Harness Instructions


Compatible with all UTV models with a source unit.

Parts List: 1 source unit harness

Need Help? Call Tech Support: (480)-616-2299

Email: info@utvstereo.com

Go to utvstereo.com for colored installation pictures & YouTube videos.

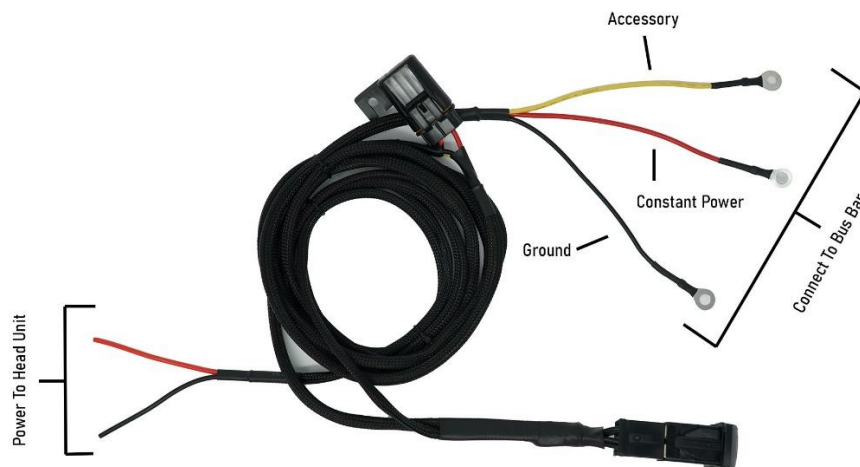

Instructions:

Step 1: Mount switch to your desired location.

Step 2: Route harness to your factory bus bar.

- **Install on Can-Am X3:** Route bus bar wires from the switch, through the center console, and to the factory bus bar.
- **Install on RZR:** Route bus bar wires from the switch, through the firewall grommet, and to the factory bus bar.

Step 3: Connect power and ground of the source unit harness to the source unit.

***Use this configuration if you want the head unit to work on Constant power controlled by rocker switch. Your head unit will work anytime regardless of key on. This is how we recommend wiring when using our 2nd battery kit.**

Pink Ring Terminal goes to constant post - Constant Power (fused by 10 amp mini)

Yellow Ring Terminal goes to ACC post - Acc Power used to light up lower LED on switch

Ground goes to Ground Post - Chassis Ground

***Use this configuration if you want the head unit to work on ACC power controlled by rocker switch. The head unit will only work when key is on.**

Pink Ring Terminal goes to ACC Post- Constant Power (fused by 10 amp mini)

Yellow Ring Terminal goes to ACC Post- Acc Power used to light up lower LED on switch

Ground goes to Ground Post- Chassis Ground

Note: If you have our UTV Stereo Can-Am X3 2nd battery kit installed in your vehicle, make sure to relocate the red power wire of the source unit harness to the red distribution block provided in the Can-Am X3 2nd battery kit.