

UTV stereo



PRO Series High Frequency Tweeters Owner's Manual

GENERAL FEATURES

OEM Direct Fit Design - Fits OEM RZR Pro Series Tweeter Housing

Threaded Body with Locking Ring for Universal Install

RGB LED Ring - Compatible with Bluetooth Controller

Crisp & Responsive Highs

Neodymium Magnet

1" Voice Coil & Premium Tetolon Dome

Built-In Crossover

THANK YOU FOR CHOOSING UTV STEREO PRODUCTS


Thank you for choosing UTV Stereo Pro-Series tweeters! Your choice of this UTV Stereo product indicates a desire for high quality music reproduction in your UTV.

UTV Stereo is your premier audio manufacturer. We offer the highest quality products for your SXS. Stay one step ahead when you purchase UTV Stereo products. Designed for high performance audio systems, these tweeters are built rugged to withstand the elements with an IP65 dustproof and water-resistant rating.


To take full advantage of the UTV Stereo Pro-Series tweeters, please read and follow the instructions in this manual.

INSTALLATION


Professional installation by an authorized UTV STEREO dealer is highly recommended! Otherwise, the performance of your new gear may not be satisfactory. In the event that you decide to do your own installation, please read and follow this manual very carefully. Failure to do so may compromise the integrity of this product or your vehicle, and possibly void this product's warranty.

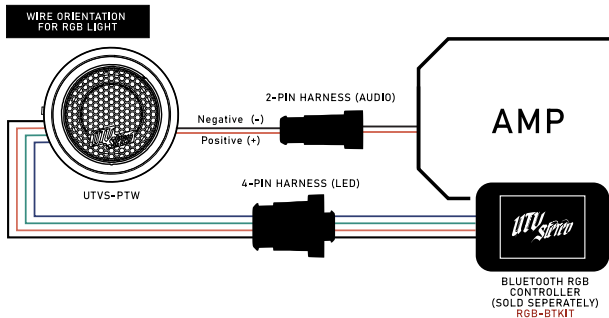


WIRE ORIENTATION FOR SINGLE RED LIGHT

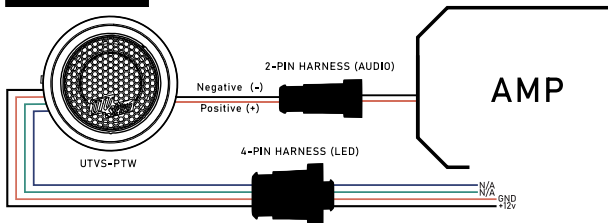

WIRE ORIENTATION FOR SINGLE GREEN LIGHT

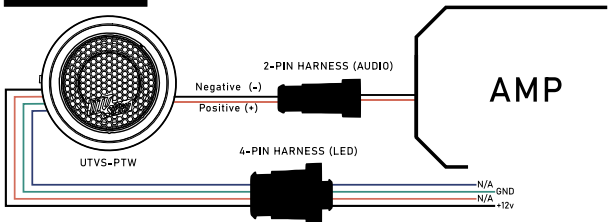

WIRE ORIENTATION FOR SINGLE BLUE LIGHT

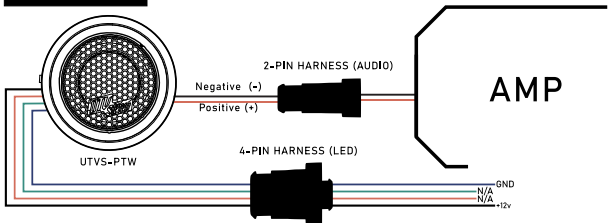

MOUNTING OPTIONS

OEM



• Figure 1 •

The included tightening ring is **NOT** required when installing into the OEM RZR Pro Series Grommets as shown in **Figure 1**.

Simply push the tweeter into the housing.

UNIVERSAL




• Figure 2 •

The included tightening ring is **REQUIRED** when installing into a custom drilled hole as shown in **Figure 2**.

WE RECOMMEND A 1 7/8" HOLE

FEATURES & SPECIFICATIONS

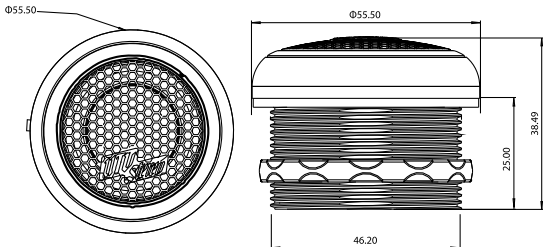

FEATURES



- 1 LED RING/CHAMBER
- 2 25MM (1") VOICE COIL & TETOLONE DOME
- 3 24MM NEODYMIUM MAGNET
- 4 BUILT-IN CROSSOVER


SPECIFICATIONS

Frequency Response:	1.2KHz-20KHz
Nominal Impedance:	4 Ohms
Sensitivity:	91dB @ 1W/1m
Continuous Power:	60W
Peak Power:	120W

BUILT-IN CROSSOVER


It is acceptable to run a full-range signal to the tweeter!
No external bass blocker needed!

BUILT-IN
CROSSOVER

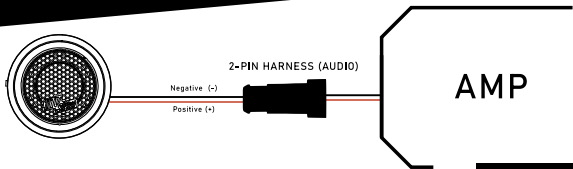


OPTION 1

OPTION 2

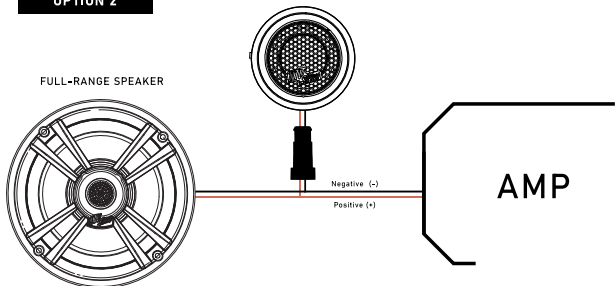

NOTES:

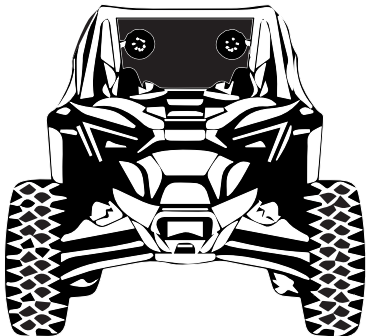

UTV STEREO

WARRANTY

Should your product require service, please consult with the dealer from which it was purchased or contact a local UTV STEREO dealer directly. Units received without an accompanying return authorization number will not be processed. Please contact your UTV Stereo dealer or contact UTV Stereo directly to obtain a return authorization number. Additionally, you must include a copy of your purchase receipt from an authorized UTV Stereo dealer for consideration of an in-warranty service. Units received without a receipt will be held for 30 days. Allowing us time to contact you and obtain a copy of the receipt. After 30 days, all units will be returned.



**DO NOT SUBMERGE THIS PRODUCT.
THIS WILL VOID YOUR WARRANTY.**

UTV STEREO and the UTV STEREO logo are registered trademarks.
All other brand names are trademarks or registered trademarks of their respective owners.
All rights reserved. Designed in USA.

Copyright © 2022 UTV STEREO

Tel. 480-616-2239
Address: 7561 East Baseline Road Mesa, AZ 85209