



**Catalog No. MCL (0.1 - 30A)**  
600Vac or Less  
Fast-Acting

Amp Ratings				
MCL				
0.1	0.75	3.5	9	30
0.125	1	4	10	—
0.2	1.5	5	12	—
0.25	2	6	15	—
0.3	2.5	7	20	—
0.5	3	8	25	—

Dimensions - inches		
Amps	Ferrule	Length
0.1 - 30	13/32	1-1/2

**MCL Specifications**

Fast-Acting

**Voltage Rating:** 600Vac

**Amp Rating:** 0.1 - 30 Amps

**Interrupting Rating:** 100kA RMS Amps

**Agency Approvals:**

(0.1 - 30) UL Listed, File E162443  
(0.1 - 30) CSA Cert., LR700489

**Benefits:**

- Compact dimensions.
- High interrupting rating.
- Fast-acting design responds quickly to both overloads and short-circuit current.

**Applications:**

- Street lighting holders, HID lighting, control circuits, electronic equipment protection.

**Recommended Fuse Blocks:** Page 151. **Recommended Inline Fuse Holders:** Page 147. **Recommended Panel Mount Holders:** Page 150.



**Catalog No. MOL (0.5 - 30A)**  
250Vac or Less  
Fast-Acting

Amp Ratings				
MOL				
0.5	2.5	6	10	25
1	3	6.5	12	30
1.5	4	8	15	—
2	5	9	20	—

Dimensions - inches		
Amps	Ferrule	Length
0.5 - 30	13/32	1-1/2

**MOL Specifications**

Fast-Acting

**Voltage Rating:** 0.5-15Amps, 250Vac  
20-30Amps, 125Vac

**Amp Rating:** 0.5 - 30 Amps

**Interrupting Rating:**

10kA @ 125Vac 20-30A  
35A @ 250Vac 0.5-1A  
100A @ 250Vac 1.5-6A  
200A @ 250Vac 6.5-10A  
750A @ 250Vac 12-15A

**Agency Approvals:**

(0.5 - 30) UL Listed, File E162443  
(0.5 - 30) CSA Cert., LR700489

**Benefits:**

- Compact dimensions.
- Economical laminated paper tube design.

**Applications:**

- Supplemental protection for non-inductive control and lighting circuits.



**Catalog No. EBS (0.2 - 10A)**  
0.2 - 5A 600Vac or Less  
6 - 10A 250Vac or Less  
Fast-Acting

Amp Ratings				
EBS				
0.2	0.8	1.8	5	10
0.4	1	2	6	—
0.5	1.5	3	7	—
0.75	1.6	4	8	—

Dimensions - inches		
Amps	Ferrule	Length
0.2 - 10	13/32	1-3/8

**EBS Specifications**

Fast-Acting

**Voltage Rating:** 0.2-5 Amps, 600Vac  
6-10 Amps, 250Vac

**Amp Rating:** 0.2 - 10 Amps

**Interrupting Rating:** 10kA RMS Amps

**Agency Approvals:**

UL Listed, File E162443  
CSA Cert., LR700489

**Benefits:**

- Compact dimensions.
- Shorter than standard midget dimensions.
- Economical design.

**Applications:**


- Supplemental protection for non-inductive control and lighting circuits.

**Recommended Panel Mount Holders:**


Refer to page 150 in this catalog.

### Average Time-Current Curve

Cat. No. MCL (Amp)

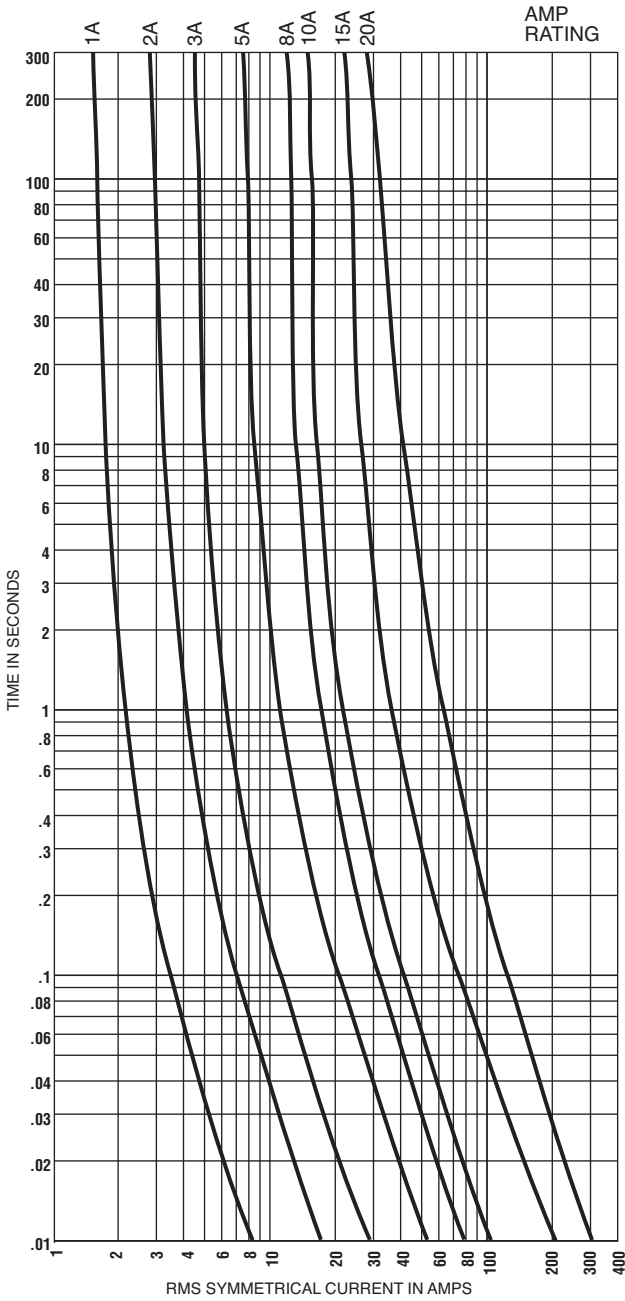

Cat. No. MOL (Amp)

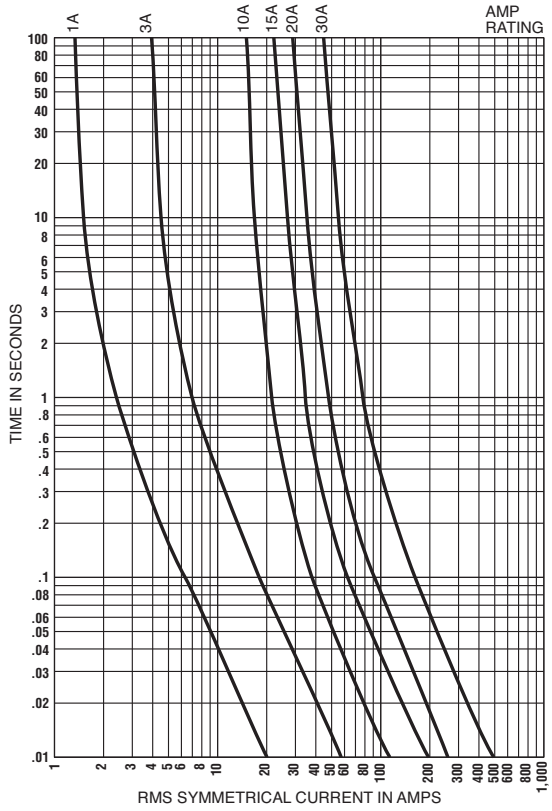

Cat. No. EBS (Amp)

