



IMPORTANT – These instructions must be read in their entirety **PRIOR TO BEGINNING THE INSTALLATION**. Failure to do so may result in damage to your firearm, stock components, and **WILL VOID YOUR PRODUCT WARRANTY**.

1. Introduction

SAFETY WARNINGS



WARNING! Before beginning the installation of your Adaptive product, make sure the firearm is **UNLOADED** and cleared of live rounds. Read the instructions thoroughly and be sure that you understand them completely. A copy of these instructions may also be found online at www.adaptivetactical.com

OPERATION AND MAINTENANCE

These instructions do not replace your firearm owner's manual; refer to your owner's manual for instructions related to the specific operation and maintenance of the firearm.

Replacement Parts

Replacement parts for Adaptive products are available for purchase online at www.adaptivetactical.com

Cleaning Product Components

To clean components, wipe down with cleaners and/or lubricants designed specifically for firearms. Avoid using solvents on any rubber components.

Camouflage Finishes

Avoid using abrasive or solvent cleaners and/or lubricants on camouflage finishes.


BEFORE YOU GET STARTED

IMPORTANT: This Adaptive product is designed and engineered to work with Mil-Spec extension tubes *only*. Do not attempt to retrofit your product onto Commercial extension tubes, which will void the related factory warranty and could result in an unsafe or potentially deadly scenario.

Mil-Spec tubes may be identified by the diameter of the tube (see the cross section illustrations below) and the ability of the stock to slide over the tube.

The stock will slide easily over Mil-Spec tubes with minimal friction, but will **NOT** fit on wider diameter Commercial tubes.

Tightness of fit may vary due to differences in tube and stock dimensions.



Mil-Spec Tube
1.15"



Commercial Tube
1.17"

2. Customer Service / Warranty

HELP WITH THIS PRODUCT

IMPORTANT! DO NOT RETURN PRODUCT TO STORE! If you are having problems, please contact Adaptive Tactical at 208-442-8000

Please visit www.adaptivetactical.com for a list of frequently asked questions and troubleshooting information regarding this product. Instructional videos are also available online.

WARRANTY / DISCLAIMERS

Improper installation of Adaptive parts, including but not limited to, barrel, stock forend, attachment hardware or any other supplied part or accessory will void the warranty for this product.

Except for defects in materials or workmanship, your Adaptive product is sold "AS IS" and "WITH ALL FAULTS."

To the extent allowed by law, Adaptive specifically disclaims any expressed or implied warranties, including but not limited to warranties of merchantability and fitness for a specific purpose. We disclaim any responsibility for damage or injury that may result from any modifications or changes that are NOT part of the Adaptive product as delivered from the factory.


3. Stock Installation

REMOVE FACTORY STOCK

1. Verify firearm is unloaded. With rifle pointing in a safe direction and fingers outside trigger guard, remove magazine, open bolt and confirm (visually and by touch) that chamber is empty. Allow bolt to close.
2. Remove existing adjustable stock. Adjust stock to the longest length and then pull firmly downward on the adjustment lever to disengage locking pin from extension tube. With lever still pulled downward and pin completely disengaged from locking holes in extension tube, slide stock off rear of extension tube.

INSTALL EX PERFORMANCE STOCK

3. Slip front opening of stock over rear of extension tube until it stops. With thumb and fingers, grasp the side "War Horse" cover plates of the Adjustment Lever assembly (A) and pull firmly downward. With adjustment lever assembly pulled downward, slip stock forward onto extension tube.

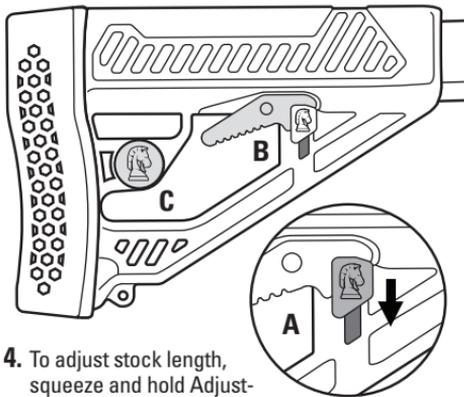

4. To adjust stock length, squeeze and hold Adjust-ment Lever (B). Slide rear portion of stock to desired length and release lever. Rear-stock will automatically engage at the nearest corresponding position. To ensure pin engagement prior to shooting, push or pull on rear portion of stock.
5. Mount the QD Swivel on the preferred side of the stock. The stock is factory configured for right hand swivel use. To modify QD Swivel placement, remove the Warhorse cover plate (C), remove screw using a 3/32" hex key, insert swivel on the desired side, then reinsert and fasten the screw.