

E36 RACE CAMBER PLATE INSTRUCTIONS

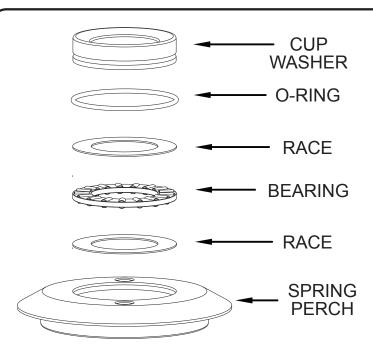

- CLEAN AND DISASSEMBLE ALL COMPONENTS IN SPRING PERCH
- GREASE BEARING USING HIGH TEMP MARINE GREASE
- ENSURE GREASE FILLS HOUSING OF BEARING
- CLEAN O-RING SEATS
- LUBRICATE O-RING AND RE-INSTALL INTO CUP WASHER
- INSTALL COMPONENTS INTO SPRING PERCH
- LUBRICATE TOP SURFACE OF CUP WASHER

TWO BOLTS ARE USED ON THE SIDE NEAREST TO THE FRONT OF THE CAR

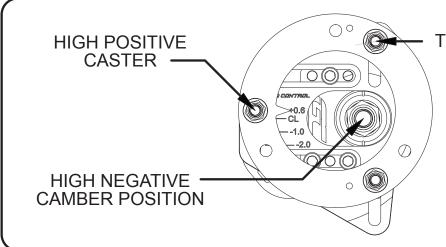

TORQUE TO 18 FT/LBS

GROUND CONTROL

www.groundcontrolstore.com 3885 Dividend Drive Shingle Springs, CA 95682 (530)677-8600 fax (530)677-9090