

## OPTIONAL REMOVAL OF STOCK SPRING PERCH

CUT TO REMOVE PERCH.  
USE CAUTION NOT TO  
CUT INTO STRUT TUBE.

DO NOT REMOVE WELD.  
KEEP ABOUT 1/8" TO 1/4"  
OF MATERIAL WITH  
WELD.

USE REMAINING WELD  
LEFT FROM PERCH TO  
SUPPORT STEEL RING.

**GROUND CONTROL**


www.groundcontrolstore.com

3885 Dividend Drive

Shingle Springs, CA 95682

(530)677-8600 fax (530)677-9090

STOCK SPRING PERCH MAY  
BE REMOVED TO  
ACCOMMODATE STEEL RING  
ALLOWING CAR TO BE  
LOWERED AND MORE TIRE  
CLEARANCE

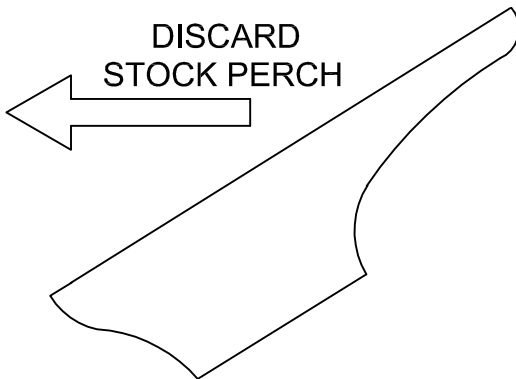

USE CAUTION NOT TO  
CUT INTO STRUT TUBE / BODY  
CUT JUST ABOVE WELD

