

## **Universal Rally Flap Installation Guidelines\***


## \*Professional installation is recommended\*


- 1-Use the following pictures from our other vehicle installations as guidelines for your vehicle installation. (NOTE: Installation methods and hardware will vary depending you your vehicle make, year and model)
- 2-While Front flap installation can be accomplished by turning front wheels for easier access, Rear flap installation may require removal of rear wheels.
- 3-You will need to source your own hardware for mounting on your specific vehicle based on what would be the best mounting solution. Hardware may include, but is not limited to:

Metal and/or plastic u-clips or speed nuts, stainless steel self tapping screws, stainless steel washers, plastic expansion push retainers, spacers (can be made by cutting reinforced rubber hose).

(Use images below as a guide)



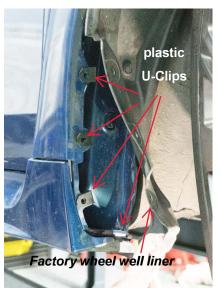

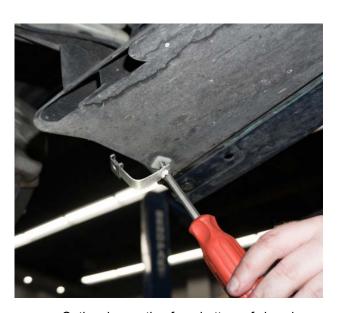

Optional mounting from bottom of chassis




Check flap alignment prior to tightening fasteners












NOTE: Spacers can be made by cutting rubber hose to length needed.

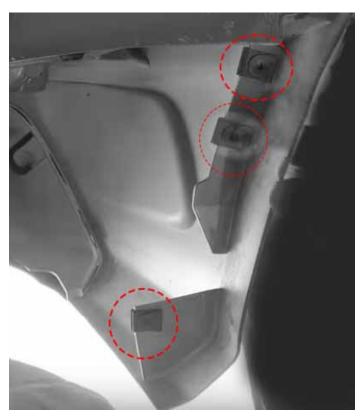

Metal U-clips for fastening