

ABSENT ESSENTIAL




ID CODE: 41

It represents a **high-quality, essential and efficient back light lighting solution** for offices or public spaces. Suitable for recessed, ceiling or suspended installation with several size that make it versatile to every context.









Design
esse-ci

FEATURES

-  Direct Emission
-  UGR <19
-  IP 40




LED

-  3000K/4000K
-  >115 lm/W
-  CRI >90
-  Eye safety: RG0/RG1
-  Mac Adams 3
-  L80/B10 >50.000h

CERTIFICATIONS

-  CE
-  A+
-  5 years warranty

ON REQUEST

-  DALI - RDD code (verify the version)
-  Emergency kit 1/3 hour EM/EM.3h code
-  False ceiling structure 625x625mm

Optic DPL technology diffuser to control glare UGR <19.

Body Steel plate body with epoxy powder coating.







ABSENT ESSENTIAL DPL

OPTIC

Diffuser in Diamond Prism LED (DPL) Technology with UGR<19 for ambient with display screen equipment.



IP 40 A'

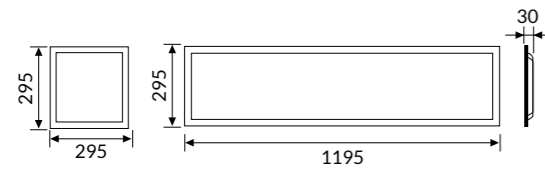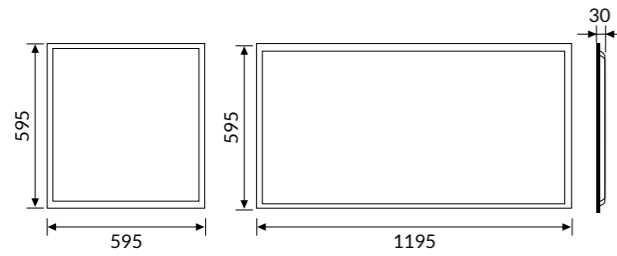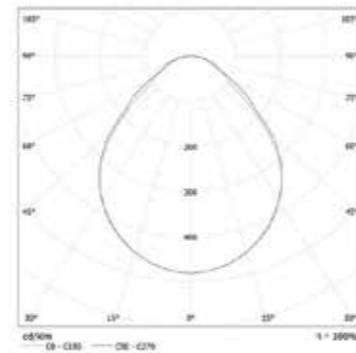

COLOUR TEMPERATURE

4000K

3000K

COD	💡	lm	mm
41DPL18L490E	18W	1750	295x295
41DPL36L490E	36W	4140	595x595
41DPL22L490EM3	22W	2150	595x295
41DPL36L490EM3	36W	4140	1195x295
41DPL60L490EM6	60W	7150	1195x595

COD	💡	lm	mm
41DPL18L390E	18W	1610	295x295
41DPL36L390E	36W	3809	595x595
41DPL22L390EM3	22W	1978	595x295
41DPL36L390EM3	36W	3809	1195x295
41DPL60L390EM6	60W	6578	1195x595


Accessories



41AA17E
Kit for installation on plasterboard.



41AA1330E
Single wire 3000mm long adjustable suspension kit.

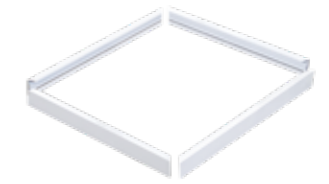

41AAE600600
41AAE600300
41AAE1200300
41AAE1200600
Kit for ceiling installation.




00AA16
3 pole-powered supply box.
Cable length 2000mm.



00AA165P
5 pole-powered supply box.
Cable length 2000mm.

Technical Note

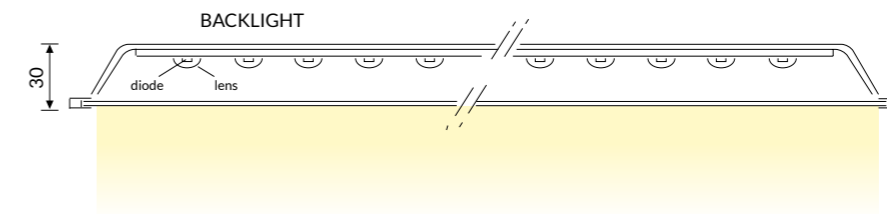

HOMOGENEOUS EMISSION UGR<19