

SUP FOLDING RACK

Model # 12-8602



Scan* to see
Video Instructions
for Assembly & Use

*QR code reader app required

Holds up to 75 LBS

PARTS LIST

| Qty | Name |
|-----|--------------------------|
| 2 | SUP Folding Rack—Yellow |
| 8 | Plastic Mounting Bracket |
| 8 | Mounting Screw |
| 4 | Plastic Anchor |
| 4 | Wall Extension Plates |

Mounting Rack to Wall

Tools Needed: Tape Measure, Electric Drill, $\frac{1}{8}$ " Drill Bit, #2 Phillips Head Driver, Stud Finder

The length of your SUP will determine arm spacing. Ideal arm spacing is 40% of total SUP length, (SUP length x 0.4 = spacing).

Locate studs where arms will be mounted and mark desired height for the *SUP Folding Rack* at base of support arm. Use a *mounting bracket* as a template, and a *mounting screw* to mark the locations for holes. Wall studs are typically on 16" centers. It is important that at least one screw from each *mounting bracket* goes into a wood stud. *Screwing only into drywall is not sufficient and could result in injury to self and SUP.*

1. Pre-drill pilot hole for *Phillips Head screw* using a $\frac{1}{8}$ " drill bit.
2. The second hole will typically miss a single stud (see **Photo #1**). Insert a *plastic anchor* into the hole. **Note:** *If you were lucky and hit a stud on both holes, skip this step.*



Pro Tip: An old woodworkers trick is to rub the screw threads on a bar of soap for easy installation.

(continued next page)

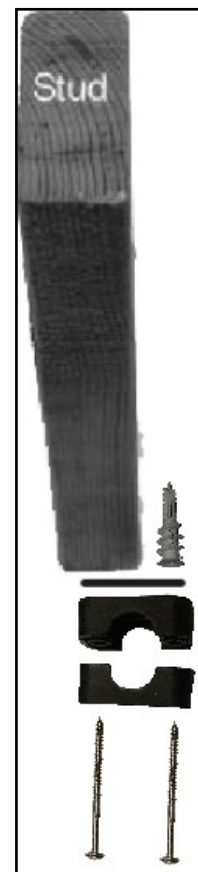


Photo #1

Rev. 8/19

FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

P. 1

OUR PLEDGE TO YOU

Suspenz® products are warrantied for life against defects in material or workmanship to the original owner. Product must be used for its intended purpose under normal conditions. Please visit www.Suspenz.com for complete warranty information.

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350



CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM

SUP FOLDING RACK

Model # 12-8602

Instructions, Continued

3. Insert a *mounting screw* through 2 *mounting brackets* and one *Wall Extension Plate*. Use #2 Phillips Head Driver to screw into the stud (see **Photo #2**).
4. Leave loose for insertion of arm.
5. Insert rack arm in mounting bracket and insert second screw into bracket and into *plastic anchor*. Tighten both screws. Repeat for upper bracket installation (**Photo #3**)
6. Repeat steps 1-5 for mounting of second arm.

Photo #2



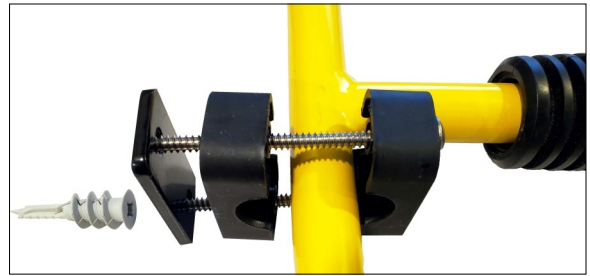


Photo #3

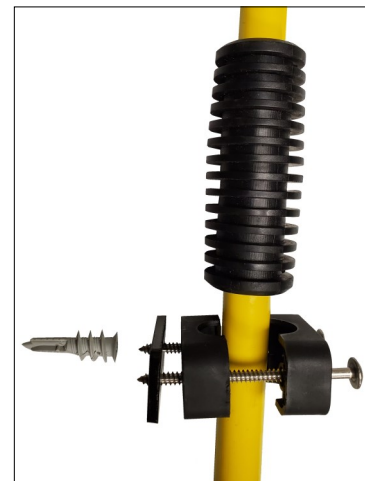

Use

- Arms fold against wall when not in use and pivot out from wall when ready to use.

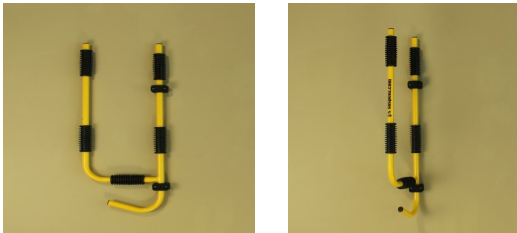

- Paddles & PFD's can be stored on lower hook.
- Rubber pads are adjustable



FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

P. 2

OUR PLEDGE TO YOU

Suspenz® products are warranted for life against defects in material or workmanship to the original owner. Product must be used for its intended purpose under normal conditions. Please visit www.Suspenz.com for complete warranty information.

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350



CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM