

ONE N' ONLY CART

Model # 22-0123




PARTS LIST	
Qty	Name
2	Support Arm
2	Stabilizer
2	Plate
1	X-Plate
2	10" Airless Wheel
2	Cart Pin
1	Strap
4	Carriage Bolt
4	Knob

Holds up to 150 LBS


Assembly Step 1

PARTS NEEDED

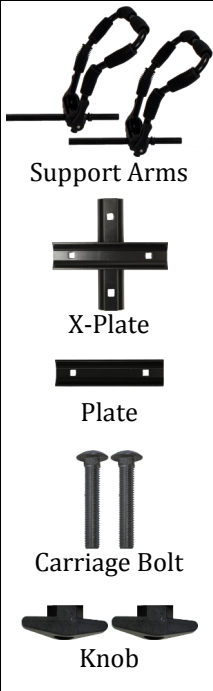

Assemble Main Frame

1. Unlock levers on both sides of *Support Arms*. Open so that the base of the arms are facing up. See Photo.
 2. Attach the *Support Arm* bars together, place *X-Plate* on bottom and a *Plate* on top. Match up the holes.
- Note:** There are two holes on the bars to allow for boat width adjustment.
3. *Carriage Bolt* goes through *Plate*, *Support Arm* bars and *X-Plate*, then tighten with *Knob* on the underside of bars. Repeat with 2nd *Support Arm* bar.

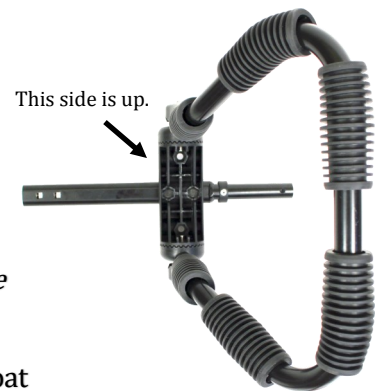

Scan* to see
Video Instructions
for Assembly & Use
or

Visit Suspenz.com
"Video & Manual" page

*QR code reader app required

Rev. 09/15

FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350



CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM

Step 2

PARTS NEEDED



Stabilizer



Plate



Carriage Bolt



Knobs

Assemble Main Frame Continued:

1. Line up holes on *Stabilizers* bars with holes on the bottom *X-Plate*.
2. Place 2nd *Plate* under *Stabilizers* bars lining up the holes.
3. *Carriage Bolt* goes through *X-Plate*, *Stabilizer* bars and *Plate*, then tighten with *Knob* on the underside of bars. Repeat with 2nd *Stabilizer* bar.

Note: SUPs rest on the *Stabilizers*. It also acts as a "kickstand" when using with boats.



Step 3

PARTS NEEDED



Wheel



Cart Pin

Attach Wheels to Main Frame:

Slide *Wheels* onto axle and place *Cart Pins* in hole next to tire then flip the *Cart Pin* over the end of axle to secure the pin.



To Load Boat

Adjust *Support Arms* to proper width to hold the boat/SUP. Open arms wider for larger boats or adjust to an upright position to support SUP.

Pedal Kayak



Canoe



2 SUPs



Use

You can carry 1 boat or up to 2 SUPs at one time .



Pedal Kayak



Canoe



2 SUPs


To Secure Boat

PARTS NEEDED



Strap

1. Loop *Strap* around both *Support Arms* and top of watercraft.
2. Thread end of *Strap* through buckle as shown then pull firmly to secure.
3. Lift one end and away you go!



Pull strap firmly to secure.

Care

Rinse cart after each use to clean off sand, salt and mud.

Caution

This cart is designed for hand towing only. It is not intended to be pulled behind a bicycle or motorized vehicle.



Strap must be used at all times when cart is in use.

FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

OUR PLEDGE TO YOU

Suspenz® products are warrantied for life against defects in material or workmanship to the original owner. Product must be used for its intended purpose under normal conditions. Please visit www.Suspenz.com for complete warranty information.

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350



CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM