

DLX STRAP STORAGE SYSTEM

Model # 40-4011



PARTS LIST	
Qty	Name
2	Padded Storage Strap
6	Philips Head Screw
6	Plastic Anchor


Holds up to 100 LBS

Mounting Instructions

Tools Needed : Tape Measure, Electric Drill, $\frac{1}{8}$ " Drill Bit, $\frac{7}{32}$ " drill bit for Drywall, Hammer and a Bar of Soap

The length of your boat will determine Strap spacing. Ideal Strap spacing is 40% of total boat length, (boat length X 0.4 = spacing).

1. Locate the wall studs where DLX Strap Storage System will be mounted.
2. Use the mounting plate as a template to mark the hole locations. Push a mounting screw into wall to mark the locations for holes.
3. Rub screw threads on the bar of soap for ease of installation.
4. Use the $\frac{1}{8}$ " drill bit to drill all 3 holes. It is important that at least 2 screws from each mounting bracket goes into a wood stud. If you missed the stud with the third hole, use the $\frac{7}{32}$ " drill bit to enlarge the hole for plastic anchor. Use a hammer or other blunt instrument to tap a plastic anchor into the drywall hole. Drill screw through bracket and into plastic anchor. **Note:** Take care not to over tighten the screw in the plastic anchor. Extra plastic anchors are supplied should this occur. See Photo.
5. Adjust the strap lengths to gently cradle your boat.

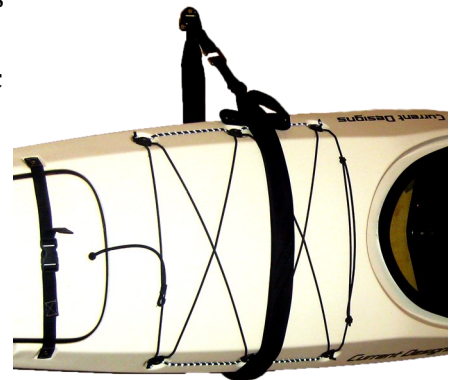

Rev. 09/16

FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

OUR PLEDGE TO YOU

SuspENZ® products are warranted for life against defects in material or workmanship to the original owner. Product must be used for its intended purpose under normal conditions. Please visit www.SuspENZ.com for complete warranty information.

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350



CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM