

Z-RACK FOR KAYAK / SUP

Model # 97-1102



PARTS LIST	
Qty	Name
2	Z-Rack Arms with safety straps
4	Phillips Head Bolts
1	Offset Screwdriver

There are 3 ways to mount the rack:

- A. Wall
- B. Free-Standing Frame Direct (*Frame sold separately*)
- C. Free-Standing Frame with Brackets (*Frame sold separately*)

A. Mounting to Wall

Tools Needed : Tape Measure, Electric Drill, $\frac{3}{16}$ " Drill Bit, #3 Phillips Head

The length of your SUP or kayak will determine arm spacing. Ideal arm spacing is 40% of total boat length, (boat length X 0.4 = spacing).

1. Locate studs where arms will be mounted and mark desired height for the arms. Push a mounting screw into wall to mark the locations for holes. Wall studs are typically on 16" centers. *Screwing only into drywall is not sufficient and could result in injury to self and SUP or Kayak.*

Pro Tip: An old woodworkers trick is to rub the screw threads on a bar of soap for easy installation.

2. Pre-drill pilot hole for Phillips Head screw using a $\frac{3}{16}$ " drill bit.
3. Use the #3 Phillips Head Driver to insert top screw. Initially, leave top screw loose (helps when locating hole for lower screw). Use offset screwdriver to insert bottom screw. After inserting bottom screw, tighten both screws.
4. Mount second arm at same height as first arm.

Rev. 01/21

FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350



CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM


Z-RACK FOR KAYAK / SUP



B. Free-Standing Frame: Direct

Tools Needed : Two ½" Wrenches *or* one ½" Wrench and one #5 Allen Wrench

Using mounting hardware supplied in free-standing frame box, insert bolts through holes in arms then into the frame and tighten securely.

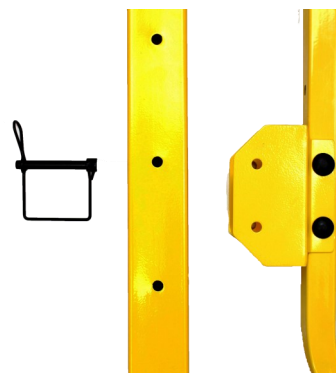

*Not shown
with Z-Rack*

C. Free-Standing Frame: with Brackets

Tool Needed : ½" Wrench

Attach Free-Standing bracket using instructions provided with the bracket. Attach arms to the frame using the locking pin. The locking pin can be inserted in either top or bottom hole of bracket for more exact positioning.

Note: Brackets sold separately: Model # 31-5502

Optional:

Free-Standing Frame sold separately

Model #32-0601



FOR TECHNICAL ASSISTANCE OR REPLACEMENT PARTS: CALL 866.787.7369

OUR PLEDGE TO YOU

SuspENZ® products are warranted to the original owner against defects in material and workmanship when used for its intended purpose under normal use and conditions for one year. It is at the discretion of SuspENZ to repair or replace any defective product.

SUSPENZ®, INC.
8725 ROSWELL ROAD #0-220
ATLANTA GA 30350



CUSTOMER SERVICE: 770-518-0045
FAX: 770-518-8507
WEBSITE: WWW.SUSPENZ.COM