


Description	Value
General information:	
Product name:	CMB 1-36 I-C-A-A-P-A
Product No:	98244555
EAN number:	5711491989570
Price:	AUD 1233
Technical:	
Pump speed on which pump data are based:	2900 rpm
Rated flow:	1.7 m³/h
Rated head:	24.2 m
Maximum head:	36 m
Impellers:	4
Code for shaft seal:	AVBE
Approvals:	CE
Model:	A
Return valve:	YES
Start pressure:	1-5 bar
Materials:	
Pump housing:	Stainless steel
Pump housing:	EN 1.4301
Pump housing:	AISI 304
Impeller:	Stainless steel
Impeller:	EN 1.4301
Impeller:	AISI 304
Code for rubber:	EPDM
Installation:	
Maximum ambient temperature:	60 °C
Maximum operating pressure:	10 bar
Pipe connection standard:	WHITWORTH THREAD RP
Type of inlet connection:	RP
Type of outlet connection:	R
Size of inlet connection:	1
Size of outlet connection:	1
Liquid:	
Pumped liquid:	Water
Liquid temperature range:	0 .. 60 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Rated power - P2:	0.5 kW
Mains frequency:	50 Hz
Rated voltage:	1 x 220-240 V
Maximum current consumption:	3.1-2.8 A
Rated speed:	2730-2740 rpm
Enclosure class (IEC 34-5):	IP55
Insulation class (IEC 85):	F
Built-in motor protection:	TP 211
Length of cable:	1.5 m
Power plug:	AU
Others:	
Net weight:	14.4 kg
Gross weight:	18 kg
Sales region:	Australia
Country of origin:	TW
Custom tariff no.:	84137090621519197



Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

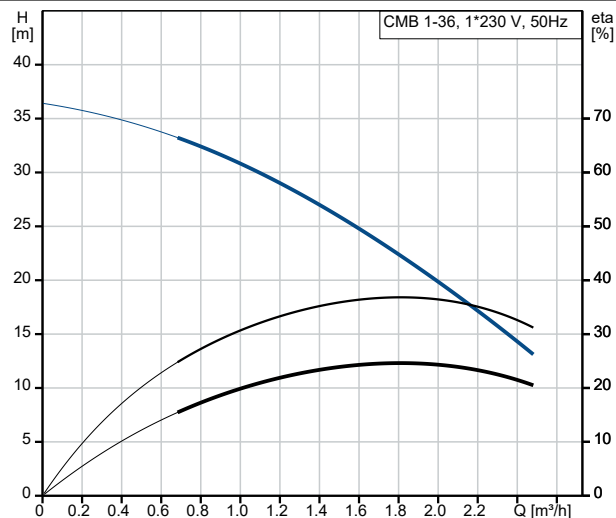