

WATER FEATURES

Always here to help...

1300 278 283

sales@aquatecequipment.com

@TeamAquatec

www.aquatecequipment.com



Acrylic Waterwalls - 30mm Lip Internal Installation

AQUAEDGE Clear Edge Waterwalls will produce both sheer descent and projecting sheet waterwall effects and with the AQUAEDGE double baffle system you are guaranteed the most consistent smooth sheet of water.

FEATURES

- » INDIVIDUALLY TESTED
- » SUITABLE FOR PROJECTING & SHEER DESCENT EFFECTS
- » SUITABLE FOR POND FEATURE OR SWIMMING POOL USE



Acrylic Waterwalls - 30mm Lip


Code	Description	Size (mm)	Entry	Inlet/s
05PW146	AQUAEDGE Acrylic Waterwall - 30mm Lip	900	Bottom	1
05PW146BA	AQUAEDGE Acrylic Waterwall - 30mm Lip	900	Back	1
05PW147	AQUAEDGE Acrylic Waterwall - 30mm Lip	1200	Bottom	2
05PW447BA	AQUAEDGE Acrylic Waterwall - 30mm Lip	1200	Back	2
05PW148	AQUAEDGE Acrylic Waterwall - 30mm Lip	1500	Bottom	2
05PW148BA	AQUAEDGE Acrylic Waterwall - 30mm Lip	1500	Back	2

ADDITIONAL INFORMATION


Type Available	Grey acrylic / clear lip
Nozzle/Lip Size	30mm
Nozzle/Lip Thickness	15mm (3mm opening)
Length	300mm,600mm,900mm,1200mm and 1500mm
Height	86mm
Width	70mm (80mm on back entry)
Recommended flow rate	Projecting waterwall – 6000 Litres per hour per metre for correct flow at the height of the trough. Sheer descent waterwall – 3000 Litres per hour per metre for correct flow at the height of the trough.
Inlet	Bottom or Back entry
Inlet Size	32mm female PVC Socket
*When Ordering, please specify bottom or back entry.	



Available in Back or Bottom Entry
* Please specify when ordering

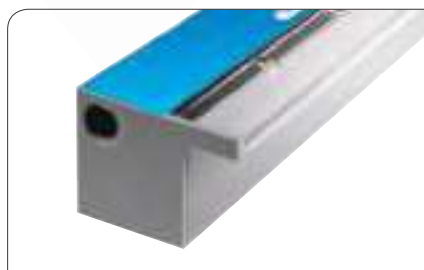

Stronger/thicker clear edge

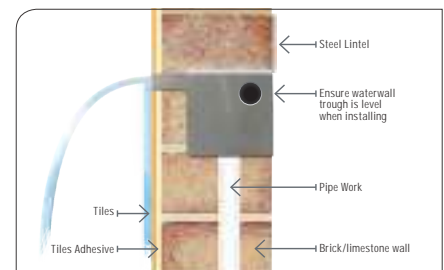

Installation suggestion

IMPORTANT INFORMATION

- Do not apply torque to the fittings
- Never leave Clear Edge Waterwalls in direct sunlight before or during installation
- All fittings and unit need to be supported so fittings or unit aren't stressed
- Always test the set up before gluing joins or filling the wall cavities in

WATER FEATURES

Always here to help...

1300 278 283

sales@aquatecequipment.com

@TeamAquatec

www.aquatecequipment.com



Acrylic Waterwalls - 125mm Lip External Installation

AQUAEDGE Clear Edge Waterwalls will produce both sheer descent and projecting sheet waterwall effects and with the AQUAEDGE double baffle system you are guaranteed the most consistent smooth sheet of water.

FEATURES

- » INDIVIDUALLY TESTED
- » SUITABLE FOR PROJECTING & SHEER DESCENT EFFECTS
- » SUITABLE FOR POND FEATURE OR SWIMMING POOL USE



Acrylic Waterwalls - 125mm Lip


Code	Description	Size (mm)	Entry	Inlet/s
05PW142	AQUAEDGE Acrylic Waterfall - 125mm Lip	900	Bottom	1
05PW142BA	AQUAEDGE Acrylic Waterfall - 125mm Lip	900	Back	1
05PW143	AQUAEDGE Acrylic Waterfall - 125mm Lip	1200	Bottom	2
05PW143BA	AQUAEDGE Acrylic Waterfall - 125mm Lip	1200	Back	2
05PW150	AQUAEDGE Acrylic Waterfall - 125mm Lip	1500	Bottom	2
05PW150BA	AQUAEDGE Acrylic Waterfall - 125mm Lip	1500	Back	2

ADDITIONAL INFORMATION


Type Available	Grey acrylic / clear lip
Nozzle/Lip Size	125mm
Nozzle/Lip Thickness	15mm (3mm opening)
Length	300mm, 600mm, 900mm, 1200mm and 1500mm
Height	86mm
Width	70mm
Recommended flow rate	Projecting waterwall – 6000 Litres per hour per metre for correct flow at the height of the trough. Sheer descent waterwall – 3000 Litres per hour per metre for correct flow at the height of the trough.
Inlet	Bottom entry
Inlet Size	32mm female PVC Socket



Available in Bottom Entry Only

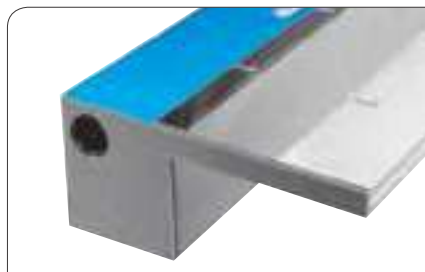

Stronger/thicker clear edge

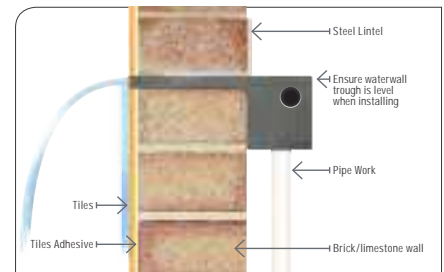

Installation suggestion