

SUBMERSIBLE SEWAGE PUMPS

Model Numbers: D75KA, D150K, DT08K, DT15K, DT22K, DT37K, DT55K & DT75K

DEPEND ON
DAVEY

WATER PRODUCTS



SUMP PUMPS

PRODUCT DESCRIPTION

High head single channel sewage handling submersible sump pumps with cutting impeller, available with a choice of single or three phase motors.

APPLICATIONS

- Sewage water pumping
- Sump emptying
- Septic effluent disposal
- Water transfer
- Pumping of light slurries and factory waste
- Pumping waste water with stringy or long soft solids in suspension

FEATURES & BENEFITS

Corrosion resistant 304 stainless steel shaft, motor shell and fasteners

- Long service life
- Attractive, lasting appearance

Open impeller, single channel, centrifugal design with cutting leading edge

- Able to pump soft solids in suspension
- Less susceptible to blockage
- Capable of higher heads / pressure
- Able to cut string like materials, reducing the risk of blockage in pump or pipework

Double mechanical shaft seal in oil bath with hard faced silicon carbide / ceramic seal on pump side

- Added motor protection
 - Long service life
- Sand slinger lip seal
- Added protection
 - Long service life

Automatic resetting thermal overload

- Protected against overloading

D75KA model fitted with automatic float switch with a present float length

- Safe unattended operation

All units fitted with 10m harmonized cable with bared ends

- Easy connection to power supply
- Long life in dirty water

Mounting base fitted

- For a firm and stable positioning during installation and operation

Slide rail kits available

- For easy removal and re-installation


OPERATING LIMITS

Capacities to	2150 lpm
Heads to	32 m
Max. submergence	25 m
Max. operating temperature	40°C
Max. soft solids	up to 80% of discharge size

Suitable Fluids

Semi-screened sewage or "grey water" of neutral pH containing up to 20% small soft solids or 1% string like solids. Some wear should be expected while pumping hard solids in suspension.

Note: Cutter pumps are not suitable for sanitary products - use Grinder models.



Cutter Type 'K' Series

TECHNICAL SPECIFICATIONS

MATERIALS OF CONSTRUCTION

PART	MATERIAL
Impellers	Cast Iron
Cutting tip	Tungsten carbide
Diffuser plate	Hardened case iron
Pump casing	Cast iron
Outlet	Cast iron
Shaft seal pump side	Silicon carbide/ceramic
Shaft seal motor side	Carbide/ceramic
	Mechanical seals in captive oil bath with oil seal
Shaft seal elastomer	Nitrile rubber
Pump shaft	304 stainless steel
Orings	Nitrile rubber
Motor shell	304 stainless steel
Handle	304 stainless steel
Fasteners	304 stainless steel
Float & power supply leads	HO7RNF-Oil resistant


ELECTRICAL DATA

Common to all models	
Speed	2 pole, 2850rpm
Insulation class	Class F
IP rating	X8
Electrical lead	HO7RNF x 10m length


	D75KA	D150KA	DT08KA
Supply voltage	220-240V	220-240V	380-415V
50Hz - Phase	Single	Single	Three
Output power	0.75kW	1.5kW	0.75kW
Full load current	7.5A	13.0A	1.7A
Locked rotor current	22.5A	65.0A	10.5A
Starting	CSIR	CSIR	DOL

	DT15K	DT22K	DT37K	DT55K	DT75K
Supply voltage	380-415V				
50Hz - Phase	Three				
Output power	1.5kW	2.2kW	3.7kW	5.5kW	7.5kW
Full load current	3.0A	4.5A	7.5A	12.3A	16.5A
Locked rotor current	22A	31.5A	49A	66A	78A
Starting	DOL				

HYDRAULIC PERFORMANCE

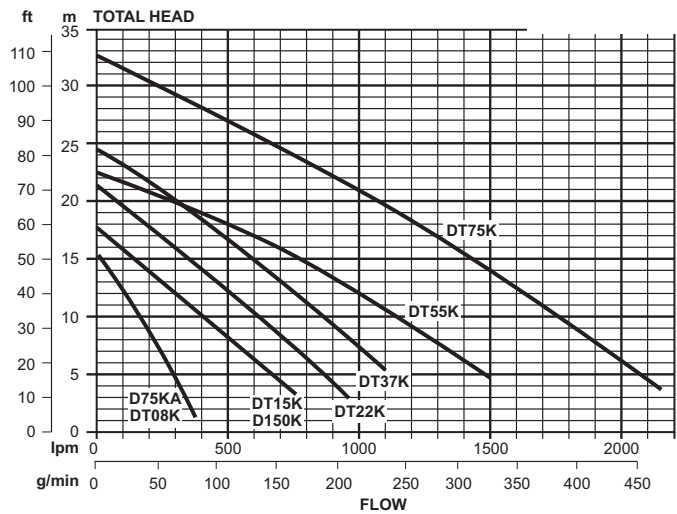

DIMENSIONS

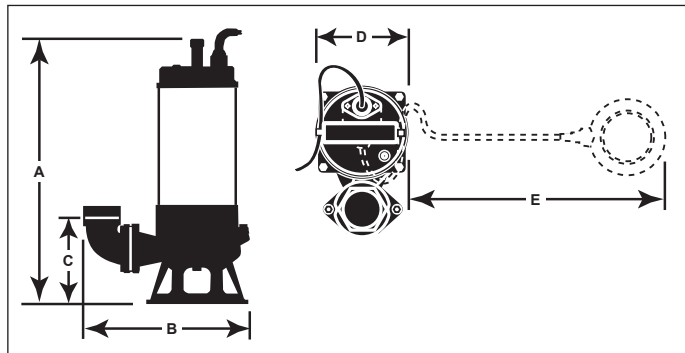

Model	A	B	C	D	E	B.S.P.	Net Weight (kg)
D75KA	495	310	160	195	330	2" F	30.0
DT08K	435	310	160	195	N/A	2" F	28.5
D150K	505	385	180	240	N/A	3" F	41.0
DT15K	470	385	195	240	N/A	3" F	37.0
DT22K	520	405	190	240	N/A	3" F	47.0
DT37K	555	405	210	250	N/A	3" F	52.0
DT55K	690	570	315	260	N/A	4" F	85.0
DT75K	760	645	340	260	N/A	4" F	90.0

All dimensions in mm unless otherwise stated.

INSTALLATION & PRIMING

Use a rope to position and retrieve the pump. Do not lower or retrieve the pump using the power lead as this may damage the cable entry seals, causing water leaks and unsafe operation. Don't use this product for recirculating or filtering swimming pools, spas, etc. While these pumps are built to high safety standards, they are not approved for installations where people will be in the water while they are operating. Don't pump abrasive materials. Sand and grit in the water being pumped will accelerate wear, causing shortened pump life. Keep your pump clean, particularly in situations where lint, hair or fibrous materials may get bound around the pump shaft. Regular inspection and cleaning will extend pump life. Make room for the float switch to operate. Automatic models have a float switch to turn them on when the water level rises and turn them off again when it has been pumped down to the safe operating level of the pump. If the float switch is not free to rise and fall, correct pump operation may not be possible. Don't run your pump dry. Non-automatic models must be switched off manually or by way of an external float/level switch when the water level is reduced to the top of the pump housing.

DEPEND ON
DAVEY

WATER PRODUCTS

Davey Water Products Pty Ltd
Member of the GUD Group
ABN 18 066 327 517

AUSTRALIA
Head Office and Manufacturing
6 Lakeview Drive,
Scoresby, Australia 3179
Ph: +61 3 9730 9222
Fax: +61 3 9753 4100
Website: davey.com.au

Customer Service Centre
Ph: 1300 369 100
Fax: 1300 369 119
E-mail: sales@davey.com.au

NEW ZEALAND
7 Rockridge Avenue,
Penrose, Auckland 1061
Ph: +64 9 570 9135
Fax: +64 9 527 7654
E-mail: sales@daveynz.co.nz
Website: daveynz.co.nz

Customer Service Centre
Ph: 0800 654 333

REST OF WORLD
6 Lakeview Drive,
Scoresby, Australia 3179
Ph: +61 3 9730 9121
Fax: +61 3 9753 4248
E-mail: export@davey.com.au
Website: davey.com.au

