



The range of Quick Coupling Turf Valves is extensive with models to suit almost every need.

QUICK COUPLING TURF VALVES

- **Rugged, strong. Designed for use with movable or removable turf sprinkler equipment in commercial installations.**
- One or two piece brass construction for a wide range of applications.
- Weighted cover to prevent dirt entry.
- Optional lockable vinyl cover uses valve key handle as locking key.
- New lilac colour rubber top to indicate reclaimed water use.
- Australian Made

ORDERING Quick Coupling Valves

Code	Description
1013451	#2 20 mm Two Piece Body
1013453	#33 25 mm One Piece Body
1013454	#3B 25 mm Two Piece Body
1013455	#4 32 mm Two Piece Body
1013456	#6 40 mm Two Piece Body
1013450	TR33 25 mm One Piece Body

Rubber Cover

Code	Description
1013463	RT Rubber Top & Screw, All Models
1013457	Lilac Rubber Top

Valves with Locking Cover

Code	Description
1013464	#33LU 25 mm One Piece Body
1013465	#3BLU 25 mm Two Piece Body



Valve Keys are used to open Quick Coupling Valves.

QUICK COUPLING VALVE KEYS

- Provides instant sprinkler or hose swivel connection to quick coupling valve.
- Durable dezincified brass construction.
- Doubles as security key on lock-up models.



Swivel Elbows are used to prevent hose kinking when connecting a hose to a coupler.


SWIVEL ELBOWS

- Provides swivel connection of hose to coupler to prevent hose kinking.
- Durable dezincified brass construction.

ORDERING Swivel Elbows

Code	Description
1013482	#3 25 mm Female x 25 mm Male Swivel Elbow
1013484	#5 40 mm Female x 32 mm Male Swivel Elbow

Quick Coupling Valves - Flow vs Pressure

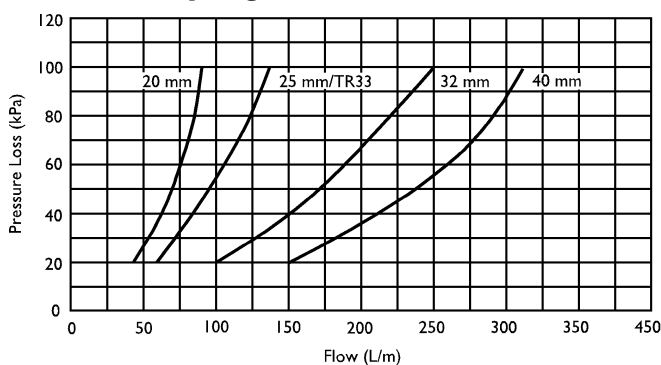

ORDERING Quick Coupling Valve Keys

Code	Description
1013470	#2 25 mm (M) 20 mm (F), 2 Lug Valve Key, suit 1013451
1013472	#3B 25 mm (M), 20 mm (F), 2 Lug Valve Key, suit 1013453, 1013454
1013473	#4 32 mm (M) 25 mm (F), 1 Lug Valve Key, suit 1013455
1013474	#6F 32 mm (F), 1 Lug Valve Key, suit 1013456
1013475	#6M 40 mm (M), 1 Lug Valve Key, suit 1013456
1013469	TR33, 25 mm (M), 1 Lug Valve Key, suit 1013450