

SUBMERSIBLE POND PUMP

Model Number: **DYNAPOND 7000, 8000 & 15000**

DEPEND ON
DAVEY



POND PUMP

PRODUCT DESCRIPTION

Submersible pond pumps with adjustable inlet strainer. Designed for continuous operation - 24 hours a day, 7 days week.

APPLICATIONS

- Fountains
- Pond recirculation
- Waterfalls and other water features
- Koi & fish ponds
- Freshwater aquaculture

FEATURES & BENEFITS

Open impeller, centrifugal pump with adjustable strainer

- Pump can pass small soft solids in the water without blockage

Can be operated horizontally or vertically

- Easy to install
- Easy to conceal

Suction strainer easy to remove for cleaning

- Easy maintenance
- Efficient operation

Made from corrosion resistant materials

- Long service life

No oil in motor or seal

- Safe for fish ponds

Suitable for continuous operation

- No need to shut off water features to allow pump to rest or cool

Partial double case design to discharge water past the motor shell


- Improved motor cooling
- Longer life in continuous operation

Automatic resetting motor overload

- Helps protect the pump in the even of a blockage or jam

Organic green UV resistant thermo plastic casing

- Makes it easier to hide in the pond
- Maintains it's quality appearance longer

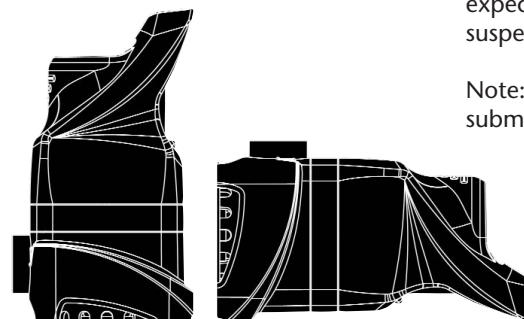

OPERATING LIMITS

Model	7000	8000	15000
Capacities to (lpm)	110	140	250
Maximum total head (m)	5.5	7.0	9.0
Maximum submergence (m)		3	
Max. water temperature		35°C	
Outlet size		1 1/4" BSP(F)	
Strainer adjustment		5mm (min) 10mm (max)	

Suitable Fluids:

Clean pond water of neutral pH containing up to 1% (<10mm OD) small soft organic solids (some wear should be expected while pumping hard solids in suspension).

Note: Suitable for fully submerged applications only.



TECHNICAL SPECIFICATIONS

MATERIALS OF CONSTRUCTION

PART	MATERIAL
Impeller	Glass filled noryl
Suction strainer	Glass filled polypropylene
Outer casing	Glass filled polypropylene
Pump casing	Glass filled polypropylene
Shaft seal	V rubber & ceramic
Shaft seal elastomer	Nitrile rubber
Pump shaft	416 stainless steel
Orings	Nitrile rubber
Motor shell	304 stainless steel
Fasteners	A2 (304) stainless steel
Power supply leads	HO7RN-F oil resistant

ELECTRICAL DATA

Model	7000	8000	15000
Electrical lead length	5m		
Phase	Single		
Supply voltage	220-240		
Supply frequency	50Hz		
Full load current	0.8A	1.3A	3.8A
Input power (P ₁)	200w	280w	750w
Insulation class	Class F		
Speed	2 pole, 2950rpm		
Motor starting	P.S.C.		

INSTALLATION & PRIMING

For deep ponds use a rope to position and retrieve the pump. Never lower or retrieve the pump using the power lead as this may damage the cable entry seals, causing water leaks and unsafe operation.

Don't use this product for recirculating or filtering swimming pools, spas, etc. While these pumps are built to high safety standards, they are not approved for installations where people will be in the water while they are operating.

Don't pump abrasive materials. Sand and grit in the water being pumped will accelerate wear, causing shortened pump life.

Keep your pump clean, particularly in situations where fibrous materials may get bound around the pump shaft. Regular inspection and cleaning will extend pump life.

Don't run your pump dry. Dynapond models must be switched off manually or by way of an external float/level switch when the water level is reduced to the top of the pump housing.

This literature is not a complete guide to product usage. Further information is available from your Davey dealer, Davey Customer Service Centre and from the relevant product Installation and Operating Instructions. This data sheet must be read in conjunction with the relevant product Installation and Operating Instructions and all applicable statutory requirements. Product specifications may change without notice.

© Davey is a registered trademark of Davey Products Pty Ltd. © Davey Products Pty Ltd 2002.

DEPEND ON
DAVEY

Davey Products Pty Ltd

Member of the GUD Holdings Ltd Group

ABN 18 066 327 517

Head Office and Manufacturing

6 Lakeview Drive,
Scoresby, Australia 3179
Ph: +61 3 9730 9222
Fax: +61 3 9753 4100
Website: www.davey.com.au


Customer Service Centre

Ph: 1300 367 866
Fax: 1300 369 119
E-mail: sales@davey.com.au


Interstate Offices

Sydney - Brisbane - Adelaide
Perth - Townsville

HYDRAULIC PERFORMANCE

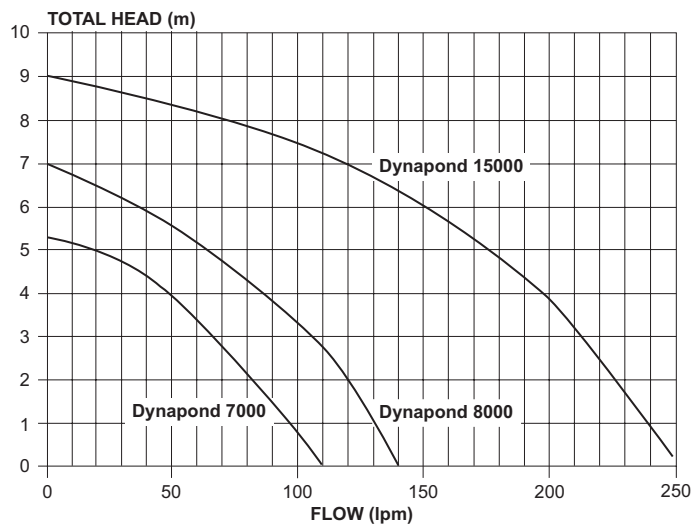

DIMENSIONS

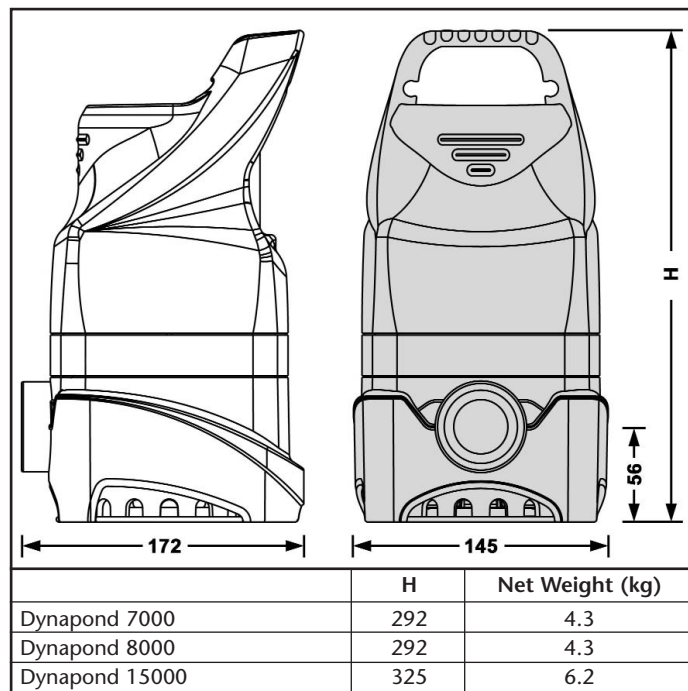

All dimensions in mm unless otherwise stated.

International

6 Lakeview Drive,
Scoresby, Australia 3179
Ph: +61 3 9730 9121
Fax: +61 3 9753 4248
E-mail: export@davey.com.au

Germany

Kantstrasse 47,
04275 Leipzig
Ph: +49 341 301 0412
Fax: +49 341 301 0413
E-mail: akrenz@daveyeurope.com

New Zealand

2 Rothwell Avenue,
North Harbour, Auckland 1330
Ph: +64 9 914 3680
Fax: +64 9 914 3685
E-mail: sales@daveynz.co.nz

USA

1005 N. Commons Drive
Aurora, Illinois 60504
Ph: +1 630 898 6976
Fax: +1 630 851 7744
Website: www.daveyusa.com
E-mail: sales@daveyusa.com