



PRODUCT INFORMATION

PGV Valves

*Rugged, Professional-Grade Valves Designed to
Handle the Full Range of Landscape Needs*





TABLE OF CONTENTS

Product Overview 3

Features and Benefits..... 4

Accu-Set™ Dial Control Pressure Regulation..... 8

Accu-Set™ Installation Instructions 8

Product Comparisons..... 9

Technical Information..... 10

Installation Details 11

Valve Operation 12

PGV Replacement Parts 13

PGV Valves

PRODUCT OVERVIEW

The same HUNTER quality found in all of our remote control valves is also found in the PGV family. This Professional Grade Valve is a solid, heavy-duty performer designed to satisfy the requirements of the most demanding job sites.

Meets the Needs of All Residential/Commercial Projects

The versatility of the PGV valve is the answer to anyone who demands options. The valve is offered as an angle, globe or globe/angle combination in a full range of sizes, including 1" with or without flow control, 1½", and 2". Flow capability ranges from a low of 1 gpm (0.23 m³/hr, 3.8 l/m) all the way up to 120 gpm

(27.2 m³/hr, 454.2 l/m).

Available as an option, the Hunter Accu-Set™ valve pressure regulator is an important tool for the professional installer. The Accu-Set™ is the product of choice for installation on PGV valves when the static supply pressure is just too high for sprinkler operation or when the irrigation main lines need to be at maximum pressures due to long pipe runs. Also, the Accu-Set™ is the ideal pressure regulator to use when different irrigation zones require different outlet pressures due to product specifications, such as sprays and rotors. Easy to install and easy to read, this dial-in pressure regulating module automatically adjusts as needed to provide an accurate and consistent working pressure in the zone piping.

Designed for Years of Life

Hunter developed the PGV valve with its multitude of features, because of a market need for a strong product with dependable performance.

The rugged, extremely tough body and bonnet contribute to a high pressure rating of 150 psi (10.3 bars, 1034 kPa). In addition, the valve features captive bonnet screws,

diaphragm and a captive solenoid plunger. Plus, the heavy-duty Hunter solenoid, with its 5-year warranty, is sure to keep everything working for years and years.

Easy to Install, Easy to Maintain

Maintenance is an ongoing reality to any project and like all Hunter products, the easy-maintenance PGV was designed with the installation and service needs of the professional installer in mind. Offering a globe/angle configuration in one valve allows the installer to readily place the valve for easy access. The PGV's diaphragm, solenoid plunger, and bonnet screws are all captive parts, eliminating the chance of lost parts. Through-holes in the body allow dirt to fall through the screw holes instead of allowing it to pack at the bottom, where it can make it impossible to tighten the screw upon reassembly.

The bonnet screws used in the PGV line are unique to Hunter valves. These screws, specifically designed for use in plastic, thread quicker and truer into the valve body. They are compatible with a variety of tools: a hex nut driver, a Phillips screwdriver or slotted screwdriver for easy servicing. When installing irrigation systems, something as simple as a bonnet screw design is all that it takes to save time and money.





FEATURES AND BENEFITS

Globe or Angle Models...

Flexibility in design

Many times the irrigation main line is installed much deeper than the system's lateral lines. This may be due to local codes or for freeze protection. For these situations, Hunter offers 1 1/2" and 2" valves with a globe/angle configuration in one valve. The globe configuration offers the best choice for those systems that have the main line at the same depth as the laterals. The angle configuration allows the installer to place the valve on top of a deep main line, which allows easy access to the valve for maintenance.


In addition, the PGV angle configuration boasts a lower pressure loss across the valve compared to a globe style valve, providing a big advantage on systems that may experience low operating pressures.

Body Options...

Maximum choices, minimum effort

Hunter is aware of the many different valve requirements that are prevalent in today's irrigation market. With that in mind, the PGV is designed as a very adaptable valve in the residential/commercial market. The PGV is available with a variety of inlet and outlet sizes and configurations: NPT, BSP, Male x Barb, Male x Male, and Slip.

The barb outlet valves have become an instant hit in the colder regions of the US, where polyethylene pipe is frequently used for laterals. Contractors report their installation times have decreased tremendously when this valve is used on their jobs. Eliminating the addition of an extra adapter or two to the manifold not only saves time and money, but also saves on the possibility of leaks.

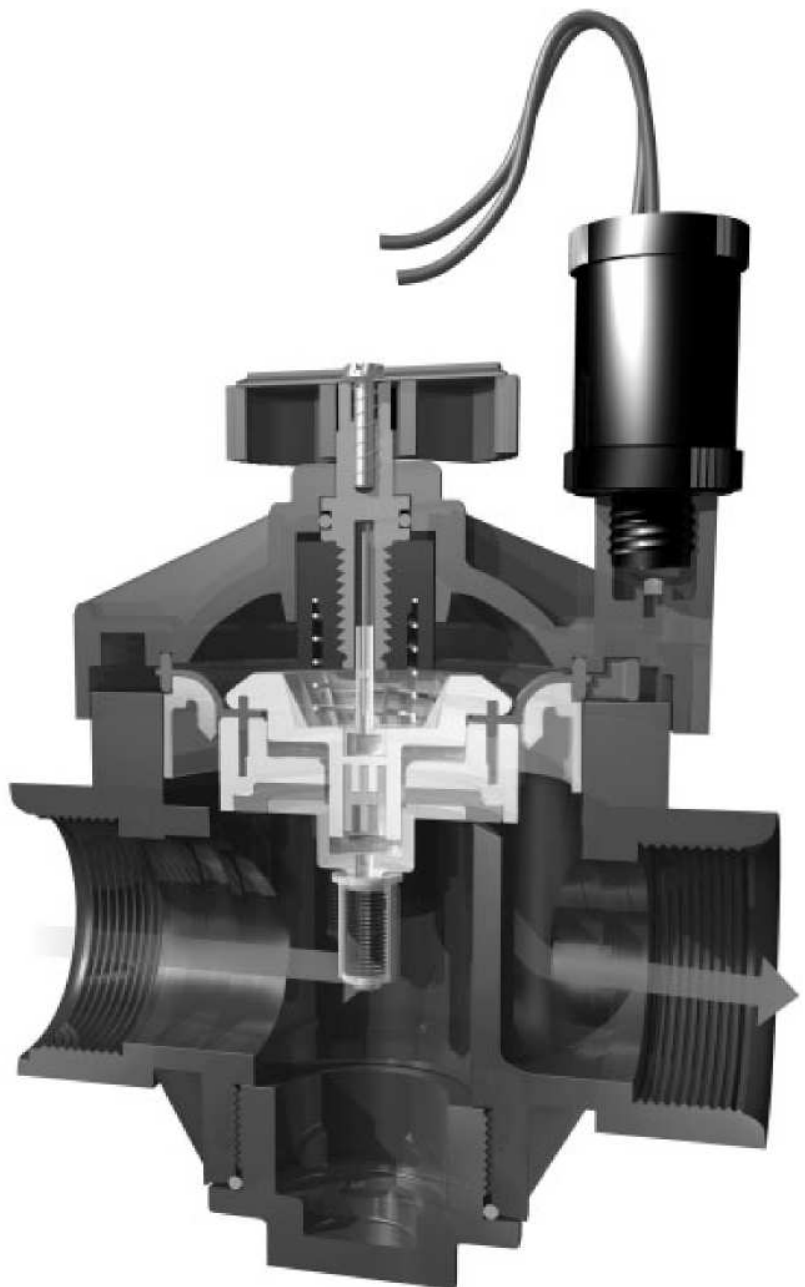

PGV Valves

The many options available:

1" GLOBE

with FLOW CONTROL
fpt x fpt — NPT, BSP mpt
x mpt — NPT, BSP mpt x
barb — NPT, BSP slip x
slip



1" GLOBE

without FLOW CONTROL
fpt x fpt — NPT, BSP
mpt x mpt — NPT, BSP
mpt x barb — NPT, BSP
slip x slip



*Note: The 1" barb is sized for
USA poly markets only.*

1" ANGLE

with FLOW CONTROL
fpt x fpt — NPT



1" ANGLE

without FLOW CONTROL
fpt x fpt — NPT



1 1/2" GLOBE/ANGLE

with FLOW CONTROL
fpt x fpt — NPT, BSP



2" GLOBE/ANGLE

with FLOW CONTROL
fpt x fpt — NPT, BSP



Barbed Connections...

*Poly pipe connections
made easy*



An overwhelming request
by Hunter valve users was
to develop a valve

with a barb outlet connection
built into the valve for poly pipe users.
Hunter responded with four 1" models to
choose from. The 1" globe with flow control
in MNPT and MBSP threads and the 1"
globe without flow control in both MNPT
and MBSP threads are now available. With
all of these models, the time-saving benefits
have proven to be substantial for the
installer, because they no longer need to
thread adapters or nipples wrapped with
Teflon tape into the valve to attach to poly
pipe systems.

Flow Range...

*Highly versatile valve for all flow
requirements*

The flow range of the PGV is exactly what
installers are looking for in 1", 1 1/2", and 2"
valves. Systems requiring a flow rate as low
as 1 gpm (60 gph), such as for low-volume
irrigation, are easily accommodated with the
1" PGV. Also, irrigation systems running up
to 120 gpm per zone, which can be found on
large commercial sites, are well within the
2" valve's designed capabilities.

High-grade materials used for a 150 psi rating...

Made of durable materials to resist wear

If you are in the market for a valve that
needs to take the pressure, the PGV is your
choice. Featuring solid heavy-duty
construction built with an ABS skirted
bonnet, this valve takes up to a constant 150
psi without regard to hot summer
temperatures. The superior design of the
PGV helps eliminate any reduction in
performance when temperatures go up: a
common occurrence with 100% PVC
constructed valves.



Heavy-duty Solenoid...

Provides dependable operation and long life

The entire line of Hunter valves has something in common: the same heavy-duty five-year warranty solenoid. Installers will find that not having to stock two or three different solenoids for valves of the same manufacturer are a real plus. Another plus is the solenoid's captive plunger, which enables easy servicing of the solenoid but eliminates the chance for any lost internal parts.

It only takes 1½ turns to remove or replace the solenoid which makes twisted solenoid wires a non-issue (a tremendous benefit to installers or maintenance people who work with valves).

The Hunter solenoid is unique because it operates on a reverse flow principle. The center hole in the solenoid bowl is an inlet port, instead of an exhaust port. When installing long wire runs, this solenoid is very efficient, especially under high system pressures.

A big advantage to this reverse flow action is that it reduces potential large pressure spikes against the valve. Such spikes could cause damage not only to the valve, but to other components of the irrigation system as well. With the PGV, when a surge pressure spike hits the closed valve, the solenoid plunger will open slightly to allow the spike to travel downstream and dissipate through the zone piping, minimizing any damage that could occur. The solenoid plunger then closes immediately, preventing unscheduled system operation.

Captive Bonnet Screws, Diaphragm and Solenoid Plunger...

No lost parts during servicing

When servicing is required, the PGV is the valve that makes it easy. The screws, captive within the bonnet, are designed to be removed by a nut driver, Phillips, or slotted screwdriver. Another unique characteristic to the PGV line is the type of screw used. Specifically designed for use in plastic, the screw sports a



large thread gain, allowing it to thread quicker and truer into the valve body.

In addition, all parts are captive within the solenoid (a great feature in a valve, assuring those parts will not be lost in the mud). The PGV also features screw through-holes in the valve body for trouble-free screw placement. If dirt gets into these holes it's no problem: as the screw is turned into the body, the dirt comes out the bottom. (It sounds simple, but other brands actually require removal of the valve to clean out the debris.)


Captive bonnet screws

Fully Supported Diaphragm...

Prevent stress failure in tough conditions

The PGV diaphragm is fully supported by an ingenious diaphragm support ring designed to prevent premature stress failure. The ring is also designed with small holes in it. These holes allow water to keep the diaphragm from sticking to the support ring after periods of non-use, such as

before the landscaping is installed or winter shutdowns

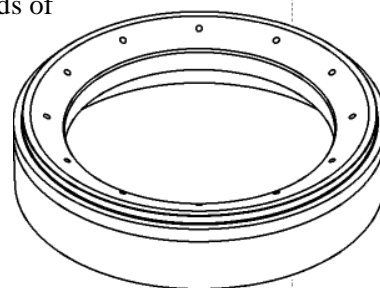

Diaphragm support ring prevents stress failures.

PGV Valves

Debris Tolerant...

Designed to eliminate failure caused by debris


With the PGV valve installed in the irrigation system, callbacks for weeping valves are a thing of the past. The PGV is highly debris tolerant because of its “crowned” body seat and a revolutionary new polymer that is used in the diaphragm

seat assembly. By virtue of the fact that the body seat is crowned it will not allow any contaminants

to catch during valve closing making it very difficult for debris to become trapped by the diaphragm. If debris were to become imbedded

in the diaphragm seat, the polymer material utilized in the

diaphragm seat retains its original shape after the imbedded debris is flushed through the valve.

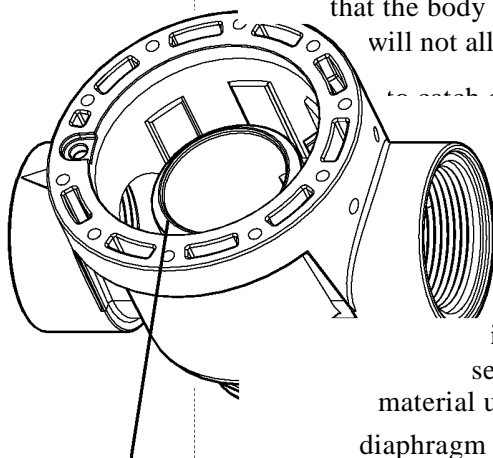

Crowned body seat

Adjustable Flow Control With Non-Rising Handle...

Flow adjustment and servicing made easy


Flow management is a simple process when using the Hunter PGV with its non-rising flow control handle in the 1½" and 2" sizes. A non-rising handle means

the valve can be placed closer to the valve box lid for easier servicing.

When fine tuning the system, adjust to the desired zone flow either by hand or using a valve key. If necessary, the easy-to-turn flow control handle completely shuts the

valve off without the possibility of damage

to the diaphragm, even under maximum pressure and flow conditions

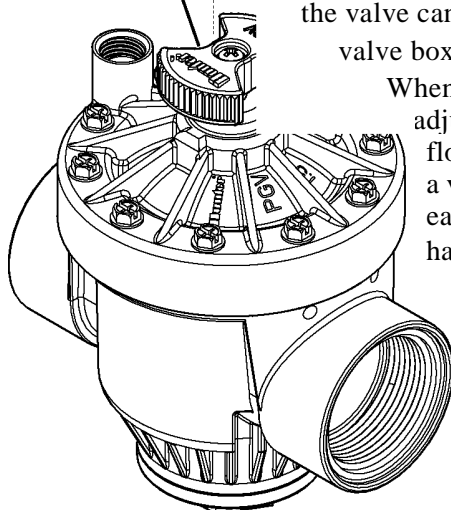

Non-rising flow control handle

Optional Flow Control in 1" Sizes

Facilitates flow management as needed

The 1" PGV can be ordered with or without an optional flow control stem. With the flow control option, zone water pressure and flow can be managed right at the valve for optimum efficiency. A removable flow control handle, generously sized for easy gripping, makes flow adjustment a quick and easy process.

Heavy-duty Bonnet...

Designed to provide maximum durability

Through repeated testing of valve designs, the PGV has incorporated in it a bonnet that goes beyond the typical plastic valve bonnet. The design features a skirt around the perimeter of the bonnet, which gives it incredible rigidity or “hoop strength.” An example of this would be the difference in rigidity between a Styrofoam cup with a lid attached and one without a lid attached. Without a lid, the cup is very malleable, but when a lid is attached the cup walls are strengthened tremendously.

Bonnet Air Relief...

Air release to minimize system stresses

The PGV is designed with a patent pending special air relief feature that facilitates the removal of any air bubble from the top underside of the bonnet. The removal of air facilitates the elimination of water hammer. When the flow control stem is pushed downward, any air trapped in the valve is released. The water pressure will then force the stem back up into place without leaking.

Internal Manual Bleed...

Completely dry manual operation

For fast manual operation, a quick ½ turn of the solenoid allows water to bleed off of the top of the diaphragm and, as a result, opens the valve. All the water goes through the valve, which means no more water continuously leaking into valve boxes.

Accu-Set™ Dial Control Pressure Regulation...

For use on 1" without flow control, 1½", and 2" valves

Exact pressure settings are a certainty every time with Hunter's Accu-Set™ pressure regulating module with its easy-to-read dial settings. This dial assures exact downstream pressure between 20 and 100 psi (1.4 to 7.0 bars, 138 to 689 kPa). There are no extra gauges to carry for pressure adjustments or inspection. (A schraeder valve is included on the unit for job specifications requiring checking and setting using a gauge only.)

The Accu-Set™ dial-in module provides an accurate working (or dynamic) pressure to the zone. The module constantly adjusts as needed to provide a consistent outlet pressure regardless of inlet pressure variations.

The Accu-Set™ pressure regulator is an important tool a professional installer will use when the irrigation main lines need to be at maximum pressures due to long pipe runs or when static supply pressures are too high for sprinkler operation. Also, the Accu-Set™ is the product of choice when different zones require different outlet pressures due to product specifications, such as large rotor sprinklers zoned off the same main line as sprayheads.


The benefit of the Accu-Set™ is that the irrigation system does not need to be pressurized to adjust it, resulting in a very fast installation. With this unique pressure regulating module, just set the easy-to-read dial to the desired pressure, with or without the system operating. The pressure dialed in is the pressure delivered to the zone.

The optional Accu-Set™ pressure regulating module is easy to retrofit on all ICV valves, as well as 1" without flow control, 1½" and 2" field installed PGV valves. On systems determined to have high-pressure problems after installation, the amount of time saved in labor, along with reduced costs, is considerable. That's because the Accu-Set™ is installed without


a hassle, without cutting pipe and without replacing valves.

Accu-Set™ Installation Instructions

1. Remove the solenoid from the Hunter PGV irrigation valve. (The 1" valve with flow control is not designed for use with the Accu-Set™.)

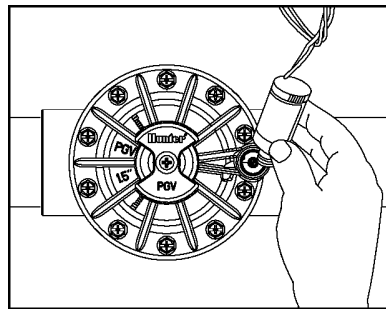


3. Thread the Accu-Set™ into the solenoid area of the PGV.

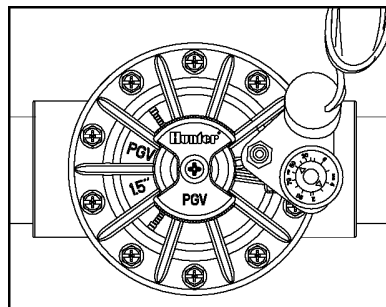

5. Thread the solenoid into the Accu-Set™.

Accu-Set™ Pressure Regulator Adjustment

1. Turn the clear dial on the top of the Accu-Set™ until the arrow underneath the clear dial is pointing to the desired downstream pressure.
2. The white colored scale is for PSI, the yellow colored scale is for BAR.



PGV Valves

PRODUCT COMPARISONS

| FEATURES | Hunter PGV | Rainbird PGA | Irritrol 200B | Ioro 252 | Nelson 7900 | Weathermatic 21000 |
|---|---------------|-----------------|------------------|-------------|----------------|-----------------------|
| 150 PSI Rated Operating Pressure ~ | | ~ | ~ | ~ | ~ | ~ |
| Models to Accommodate Globe/Angle Configuration Flow Control with Non-Rising Handle Internal Manual Bleed | | | ~ | ~ | ~ | |
| Bonnet Air Relief | | | ~ | ~ | ~ | |
| Captive Diaphragm | | | | | 1" model | |
| Captive Bonnet Screws | ~ | | ~ | | 1" model | |
| Triple Tool Stainless Steel Bonnet Screws | | | ~ | | 1" model | |
| Easy Bonnet Removal (4 Screws on 1" Valve) Less Than 1 1/2 Turns to Remove Solenoid | | | | | ~ | |
| Reverse-Flow Solenoid Design to Reduce Line Surges | ✓ | | | | | |
| Interchangeable Solenoid with All Plastic Valves in Catalog | ✓ | | ~ | | ~ | |
| Female Inlet/Outlet NPT / BSP Option | ✓ | ✓ | ~ | ~ | ~ | ~ |
| Male Inlet/Outlet MPT / Barb Option | ✓ | | | | | |
| 1" Valve Inlet/Outlet Solvent-Weld Slip Option | ✓ | | | | | |
| Vent Holes in Diaphragm Support | | | | | | |
| Dial to Setting Pressure Regulator Option without extraneous tubing Less Than 2.5 PSI Loss at 25 GPM in 1" Valve Less Than 3.1 PSI Loss at 100 GPM in 2" Valve Optional Conduit Cover | | | ~ | ~ | ~ | |

PRODUCT EXPLANATION

| | | |
|---|--|--|
| EXAMPLE: PGV - 100G - S - AS | | |
| MODELS PGV-100G= 1", Globe Valve, no Flow Control PGV-101G= 1", Globe Valve, with Flow Control PGV-100A= 1", Angle Valve, no Flow Control PGV-101A= 1", Angle Valve, with Flow Control PGV-100MM= 1", Globe Valve, no Flow Control, male threads PGV-101MM= 1", Globe Valve, with Flow Control, male threads PGV-100MB= 1", Globe Valve, no Flow Control, male thread x barb PGV-100MB= 1", Globe Valve, with Flow Control, male thread x barb PGV-151= 1 1/2", Globe/Angle Valve, with Flow Control PGV-201= 2", Globe/Angle Valve, with Flow Control | OPTIONS S = Slip x Slip (1" models only) B = BSP Threads | OPTIONS USER INSTALLED AS = Accu-Set™ Pressure Regulator (1" without Flow Control, 1 1/2" and 2" models only) R = Reclaimed Water Identification Handle |



TECHNICAL INFORMATION

MODELS

PGV-100G – 1" plastic globe valve

PGV-101G – 1" plastic globe valve with flow control

PGV-100A – 1" plastic angle valve

PGV-101A – 1" plastic angle valve with flow control

PGV-100MM – 1" plastic globe valve, male x male threads

PGV-101MM – 1" plastic globe valve with flow control, male x male threads

PGV-100MB – 1" plastic globe valve, male thread x barb

PGV-101MB – 1" plastic globe valve with flow control, male thread x barb

PGV-151 – 1 1/2" plastic globe/angle valve with flow control

PGV-201 – 2" plastic globe/angle valve with flow control

DIMENSIONS

- 1" Globe – 5" H (13 cm) x 4 1/2" L (11 cm) x 2 1/2" W (6 cm)
- 1" Angle – 5 1/2" H (14 cm) x 3 1/2" L (9 cm) x 2 3/4" W (7 cm)
- 1 1/2" Globe/Angle – 7 1/2" H (19.1 cm) x 5 3/4" L (14.6 cm) x 4 1/2" W (10.8 cm)
- 2" Globe/Angle – 8" H (20.3 cm) x 6 3/4" L (17.1 cm) x 5 1/4" W (13.3 cm)

OPERATING SPECIFICATIONS

- Flow: 1 to 120 gpm
(0.23 to 27.2 m³/hr; 3.8 to 454.2 l/min)
- Pressure: 20 to 150 psi
(1.4 to 10.3 bars; 138 to 1034 kPa)
- Heavy-duty solenoid: 24VAC, 50/60 cycles, 400mA inrush current, 270mA holding current
- BSP Models: 24VAC, 50 cycle solenoid, 280mA inrush current, 190mA holding current

OPTIONS AVAILABLE

- Accu-Set™ pressure regulator
- Reclaimed water identification handle


| Pressure Loss in PSI | | | Pressure Loss in PSI | | | |
|----------------------|-------|-------|----------------------|---------|-------|-------|
| 1" Valve | | | 1 1/2" 2" | | | |
| GPM | Globe | Angle | GPM | Globe | Angle | Globe |
| 1 | 1.1 | 1 | 20 | 3.3 | 1 | 1 |
| 5 | 1.9 | 1 | 30 | 3.3 | 1 | 2 |
| 10 | 1.9 | 1 | 40 | 3.3 | 2 | 2 |
| 15 | 1.6 | 1 | 50 | 4.3.5 | 1 | 1 |
| 20 | 3.3 | 2 | 60 | 5.4 | 2 | 2 |
| 30 | 6.1 | 3 | 80 | 5.5.4.5 | 3 | 2 |
| | | | 100 | | 5 | 3 |
| | | | 120 | | 6 | 5 |

| Pressure Loss in Bars | | | Pressure Loss in Bars | | | |
|-----------------------|-------|-------|-----------------------|-------|-------|-------|
| 1" Valve | | | 1 1/2" 2" | | | |
| m ³ /hr. | Globe | Angle | m ³ /hr. | Globe | Angle | Globe |
| 0.23 | 0.08 | 0.07 | 4.54 | 0.21 | 0.21 | 0.07 |
| 1.14 | 0.13 | 0.07 | 6.81 | 0.21 | 0.21 | 0.07 |
| 2.27 | 0.13 | 0.07 | 9.08 | 0.21 | 0.21 | 0.14 |
| 3.41 | 0.11 | 0.07 | 11.36 | 0.28 | 0.24 | 0.07 |
| 4.54 | 0.23 | 0.14 | 13.63 | 0.34 | 0.28 | 0.14 |
| 6.81 | 0.42 | 0.21 | 18.17 | 0.38 | 0.31 | 0.21 |
| | | | 22.71 | | 0.34 | 0.21 |
| | | | 27.25 | | 0.41 | 0.34 |


| Pressure Loss in kPa | | | Pressure Loss in kPa | | | |
|----------------------|-------|-------|----------------------|-------|-------|-------|
| 1" Valve | | | 1 1/2" 2" | | | |
| l/min | Globe | Angle | l/min | Globe | Angle | Globe |
| 3.8 | 7.58 | 6.89 | 75.7 | 20.7 | 20.7 | 6.9 |
| 18.9 | 13.10 | 6.89 | 113.6 | 20.7 | 20.7 | 6.9 |
| 37.9 | 13.10 | 6.89 | 151.4 | 20.7 | 20.7 | 13.8 |
| 56.8 | 11.03 | 6.89 | 189.3 | 27.6 | 24.1 | 6.9 |
| 75.7 | 22.75 | 13.79 | 227.1 | 34.5 | 27.6 | 13.8 |
| 113.5 | 42.06 | 20.68 | 302.8 | 37.9 | 31.0 | 20.7 |
| | | | 378.5 | | 34.5 | 20.7 |
| | | | 454.2 | | 41.4 | 34.5 |

Charts based on full-open flow control position.


INSTALLATION DETAILS

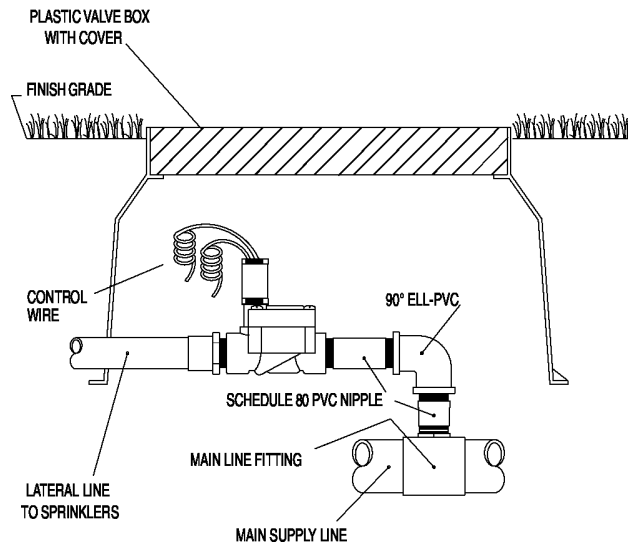


Hunter® 1" PG V-GLOBE

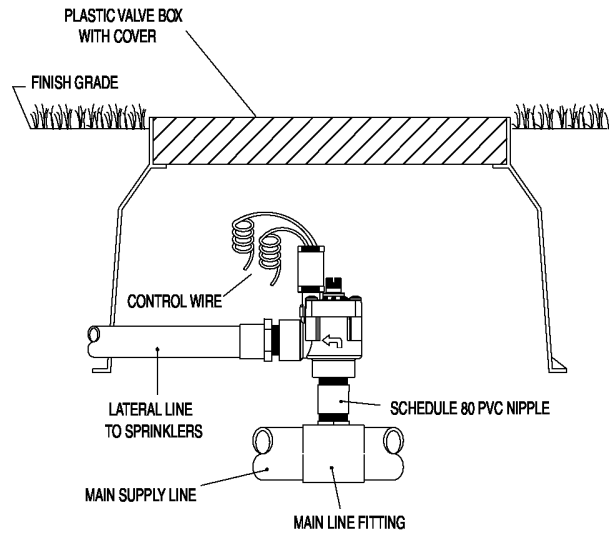

Hunter® 1" PG V-ANGLE

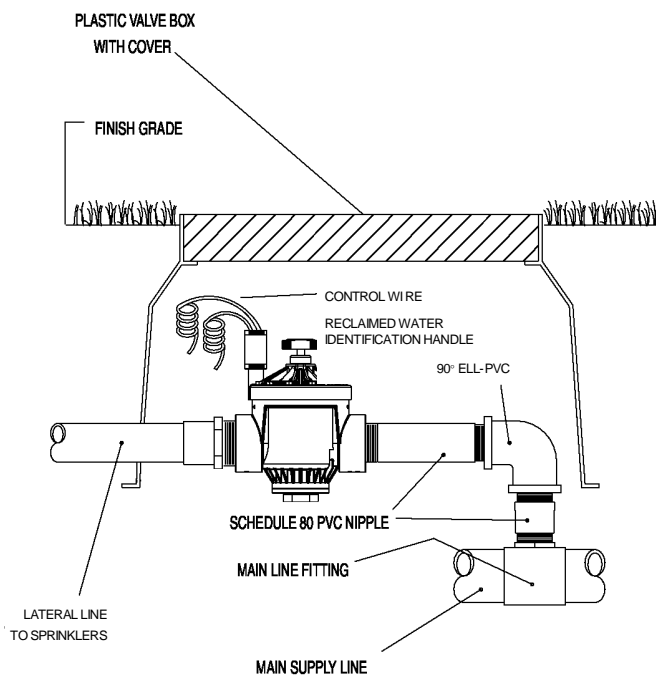

Hunter® 0" PG V-NP

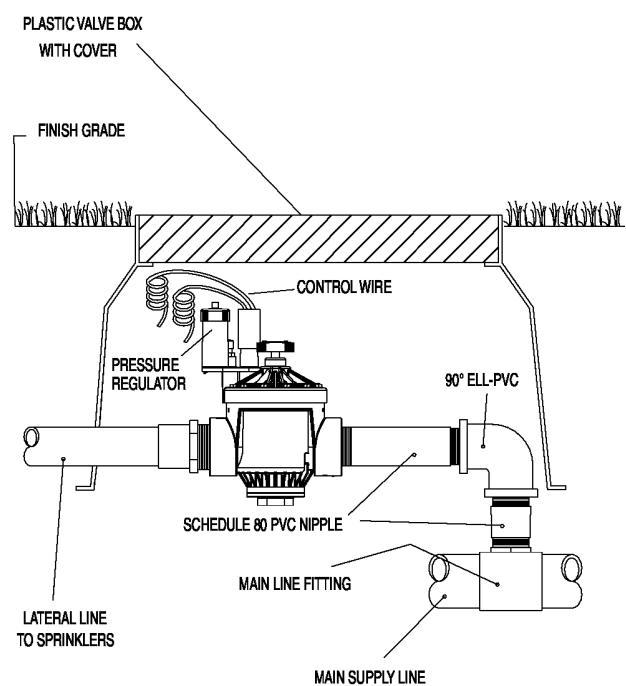

Hunter® 2" PGVW/PR

VALVE OPERATION

Basic Principles of Valve Operation Water enters the valve from the system main line and exerts a force against the center of the valve's diaphragm. A small orifice in the diaphragm allows the water to flow through to the upper chamber between the diaphragm and the bonnet. The water continues to travel on through a port in the bonnet to the solenoid area. The solenoid has a light spring loaded metal piston that, when the valve is closed, covers the inlet port hole. The surface area that the water comes in contact with on top of the diaphragm is greater than the

surface area on the bottom of the diaphragm, so the valve stays closed until the water in the upper chamber is released. (pressure x area = force)

Electrically Opening a Valve

When the solenoid coil is electrically charged, the current creates an electromagnetic field and pulls the piston off of the port hole seat allowing water to flow into the solenoid chamber, out of the solenoid exhaust port, and into the downstream pipe. The solenoid ports are larger than the orifice in the diaphragm, so the water flows out of the upper diaphragm/bonnet chamber faster than it is allowed to enter. The pressure on the top of the diaphragm is released through these ports, and the force from the mainline side pushes against the diaphragm and causes the valve to open.

Manually Opening a Valve

The same principle is at work when a valve is manually opened using the manual bleed. The pressure on the top of the diaphragm is released through the use of an internal or external bleed. The internal bleed on the ICV mechanically lifts the solenoid piston off of the upper chamber exhaust port allowing the water to be released into the downstream pipe. Some valves have an external bleed which allows water to exit the upper diaphragm chamber into the valve box.


Closing a Valve

When the controller turns off the low voltage current flow, the solenoid piston spring pushes the piston back over the inlet port, and stops the flow of water from going through the solenoid chamber and exhaust port. The upper diaphragm/bonnet chamber begins to fill, and soon reaches an equilibrium point when the psi (pounds per square inch) is the same on both sides of the diaphragm. The diaphragm spring continues to gently push on the diaphragm, closing the valve further. The combination of the spring exerting pressure on the diaphragm and the water building up in the upper chamber bring the valve to a closed position.

PGV REPLACEMENT PARTS


PGV-1 00G/101G

| Item | Description | Part No. |
|------|--|----------|
| 1 | Solenoid Assembly (Includes Parts 2 & 3) | 380500 |
| 2 | O-Ring | 262600 |
| 3 | Solenoid Seal | 364400 |
| 4 | Bonnet Screw | 424200 |
| 5 | Bonnet with Flow Control | 379405 |
| | Bonnet without Flow Control | 331105 |
| 6 | Diaphragm Spring | 266000 |
| 7 | Diaphragm Assembly | 332100 |
| 8 | Diaphragm Support Ring | 331300 |
| 9 | Body | |
| | Globe, NPT Thread | 331020 |
| | Globe, BSP Thread | 331025 |
| | Globe, Slip | 331030 |
| | Globe, Male X Male, NPT Thread | 433400 |
| | Globe, Male X Male, BSP Thread | 433405 |
| | Globe, Male X Barb, NPT Thread | 460700 |
| | Globe, Male X Barb, BSP Thread | 460705 |
| 10 | Flow Control Handle | 269200 |

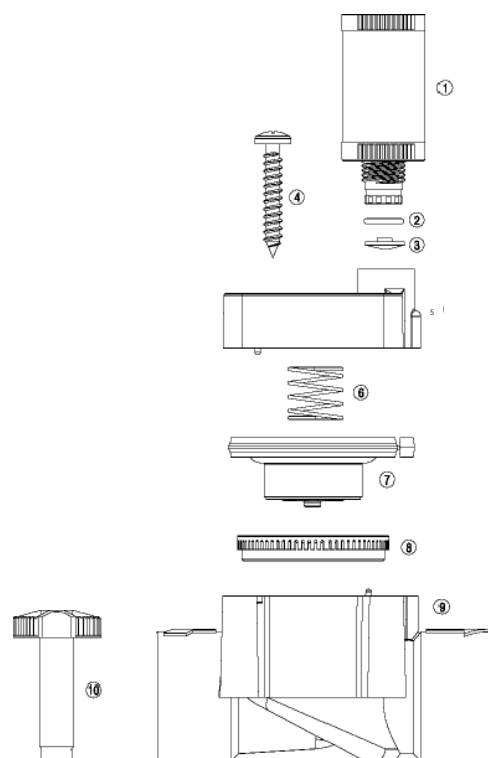

PGV-1 00A/101A


| Item | Description | Part No. |
|------|--|----------|
| 1 | Solenoid Assembly (Includes Parts 2 & 3) | 380500 |
| 2 | O-Ring | 262600 |
| 3 | Solenoid Seal | 364400 |
| 4 | Bonnet Screw | 424200 |
| 5 | Bonnet with Flow Control | 379405 |
| | Bonnet without Flow Control | 331105 |
| 6 | Diaphragm Spring | 266000 |
| 7 | Diaphragm Assembly | 332100 |
| 8 | Diaphragm Support Ring | 331300 |
| 9 | Body | 407000 |
| 10 | Flow Control Handle | 269200 |

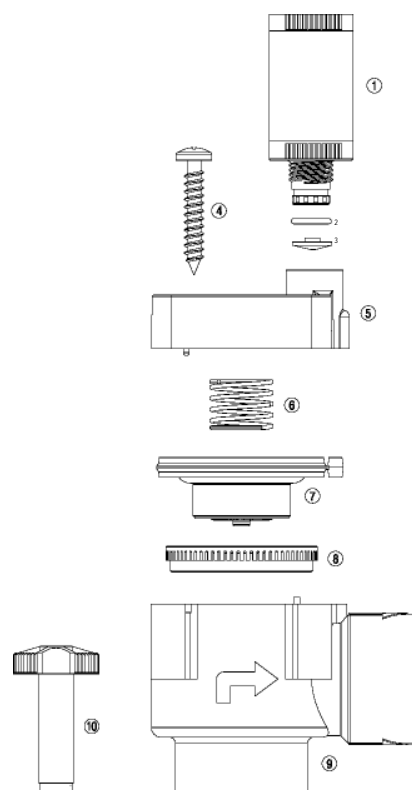

PGV REPLACEMENT PARTS

PGV-151G/201G

| Item | Description | Part No. |
|------|--|----------|
| 1 | Solenoid Assembly (Includes Parts 2 & 3) | 380500 |
| 2 | O-Ring | 262600 |
| 3 | Solenoid Seal | 364400 |
| 4 | Flow Control Handle Screw | 334000 |
| 5 | Flow Control Handle | 412700 |
| 6 | Bonnet Screw | 331105 |
| 7 | Bonnet | 414000 |
| | 1 1/2" | 415500 |
| 8 | Flow Control Stem | 421500 |
| | 2" | 414600 |
| 9 | Spring | 412300 |
| | 2" | 414200 |
| 10 | Diaphragm Assembly | 414100 |
| | 2" | 415600 |
| 11 | Diaphragm Support | 413100 |
| | 2" | 414800 |
| 12 | Body | 412400 |
| | 1 1/2" NPT | 412405 |
| | 1 1/2" BSP | 414300 |
| | 2" NPT | 414305 |
| | 2" BSP | 419200 |
| 13 | Body Plug without O-Ring | 419205 |
| | 1 1/2" NPT | 419300 |
| | 1 1/2" BSP | 419305 |
| | 2" NPT | 413900 |
| | 2" BSP | 415400 |
| 14 | Plug O-Ring | |
| | 1 1/2" | |
| | 2" | |

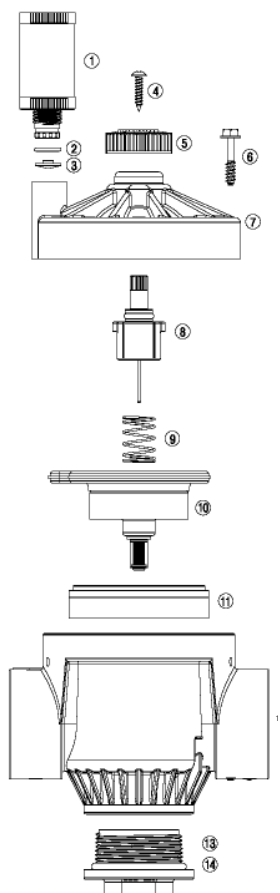

Accu-Set™

| Item | Description | Part No. |
|------|-----------------|----------|
| 1 | Adjustment Knob | 368500 |
| 2 | O-Ring | 262600 |
| 3 | Inlet Seal | 368200 |

