

DECORFOND

LEVELING BASE FOR DECORATIVE FINISH

code 3880019

Colorificio San Marco SpA gives priority to environmental protection and safety in the workplace. For this reason Colorificio San Marco constantly seeks to improve the quality of its products and their production cycles in order to reduce the overall impact on the environment and ensure quality and safety for customers.

This environmental data sheet shows the environmental information of DECORFOND: LCA, LEED and other information.

DECORFOND is a highly washable base product specifically developed to prepare indoor wall surfaces before the products VELATURE, PERLACEO, DECORI CLASSICI, CADORO, CADORO VELVET, ABC RIFLESSI, MARCOPOLO.

Formulated with an acrylic polymer-based binder, DECORFOND creates a film able to resist the alkalinity of plasters. Thanks to its particular formula it is able to perfectly even out the absorption of the support surface.

Thanks to its leveling powers, excellent opacity, good coverage and whiteness, DECORFOND is able to help attain the best results in terms of appearance and decoration.

LIFE CYCLE ASSESSMENT

Life Cycle Assessment (LCA) is a tool to quantify the environmental impact of a product or service throughout its entire life cycle. The LCA methodology, as defined by ISO 14040/44 [1-2], consists of four phases:

- goal and scope definition
- inventory analysis
- impact assessment
- interpretation

Goal and scope


The **goal** of this LCA [3] is to provide transparency about the environmental performance of DECORFOND, to create improvement options and support environmental communication. The functional unit is 1 kg of paint including packaging, with a spreading rate of 0.18 kg /sqm (average). The **system boundaries** include raw materials, their transportation, processing, packaging, distribution, use and packaging disposal. During the use phase the paint is hand-applied and the associated emissions are insignificant.

Inventory analysis

Primary data are used to the most significant processes, like the paint recipe, packaging and factory consumptions and emissions. Data refer to 2012 and are collected at the Colorificio San Marco's factory located in Marcon (VE). Secondary data originate from the ecoinvent v3 database [4]. The LCA calculations are performed with the LCA software SimaPro 8.0.3 [5].

Impact assessment

Life cycle impact assessment has been done with the method **PCR product group: UN CPC 3511**

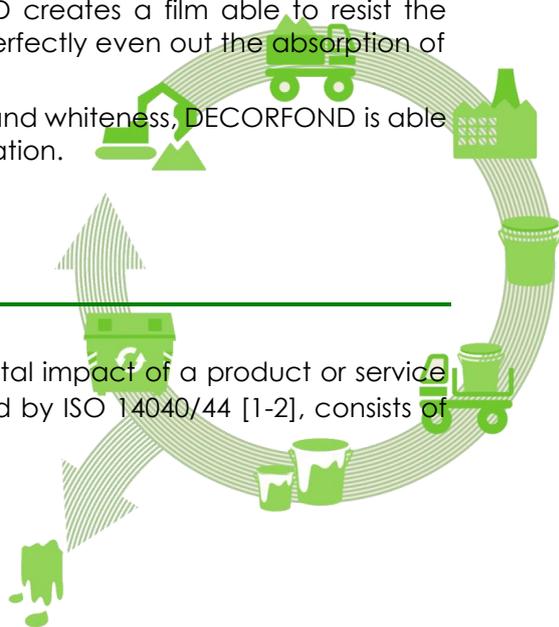

For further information: Colorificio San Marco Spa - Tel +39 041 4569322 - info@san-marco.it - www.san-marco.com

DECORFOND

LEVELING BASE FOR DECORATIVE FINISH

code 3880019

2014:5 on paint [6], as indicated in the EPD programme of the International EPD Consortium. This method consists of different environmental indicators including the Carbon Footprint, human toxicity, ecotoxicity, air emissions, water consumption and waste. Table 1 shows the LCA results.

Life cycle assessment verification

The LCA calculation system of Colorificio San Marco is verified by a third party in conformity with UNI EN ISO 11044:2006 and UNI EN ISO 11040:2006 [7]

Table 1: LCA results.

		Unit	Total	Upstream	Core	Downstream
Impact categories	Global Warming (100 yr)	kg CO ₂ eq	1,853	1,49	0,149	0,213
	Ozone layer depletion (ODPr)	mg CFC-11 eq	0,143	0,118	0,013	0,012
	Photochemical oxidation	g C ₂ H ₄ eq	0,894	0,857	0,023	0,013
	Acidification	g SO ₂ eq	19,21	17,97	0,61	0,62
	Eutrophication	g PO ₄ ⁻⁻⁻ eq	2,954	2,617	0,155	0,18
	Human toxicity, non-cancer	CTUh * 10 ⁻⁹	0,383	0,361	0,011	0,01
	Human toxicity, cancer	CTUh * 10 ⁻⁹	0,097	0,099	0,004	-0,006
	Ecotoxicity	CTUe * 10 ⁻³	17,4	21,66	1,284	-5,54
Waste						
	Hazardous waste	kg	0,010	0,009	0,000	0,001
	Non hazardous waste	kg	0,489	0,437	0,029	0,023
Air Emissions						
	VOC	g	0,196	0,175	0,012	0,008
	NM VOC	g	1,293	0,965	0,142	0,184
	SO ₂	g	13,62	13,2	0,262	0,158
	CO ₂ (fossil)	kg	1,722	1,376	0,14	0,205
	Methane (fossil)	g	4,155	3,658	0,285	0,211
	methane (biogenic)	g	0,174	0,172	0,003	0
	NO _x	g	5,31	3,877	0,577	0,855
Other						
	Material subjected to recycling	g	21,9	0,2	6,56	15,14
	Blue virtual water	kg	31,65	30,23	1,04	0,37

Interpretation

The LCA results indicate that the largest contributions come from upstream processes (i.e. raw materials). The Carbon Footprint of DECORFOND is 1.853 kg CO₂ eq.

The negative values are caused by the pallet reuse.

DECORFOND

LEVELING BASE FOR DECORATIVE FINISH

code 3880019

LEED

LEED means Leadership in Energy and Environmental Design. It is a voluntary program that provides third-party verification of green buildings. It provides building owners and operators a tool to understand their building's environmental performance and to create healthy indoor spaces.

In order to obtain LEED certification, projects must satisfy prerequisites and earn points (there is a threshold). The number of points the project earns determines its level of LEED certification.

LEED is a certification system that deals with the environmental performance of buildings based on overall characteristics of the project. Although LEED does not certify products and services of individual companies, products and services do play a role and can help projects with credit achievement.

The table below shows DECORFOND potential contribution to the different **LEED credits** of the LEED 2009 and LEED v4 (Leadership in Energy and Environmental Design) [8]. Table 2 shows the possible contribution of the paint to potential credits, if used properly.

Table 2: Potential LEED credits.

LEED 2009 Credits	Description	Possible points
MR credit 5	Regional Materials	1-2 points
IEQ credit 3.2	Construction Indoor air quality management plan	1 point
IEQ credit 4.2	Low-Emitting Materials Paints and Coatings	1 point
LEED V4 Credits	Description	Possible points
MR credit	Building Life-Cycle Impact Reduction	1-5 points
MR credit	Building product disclosure and optimization — Environmental Product Declarations	1-2 points
IEQ credit	Low-Emitting Materials	1-3 points)

More information are available on request

Colorificio San Marco does not guarantee that credits will be obtained by projects pursuing LEED certification. The designer or engineer will need to evaluate and verify if the project complies with the LEED requirements.

OTHER INFORMATION

Label VOC Dir. EU 2004/42/EU [9]

EU limit value (Dir. 2004/42/EC)
Cat. G: primer (water base): 30 g/l (2010)
DECORFOND Contains max: 30 g/l VOC

VOC Dir. 2004/42/EC : Content [9]

The actual content of VOC substances is less than 2 g/l

For further information: Colorificio San Marco Spa - Tel +39 041 4569322 - info@san-marco.it - www.san-marco.com

DECORFOND
LEVELING BASE FOR DECORATIVE FINISH
code 3880019

ECODESIGN INDEX

Counter of ecodesign activities affecting the coating, accomplished by the company.

N°	Activity item	Date
1	first issue	aug 2014

References

- [1] ISO 14040, 2006: Environmental management, Life cycle assessment, Principles and framework. CEN, EN ISO 14040:2006 (www.iso.org).
- [2] ISO 14044, 2006: Environmental management, Life cycle assessment, Requirements and guidelines. CEN, EN ISO 14044:2006 (www.iso.org).
- [3] Colorificio San Marco, LCA project, "Environmental Data Sheet" 2014.
- [4] Ecoinvent, 2013: Database ecoinvent v3. Swiss Centre for Life Cycle Assessment, (www.ecoinvent.ch).
- [5] PRé, 2014: LCA software SimaPro 8.0.3. PRé Consultants, the Netherlands (www.pre-sustainability.com).
- [6] PCR 2014:5. Paints and varnishes and related products. Product Category Rules (PCR) for preparing an environmental product declaration (EPD) for paints and varnishes and related products, the Swedish Environmental Management Council (www.environdec.com).
- [7] Verify n. 37585 30 april 2014 – CSQA Certificazioni Srl – Thiene (VI) Italy
- [8] USGBC, LEED 2009 and LEED v4: Rating System for New Construction and Major Renovations (new.usgbc.org/leed)
- [9] Directive 2004/42/CE of the European Parliament and of the Council on the limitation of emissions of volatile organic compounds due to the use of organic solvents in certain paints and varnishes and vehicle refinishing products and amending Directive 1999/13/EC (21 april 2004)

For further information: Colorificio San Marco Spa - Tel +39 041 4569322 - info@san-marco.it - www.san-marco.com